



**US Army Corps  
of Engineers®**  
Engineer Research and  
Development Center




## **Measuring Climate and Extreme Weather Vulnerability to Inform Resilience**

Report 1: A Pilot Study for North Atlantic Medium- and High-Use Maritime Freight  
Nodes

R. Duncan McIntosh, Elizabeth L. Mclean, and Austin Becker

November 2019

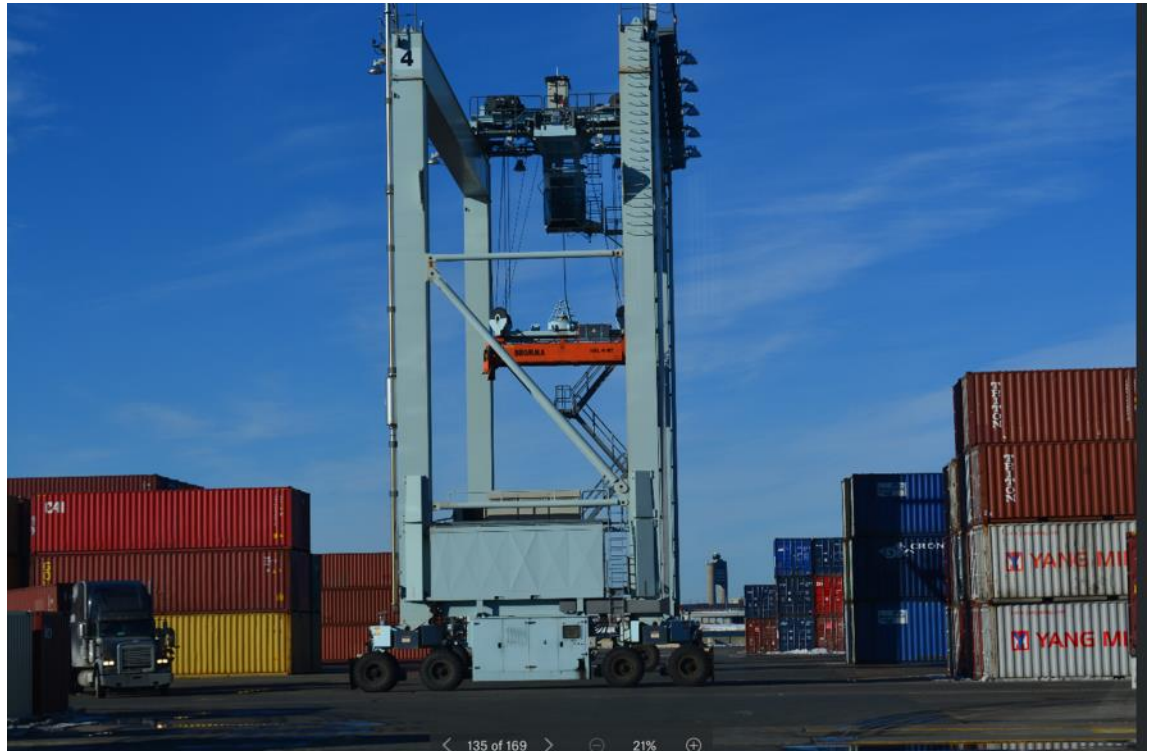

**The U.S. Army Engineer Research and Development Center (ERDC)** solves the nation's toughest engineering and environmental challenges. ERDC develops innovative solutions in civil and military engineering, geospatial sciences, water resources, and environmental sciences for the Army, the Department of Defense, civilian agencies, and our nation's public good. Find out more at [www.erdc.usace.army.mil](http://www.erdc.usace.army.mil).

To search for other technical reports published by ERDC, visit the ERDC online library at <http://acwc.sdp.sirsi.net/client/default>.

Cover photo: Massport, Boston, MA, by Rennie Meyers 2017

# **Measuring Climate and Extreme Weather Vulnerability to Inform Resilience**

## **Report 1: A Pilot Study for North Atlantic Medium- and High-Use Maritime Freight Nodes**

R. Duncan McIntosh, Elizabeth L. Mclean, and Austin Becker

*University of Rhode Island  
Department of Marine Affairs  
1 Greenhouse Road – Suite 205  
Kingston, RI 02881*

Report 1 of 2

Approved for public release; distribution is unlimited.

Prepared for U.S. Army Engineer Research and Development Center  
Coastal and Hydraulics Laboratory, Navigation Systems Research Program  
Vicksburg, MS 39180-6199

Under Work Unit 33143; Project W912HZ-16-C-0019

Monitored by U.S. Army Engineer Research and Development Center  
Coastal and Hydraulics Laboratory  
3909 Halls Ferry Road  
Vicksburg, MS 39180-6199

## Abstract

This research identified vulnerability indicators from open-data sources that represent the three components of vulnerability, as outlined by the Intergovernmental Panel on Climate Change: exposure, sensitivity, and adaptive capacity. With input from experts knowledgeable in port operations, planning, policy, and data, researchers refined a set of high-level vulnerability indicators to answer the following key questions: (1) how sufficient is the current state of U.S. seaport sector data for developing expert-supported vulnerability indicators for a regional sample of ports and (2) how can indicators be used to measure the relative vulnerability (i.e., exposure, sensitivity, and adaptive capacity) of multiple ports? Using open-data sources, this study developed an Indicator-Based Vulnerability Assessment methodology that integrates multiple vulnerability indicators for ports in the North Atlantic region. The Analytic Hierarchy Process, a technique for organizing and analyzing complex decisions using pairwise comparisons, was used to develop a ranking that matched 3 of the top-4 most vulnerable ports that were subjectively identified by port experts. This demonstrates strong promise for this methodological approach to measure seaport vulnerability to climate and extreme weather events. Indices of seaport relative vulnerability to climate and extreme weather can advance goals for a resilient Marine Transportation System by informing efforts and plans to prioritize and allocate limited resources.

**DISCLAIMER:** The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products. All product names and trademarks cited are the property of their respective owners. The findings of this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

**DESTROY THIS REPORT WHEN NO LONGER NEEDED. DO NOT RETURN IT TO THE ORIGINATOR.**

# Contents

<b>Abstract .....</b>	<b>ii</b>
<b>Figures and Tables.....</b>	<b>v</b>
<b>Preface .....</b>	<b>x</b>
<b>Executive Summary .....</b>	<b>xi</b>
<b>1 Introduction.....</b>	<b>1</b>
1.1 Report organization and research design .....	2
1.2 Background.....	4
1.2.1 Vulnerability of seaports .....	4
1.2.2 Terminology .....	6
1.2.3 Vulnerability assessments.....	9
1.2.4 Single vs. multi-seaport assessments.....	10
<b>2 Identification of Candidate Indicators of Seaport Vulnerability to Climate and Extreme Weather .....</b>	<b>12</b>
2.1 Introduction.....	12
2.1.1 Indicator-based assessments .....	12
2.1.2 Expert elicitation .....	13
2.2 Methodology .....	14
2.2.1 Step 1: Literature review to compile candidate indicators.....	17
2.2.2 Step 2: Vetting for data availability .....	18
2.2.3 Step 3: Mind mapping® exercise to refine the set of candidate indicators 19	
2.3 Conclusion .....	24
<b>3 Expert Evaluation of Seaport Climate and Extreme Weather Vulnerability Indicators.....</b>	<b>25</b>
3.1 Introduction.....	25
3.2 Methodology .....	25
3.2.1 Selection of experts for Visual Analogue Scale (VAS) survey .....	26
3.2.2 Online expert elicitation VAS survey.....	27
3.3 Results of VAS survey.....	29
3.4 Seven additional indicators suggested by port experts .....	33
3.5 Discussion of VAS results.....	34
3.5.1 Low expert-perceived correlation with adaptive capacity.....	35
3.5.2 Expert preference for place-based indicators .....	35
3.5.3 Variation of results for different expert-affiliation groups.....	36
3.5.4 Limitations and next steps .....	36
3.6 Conclusion .....	37
<b>4 Weighting Indicators via Analytic Hierarchy Process (AHP) .....</b>	<b>39</b>
4.1 Introduction.....	39

4.2	AHP .....	39
4.3	Methodology .....	40
4.3.1	Expert selection .....	40
4.3.2	AHP webinars with 37 port experts .....	41
4.4	Results of AHP-generated weights .....	47
4.5	Discussion .....	49
4.6	Conclusion .....	50
<b>5</b>	<b>Trialing a Prototype Composite Index of Seaport Climate Vulnerability .....</b>	<b>51</b>
5.1	Introduction .....	51
5.2	Methodology: Aggregating weighted indicators .....	51
5.3	Results of Weighted Sum Model (WSM): Composite indices of CENAD ports .....	52
5.4	Discussion .....	57
5.4.1	Adaptive capacity considered highly important .....	58
5.4.2	Limitations .....	58
5.5	Conclusion .....	60
<b>6</b>	<b>Conclusion .....</b>	<b>61</b>
	<b>References .....</b>	<b>63</b>
	<b>Appendix A: Terminology Definitions .....</b>	<b>71</b>
	<b>Appendix B: Mind maps® from Expert Group .....</b>	<b>72</b>
	<b>Appendix C: Databases for Candidate Vulnerability Indicators .....</b>	<b>75</b>
	<b>Appendix D: Other Identified Datasets .....</b>	<b>80</b>
	<b>Appendix E: List of Databases Used and Brief Descriptions .....</b>	<b>82</b>
	<b>Appendix F: Additional Candidate Indicators Suggested by Experts .....</b>	<b>98</b>
	<b>Appendix G: Summary 48 Vulnerability Indicators .....</b>	<b>101</b>
	<b>Appendix H: Climate and Extreme Weather Vulnerability Indicators Identified by Web and Literature Search .....</b>	<b>121</b>
	<b>Appendix I: Visual Analogue Scale Selection Online Survey Instrument .....</b>	<b>126</b>
	<b>Appendix J: Expert Elicitation Results; Indicator Evaluation .....</b>	<b>165</b>
	<b>Appendix K: Webinar Slides for the Visual Analogue Scale (VAS) Selection .....</b>	<b>168</b>
	<b>Appendix L: Radar Plots for the 22 Ports Studied .....</b>	<b>177</b>
	<b>Appendix M: Abbreviations and Acronyms .....</b>	<b>189</b>
	<b>Unit Conversion Factors .....</b>	<b>190</b>
	<b>Report Documentation Page</b>	

# Figures and Tables

## Figures

Figure 1. Ports are critical to the U.S. national economies, global trade, and national security. Photo: Port of Camden-Gloucester, N.J. (photo by Elizabeth L. Mclean, 2018). .....	5
Figure 2. The three components of vulnerability. ....	6
Figure 3. Exposure of ports relative to proximity of historical tropical storms. ....	7
Figure 4. Examples of high (left) and low (right) levels of port sensitivity relative to its infrastructure construction materials and age.....	7
Figure 5. Decision-makers use resources to plan for resilience.....	8
Figure 6. Research design with steps allocated into four chapters of this report. Chapter 2 focuses on the first three steps.....	12
Figure 7. The 22 medium-use (blue dots) and high-use (magenta dots) ports in the North Atlantic based on USACE CENAD data from 2015. ....	17
Figure 8. <i>Mind map</i> legend presenting each indicator hierarchically mapped to a component of vulnerability. The <i>Mind map</i> also listed a description, data source, and units for each indicator. ....	20
Figure 9. VAS slider for indicating expert-perceived correlation between a candidate indicator and each of the components of vulnerability.....	25
Figure 10. Count of respondents' self-identified affiliations. Total n = 64. ....	27
Figure 11. Candidate indicators of seaport vulnerability to climate and extreme weather, sorted by total median expert-perceived magnitude of correlation with each of the three components of vulnerability. Port-specific candidate indicators in bold. ....	29
Figure 12. Top-15 candidate indicators for exposure, in descending order of median expert-perceived magnitude of correlation with seaport exposure to climate and extreme weather impacts. Port-specific candidate indicators in bold. ....	30
Figure 13. Top-15 candidate indicators for sensitivity, sorted by median expert-perceived magnitude of correlation with seaport sensitivity to climate and extreme weather impacts. Port-specific candidate indicators in bold.....	31
Figure 14. Top-15 candidate indicators for adaptive capacity, sorted by median expert-perceived magnitude of correlation with seaport adaptive capacity to climate and extreme weather impacts. Port-specific candidate indicators in bold. Overall, experts found significantly lower correlation with adaptive capacity than with the other two components of vulnerability.....	32
Figure 15. Count of participating experts' affiliations. Note: only 42% of the 64 invited experts participated in the survey.....	40
Figure 16. Equal weighting scores in the AHP prior to the pairwise comparisons. Each column represents a level of the AHP, and each red rectangle indicates a node (for which a priority vector will be calculated).....	44
Figure 17. Pairwise comparisons of the three components of seaport vulnerability.....	45
Figure 18. Hotspots map presenting the vulnerability scores using three standard deviation classes. (Colors: green = low; yellow = medium; red = high vulnerability).....	54
Figure 19. Disaggregated substructure of the composite-index vulnerability scores of the three highest scoring ports. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half.....	56

Figure 20. Disaggregated substructure of the composite-index vulnerability scores of the three lowest scoring ports. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. ....	56
Figure B-1. <i>Mind map</i> of the components of vulnerability for seaports: Exposure. ....	72
Figure B-2. <i>Mind map</i> of the components of vulnerability for seaports: Sensitivity. ....	73
Figure B-3. <i>Mind map</i> of the components of extreme weather vulnerability for seaports: Adaptive Capacity. ....	74
Figure E-1. Examples of event types from NOAA storm event database. ....	82
Figure E-2. Comparison of 10- and 100-year exceedance from NOAA database. Probability levels: meters above mean MHHW by locality. ....	84
Figure E-3. Daily CO and NO <sub>2</sub> AQI Values in 2016. ....	89
Figure E-4. World Port Index entries query form. ....	94
Figure J-1. Federal expert-perceived correlations with the components of vulnerability. ....	165
Figure J-2. Academics expert-perceived correlations with the components of vulnerability. ....	165
Figure J-3. Consultants expert-perceived correlations with the components of vulnerability. ....	166
Figure J-4. Practitioners expert-perceived correlations with the components of vulnerability. ....	166
Figure J-5. Others expert-perceived correlations with the components of vulnerability. ....	167
Figure L-1. The disaggregated substructure of the composite-index vulnerability scores for the Port of Albany, NY. Indicators of <i>exposure</i> are on the left half of the plot, and indicators of <i>sensitivity</i> are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for the "Hundred Year High Water" scored higher than any other indicator, the second highest indicator being the "Environmental Index." ....	177
Figure L-2. The disaggregated substructure of the composite-index vulnerability scores for the Port of Baltimore, MD. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for the "Average Cost of Storm Events" and the "Social Vulnerability Score" scored higher than any other indicator. ....	178
Figure L-3. The disaggregated substructure of the composite-index vulnerability scores for the Port of Boston, MA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Number of Cyclones" and "Population inside Floodplain" scored higher than the indicator for "Number of Disasters." ....	178
Figure L-4. The disaggregated substructure of the composite-index vulnerability scores for the Port of Bridgeport, CT. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals very small differences underlying the port's vulnerability. Indicators for "Population Inside Floodplain" scored higher than other indicators, followed by "Environmental Index," "Number of Storm Events" and "Number of Disasters." ....	179
Figure L-5. The disaggregated substructure of the composite-index vulnerability scores for the Port of Camden-Gloucester, NJ. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population Change" and "Number of Storm Events" scored higher than the indicators for "Number of Cyclones" and "Hundred Year High Water." ....	179
Figure L-6. The disaggregated substructure of the composite-index vulnerability scores for the Port of Chester, PA. Indicators of exposure are on the left half of the plot, and	



- indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Number of Storms" and "Sea Level Trend" scored higher than other indicators..... 180
- Figure L-7. The disaggregated substructure of the composite-index vulnerability scores for the Port of Fall River, MA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population Inside Flood Plain" and "Number of Critical Habitat Areas" scored higher than "Sea Level Trends." ..... 180
- Figure L-8. The disaggregated substructure of the composite-index vulnerability scores for the Port of Hempstead, NY. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population inside Flood Plain," "Environmental Index - ESI" and "Hundred Year High Water" scored higher than the "Social Vulnerability Score." ..... 181
- Figure L-9. The disaggregated substructure of the composite-index vulnerability scores for the Port of Hopewell, VA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Projected Change in Number of Extremely Heavy Precipitation Events" and "Sea Level Trend" scored higher than "Number of Storm Events" or "Number of Disasters." ..... 181
- Figure L-10. The disaggregated substructure of the composite-index vulnerability scores for the Port of Marcus Hook, PA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Number of Storm Events" scored higher than most of other indicators and the "Environmental Index - ESI" scored the lowest. .... 182
- Figure L-11. The disaggregated substructure of the composite-index vulnerability scores for the Port of New Haven, CT. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Average Cost of Storm Events" scored higher than most of all the indicators, the second highest one being "Number of Disasters." ..... 182
- Figure L-12. The disaggregated substructure of the composite-index vulnerability scores for the Port of New York and New Jersey, NY and NJ. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicator for the "Social Vulnerability" scored higher than the indicator for "Number of Storm Events." ..... 183
- Figure L-13. The disaggregated substructure of the composite-index vulnerability scores for the Port of Paulsboro, PA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population Change" scored high, while the "Social Vulnerability Score", the "Number of Critical Habitat Areas" and the "Projected Change in Number of Extremely Heavy Precipitation Events" scored the lowest. .... 183
- Figure L-14. The disaggregated substructure of the composite-index vulnerability scores for the Port of Penn Manor, PA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Most indicators scored low with the "Social Vulnerability Score" and the "Environmental Index - ESI" indicators scoring the lowest. .... 184
- Figure L-15. The disaggregated substructure of the composite-index vulnerability scores for the Port of Philadelphia, PA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals

differences underlying the port's vulnerability. Indicators for "Projected Change in Number of Extremely Heavy Precipitation Events" and the "Social Vulnerability" scored higher than the indicators for "Environmental Index" and "Population Inside Floodplain." ..... 184

Figure L-16. The disaggregated substructure of the composite-index vulnerability scores for the Port of Portland, ME. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Number of Disasters" and "Projected Change in Number of Extremely Heavy Precipitation Events" scored higher than the indicator for "Sea Level Trend." ..... 185

Figure L-17. The disaggregated substructure of the composite-index vulnerability scores for the port of Port Jefferson, NY. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. The indicator for "Number of Storm Events" scored higher than the indicators for "Social Vulnerability Score" and "Population inside Floodplain." ..... 185

Figure L-18. The disaggregated substructure of the composite-index vulnerability scores for the Port of Portsmouth, NH. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population Inside Floodplain" and the "Environmental Index - ESI" scored higher than the indicators for "Sea level Trend" and the "Social Vulnerability Score." ..... 186

Figure L-19. The disaggregated substructure of the composite-index vulnerability scores for the Port of Providence Port, RI. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals only slight differences underlying the port's vulnerability. Indicator for "Number of Critical Habitat Areas" scored higher than the indicator for the "Number of Storm Events." ..... 186

Figure L-20. The disaggregated substructure of the composite-index vulnerability scores for the Port of Searsport, ME. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population Change," "Number of Critical Habitat Areas" and the "Environmental Index - ESI" scored higher than the indicator for the "Number of Storm Events." ..... 187

Figure L-21. The disaggregated substructure of the composite-index vulnerability scores for the Port of Virginia, VA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals only slight differences underlying the port's vulnerability. Indicators for "Number of Cyclones" and "Population Inside Floodplain" scored higher than the indicators for the "Number of Disasters." ..... 187

Figure L-22. The disaggregated substructure of the composite-index vulnerability scores for the Port of Wilmington, DE. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Projected Change in Number of Extremely Heavy Precipitation Events" and "Number of Storm Events" scored higher than the indicator for the "Number of Disasters." ..... 188

## Tables

Table 1. Nine high-use ports (> 10 million tons, dark blue) and 13 medium-use ports (1 to 10 million tons, light blue) in the North Atlantic Region, 2015.....16

Table 2. Thirty-four candidate indicators selected via <i>Mind mapping</i> exercise for inclusion in the VAS survey, with each indicator's description, units, and data source. Port-specific candidate indicators in bold. ....	21
Table 3. Expert-suggested candidate indicators of seaport vulnerability to climate and extreme weather impacts. While these suggested candidate indicators lacked the readily available data required to be included in the VAS survey, they may hold promise for further development provided data can be synthesized or compiled from identifiable sources. ....	34
Table 4. Top-6 indicators for seaport exposure as identified by experts in the VAS survey. ....	41
Table 5. Top-6 indicators of seaport sensitivity as identified by experts in the VAS survey. ....	42
Table 6. Results of AHP consolidated group preferences for the relative importance of the components of seaport climate and extreme weather vulnerability.....	47
Table 7. Consolidated group preferences for the relative importance of indicators of seaport <i>exposure</i> to climate and weather extremes.....	48
Table 8. Consolidated group preferences for the relative importance of indicators of seaport <i>sensitivity</i> to climate and weather extremes.....	48
Table 9. Model-generated ranking of USACE CENAD ports by vulnerability to climate and extreme weather events. A score of 1 indicates most vulnerable, and -1 indicates least vulnerable. Note that here, vulnerability includes exposure and sensitivity, but not adaptive capacity. ....	53
Table 10. Port experts' consolidated subjective ranking of the top-10 USACE CENAD ports most vulnerable to climate and extreme weather (from McIntosh 2018). ....	55
Table C-1. Twenty extreme weather vulnerability indicator database sources, time range for the data, 48 numbered candidate indicators and its corresponding unit of measurement. A full list of all the identified databases and indicators are presented in <b>URI – Digital Commons</b> . ....	75
Table D-1. List of datasets that contain potential candidate indicators for vulnerability, but the datasets did not contain information for at least 12 of the 22 ports in this pilot study. They are included here to note that they were considered for this study, but rejected for the pilot. The datasets are presented with their source, time range for which data are available, the candidate indicator(s), and the units in which these are recorded. ....	80
Table F-1. Expert-suggested candidate indicators of seaport vulnerability to climate and extreme weather impacts. ....	98
Table F-2. Climate and extreme weather candidate vulnerability indicators, and their units, for which there was no clear database. ....	99
Table H-1. Initial list of 108 potential vulnerability indicators sorted by categories and subcategories. Coded on the right columns in function of the data availability to compare the 22 seaports in the study: (I) Sufficient Data: included in <i>Mind map</i> , (J) Selected via <i>Mind map</i> : included in VAS survey, and (K) Selected via VAS survey: included in Analytic hierarchy process (AHP) (see <b>URI – Digital Commons</b> ). ....	122

## Preface

This study was conducted for the U.S. Army Corps of Engineers (USACE), Navigation Systems (NavSys) Research Program. NavSys is administered at the U.S. Army Engineer Research and Development Center (ERDC), Coastal and Hydraulics Laboratory (CHL), under the USACE Navigation Systems Research and Development Program. The Program Manager of the NavSys Program was Mr. Charles E. Wiggins. This contract report was prepared by an interdisciplinary team at the University of Rhode Island, Kingston, RI, at the direction of Dr. Julie Rosati and Ms. Katherine Chambers at ERDC-CHL, Vicksburg, MS, and was funded by the Broad Agency Announcement Category CHL-11: Coastal Inlets and Navigation Channels. A full proposal was submitted to the ERDC CHL, Vicksburg, MS, through the Vicksburg Consolidated Contracting Office. This work was performed under Work Unit 33143; Project W912HZ-16-C-0019.

At the time of publication of this report, Mr. Jeffrey R. Eckstein was the Deputy Director of CHL, and Dr. Ty V. Wamsley was the Director.

COL Teresa A. Schlosser was the Commander of ERDC, and the Director was Dr. David W. Pittman.

## Executive Summary

The third U.S. National Climate Assessment indicates that seaport infrastructure is being damaged by sea level rise, heavy downpours, and extreme heat, and research suggests damage rates will continue to increase (Melillo et al. 2014). National and global economies depend on ports as over 90% of global trade is transported by sea (IMO 2012). Because climate and extreme weather affect most coastal infrastructure in the United States (IPCC 2013), it is important that knowledge of the regional distribution of vulnerability to climate and extreme weather inform transportation resilience and climate-adaptation planning.

This work is part of the U.S. Army Corps of Engineers (USACE) Project W912HZ-16-C-0019 entitled “Measuring Climate and Extreme Weather Vulnerability to Inform Resilience.” This report captures the first of a two-part study. In this first part, experts ranked higher the use of *exposure* and *sensitivity* indicators as measures of ports vulnerability. The second part of the study (McLean and Becker [2019], *Measuring Climate and Extreme Weather Vulnerability to Inform Resilience: Report 2: Port Decision Makers’ Barriers to Climate and Extreme Weather Adaptation*) focuses on *adaptive capacity* – the third component of vulnerability—and in particular on barriers to adaptation.

This project develops and pilots a methodology to measure climate and extreme weather vulnerability for North Atlantic Medium- and High-Use seaports by aggregating weighted indicators into composite indices. The approach developed by the University of Rhode Island with the support of the U.S. Army Engineer Research and the Development Center at the U.S. Army Corps of Engineers (USACE), integrates multiple vulnerability indicators. The composite indices resulted from a process that first identified candidate indicators from open-data sources, used experts’ evaluation of the candidate indicators, and weighted a selection of the highest ranking indicators.

The vulnerability indicators identified from open-data sources were sought for their potential to represent one of the three components of vulnerability outlined by the Intergovernmental Panel on Climate Change (IPCC): exposure, sensitivity, and adaptive capacity (IPCC 2012). To help ensure scalability, the project relied on open-data sources rather than creating bespoke datasets or obtaining proprietary data.

Based on the availability of open-data sources, this study developed an Indicator-Based Vulnerability Assessment (IBVA) methodology; the generated indices of seaport relative vulnerability to climate and extreme weather can advance the goals of the Marine Transportation System of the USACE by informing efforts and plans to prioritize and allocate limited resources to increase the climate resilience of seaports.

This report outlines the process of identification of candidate indicators for describing seaport vulnerability, the subsequent narrowing down to a manageable set, and the process of weighting and ranking indicators applied to a sample of ports. Of the 108 initially identified candidate indicators, 48 were supported by sufficient data for the selected 22 ports within the USACE North Atlantic Division geographic boundary. Through an expert elicitation process, experts ranked each indicator's correlation with the components of vulnerability (i.e., exposure, sensitivity, and adaptive capacity); indicators that did not have a high perceived correlation with the components of vulnerability were removed at this stage. This left 34 candidate indicators, of which the top-12 ranking indicators were weighted by experts in a final step via an Analytic Hierarchy Process (AHP).

The AHP resulted in relatively low levels of perceived correlation with adaptive capacity, compared to that for exposure and sensitivity. Therefore, the resulting seaport composite indices of vulnerability do not include indicators for adaptive capacity. Regional distribution of port vulnerability was measured with the composite indices of seaport exposure and sensitivity to climate and extreme weather resulting from aggregating the selected weighted indicators. The results of the IBVA methodology were validated by comparison to a subjective expert-ranking of ports by perceived vulnerability to climate and extreme weather. The AHP-generated ranking matched three of the top-4 most vulnerable ports as assessed subjectively by port experts showing strong promise as a methodological approach for measuring seaport vulnerability to climate and extreme weather events.

In conclusion, a new methodology to measure relative vulnerability to climate and extreme weather can advance the goals of the USACE by informing efforts and plans to prioritize and allocate limited resources to increase the climate resilience of seaports. Results of the research reported here suggest that while indicator-based methods show promise for

differentiating outlier ports among a sample in terms of climate vulnerability, challenges remain. For instance, adaptive capacity indicators lacked expert-perceived correlation with the open-data indicators identified, suggesting that improvements in the standardized reporting and sharing of port data or identifying other less quantitative means of assessing adaptive capacity may be warranted.

Results of this research point to several next steps needed to enhance the ability to compare and assess seaport climate vulnerability. Researchers recommend that future efforts focus on the development of methods to comparatively measure ports' adaptive capacity. Port experts weight adaptive capacity high in importance with respect to seaport climate vulnerability, yet adaptive capacity lacks expert-supported representation in the available data. Because results of the Visual Analogue Survey indicate that port-specific data are preferred by experts for representing adaptive capacity, researchers recommend that non-open (i.e., proprietary) port-specific data be explored for this purpose where possible. Additionally, researchers recommend that next steps involve the investigation of what types of bespoke data (e.g., Geographic Information System analysis of port elevation or proprietary non-open-data sources) might be synthesized into new, additional, or supplementary indicators.

# 1 Introduction<sup>1</sup>

At a national and regional scale, understanding how climate and storm events at maritime freight nodes (i.e., coastal ports) can help decision-makers evaluate how port-related investments impact the greater economy, the ecosystems in which ports reside (NRC 2009), and the level of resilience inherent to a port system. This understanding can lead to better decisions to increase resilience and coastal protection.

The vulnerability of seaports to climate and extreme weather can be measured in different ways; some studies have focused on the assessment of *exposure* only (Hanson et al. 2010; Nicholls et al. 2008); others have assessed port vulnerability at the single-port scale (NOAA 2015; Sempier et al. 2010; Morris and Sempier 2016); others have enlisted indicators as measures of relative port-performance. However, difficulty remains for describing the distribution of relative port climate vulnerability across multiple ports in a region. Climate and extreme weather are already affecting coastal infrastructure in the United States (Melillo et al. 2014). The threats include sea level rise, heavy downpours, and extreme heat. Impacts are expected to worsen over time; thus, the regional distribution of relative vulnerability of seaports in the North Atlantic to these impacts can assist planning priorities toward more resilient marine transportation.

When comparing vulnerabilities of multiple disparate systems, Indicator-Based Vulnerability Assessment (IBVA) methods can (1) provide a (semi) objective measure based on an aggregate of experts' opinions of an indicator's value, which is then applied to a group of ports, as opposed to an individual person guessing about the vulnerability of any one particular port; (2) allow measurable comparison that can be applied to other ports or used to evaluate level of

**How sufficient is the current state of data reporting for and about the seaport sector to develop expert-supported vulnerability indicators for a regional sample of ports?**

---

<sup>1</sup> Portions of this chapter reproduced from Duncan McIntosh, R. Duncan, and A. Becker. 2017. "Seaport Climate Vulnerability Assessment at the Multi-port Scale: A Review of Approaches." *Resilience and Risk: Methods and Application in Environment, Cyber and Social Domains*, edited by I. Linkov and J. M. Palma-Oliveira, 205-224. Springer Netherlands, Dordrecht.



vulnerability over time; and (3) allow investigations of the components and determinants of vulnerability levels. These standardized metrics allow for high-level analysis to identify areas or systems of concern. To advance IBVA for the seaport sector, this study investigated the suitability of publicly available open-data sources, generally collected for other purposes, to serve as indicators of climate and extreme-weather vulnerability for 22 major seaports in the Northeast United States, addressing the following question: Can the current state of data be utilized to develop expert-supported vulnerability indicators for a regional sample of ports?

This research contributes to a better understanding of the regional distribution of climate and extreme weather vulnerability across 22 North Atlantic ports to inform transportation resilience and climate and extreme weather adaptation planning. Results will serve as an entry point to inform the Marine Transportation System (MTS) decision-makers in the U.S. Army Corps of Engineers (USACE) and other agencies about the nature of seaport vulnerabilities to climate and extreme weather, the components and determinants of those vulnerabilities, the mechanisms through which a port is vulnerable, and the suitability of available data to serve as high-level indicators of seaport climate and extreme weather vulnerability.

Although this report focuses specifically on ports, these ports form part of a larger multi-modal network (i.e., the MTS). This approach considers the port as a *system* composed of on-site port infrastructure and equipment, water side components (approach channels), hinterland road and rail connections, as well as the surrounding natural environment and its local communities.

## **1.1 Report organization and research design**

This contract report is organized into six chapters.

Chapter 1 provides background, terminology, and a description of the research design for the development of the composite indices of seaport vulnerability.

Chapter 2 describes the process of identifying and refining a set of candidate indicators from open-data sources. The search for candidate indicators was driven by the definition of climate vulnerability as defined by the Intergovernmental Panel for Climate Change (IPCC). *Indicators* are

measurable, observable quantities that serve as proxies for an aspect of a system that cannot itself be directly, or precisely, measured (Gallopin 1997; Hinkel 2011). Indicators were identified by reviewing the Climate Change Vulnerability Assessment (CCVA) and seaport studies literature. Indicators were sought for their potential to represent one of the three components of vulnerability outlined by the IPCC: *exposure*, *sensitivity*, and *adaptive capacity* (IPCC 2012). From the initial literature search, 108 candidate indicators were identified within 20 open-source databases (hosted in seven federal agencies and one higher education institution webpage). Of these, 48 candidate indicators were found to contain data for the USACE North Atlantic Division (CENAD) sample of ports. These 48 candidate indicators were then presented to members of the U.S. Committee for Marine Transportation System, Resilience Integrated Action Team (RIAT). The MTS RIAT was established to focus on cross-federal agency knowledge co-production and governance to incorporate the concepts of resilience into the operation and management of the U.S. MTS (Touzinsky et al. 2018). Using a *Mind map*®, an organized diagram that allows the visualization of ideas (Mindmap.com 2017), the RIAT could visualize each candidate indicator hierarchically linked to the components of climate vulnerability. The RIAT experts helped the researcher team eliminate candidate indicators with low perceived correlation with the components of climate vulnerability for seaports. Thirty-four indicators were selected via the *Mind mapping*® exercise with the RIAT team of experts.

Chapter 3 describes the process of evaluating the set of 34 candidate indicators via a Visual Analogue Scale (VAS) survey where experts evaluated each indicator for perceived correlation with each of the three components of vulnerability, as mentioned above. This chapter presents a measure of expert-perceived correlation with the components of seaport climate vulnerability for each of the 34 candidate indicators.

Chapter 4 describes the application of the expert Analytic Hierarchy Process (AHP) to develop weights for the top-scoring vulnerability indicators as evaluated via the VAS survey described in Chapter 3. Because the port expert respondents found stronger correlation between candidate indicators for the exposure and sensitivity vulnerability components of a port than for indicators for the adaptive capacity, the AHP exercise did not include this last component.

Chapter 5 discusses how the weighted indicators were aggregated to generate a prototype composite index of seaport exposure and sensitivity to climate and extreme weather for the 22 ports in this study. From the initial assessment, the results were validated by comparing the rank order to a subjective expert-ranking of ports based on perceived vulnerability to climate and extreme weather. The AHP-generated ranking matched three of the top-4 most vulnerable ports as assessed subjectively by port experts.

Chapter 6 summarizes the conclusion from this study, which found that the development of weighted algorithms and composite indices, based on open-data, for seaport relative vulnerability to climate and extreme weather can advance the goals of the Marine Transportation System (MTS) of the USACE by informing efforts and plans to prioritize and allocate limited resources to increase the climate-resilient seaports.

## **1.2 Background**

### **1.2.1 Vulnerability of seaports<sup>1</sup>**

The primary function of a port is the transfer of cargo and/or passengers between a waterway and the shore (Talley 2009), but today's ports are more than simply a system of channels, wharves, and multi-modal connections. Ports link international supply-chains and are critical to the global economy and trading system (Figure 1). At the same time, many U.S. ports are highly vulnerable to a range of climate-related impacts, including temporary and permanent flooding arising from sea level rise, high winds, and storm surges (Hanson et al. 2010; Asariotis et al. 2017). Service disruptions alone can cause total economic losses in the billions of dollars (Haveman and Shatz 2006; Lloyds 2017) and can have second-order consequences, not only for the regional economy and the quality of life of those who depend on the port's functionality but also for the operation of supply chains (Figure 1).

---

<sup>1</sup>Portions of this chapter reproduced from Duncan McIntosh, R. Duncan, and A. Becker. 2017. "Seaport Climate Vulnerability Assessment at the Multi-port Scale: A Review of Approaches." *Resilience and Risk: Methods and Application in Environment, Cyber and Social Domains*, edited by I. Linkov and J. M. Palma-Oliveira, 205-224. Springer Netherlands, Dordrecht.

Figure 1. Ports are critical to the U.S. national economies, global trade, and national security.  
Photo: Port of Camden-Gloucester, N.J. (photo by Elizabeth L. Mclean, 2018).



Seaports represent spatially defined, large-scale, coast-dependent infrastructure with high exposure to projected impacts of global climate change and extreme weather impacts (Becker et al. 2013; Hanson et al. 2010; Melillo et al. 2014). Since 90% of global trade is carried by sea (IMO 2012), a disruption to port activities can interrupt supply chains and have far-reaching consequences (Becker et al. 2011; Becker et al. 2013; IPCC 2014a).

Among climate change vulnerability, resilience, and risk assessment methods applied to seaports, most efforts to date have been limited in scope to exposure-only assessments (Hanson et al. 2010; Nicholls et al. 2008; Klein et al. 2003), limited in scale to a single port (either as case studies (Koppe 2012; Cox et al. 2013; USDOT 2014; Messner et al. 2013; Chhetri et al. 2014; Stenek et al. 2011; Peris-Mora et al. 2005) or as self-assessment tools (Sempier et al. 2010; Morris and Sempier 2016; Roos and Kliemann Neto 2017; NOAA 2015).

The stakeholders who depend upon the port functionality are diverse, as ports serve as profit centers for a variety of businesses, including shippers, shipping agents, energy companies, importers and exporters, and port authorities. They facilitate the transport of energy resources, building materials, finished products, and chemicals. Ports also share ecologically sensitive coastlines with other stakeholders, such as commercial and recreational users. Ports may also be considered a cultural element,


embedded within and held accountable for the goals of a larger society (Burroughs 2005).

### 1.2.2 Terminology

In port's IBVA, *indicators* are measurable, observable quantities that serve as proxies for an aspect of a system that cannot itself be directly, adequately measured (Gallopín 1997; Hinkel 2011). Indicator-based assessment methods are generally applied to assess or measure features of a system that are described by theoretical concepts. Directly immeasurable, concepts such as resilience and vulnerability are instead made operational by mapping them to functions of observable variables called indicators (McIntosh 2018).


*Vulnerability* is defined as a function of the character, magnitude, and rate of climate and extreme weather change and variation to which a system is exposed, its sensitivity, and its adaptive capacity (IPCC 2001) (Figure 2).

Figure 2. The three components of vulnerability.

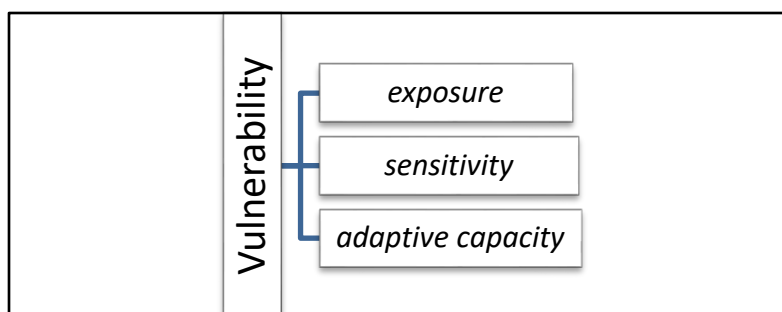


*Exposure:* The presence of people, livelihoods, species or ecosystems, environmental functions, services, and resources, infrastructure, or economic, social, or cultural assets in places and settings that could be adversely affected (IPCC 2014a). For ports, high exposure to climate and extreme weather events would be one that, for example, when the port is in an area prone to hurricanes or with a higher than average rate of sea level change. For example, U.S. East Coast ports are thought to have higher exposure to tropical storms than U.S. West Coast ports (Figure 3) whereas West Coast ports have higher exposure to earthquakes.

Figure 3. Exposure of ports relative to proximity of historical tropical storms.

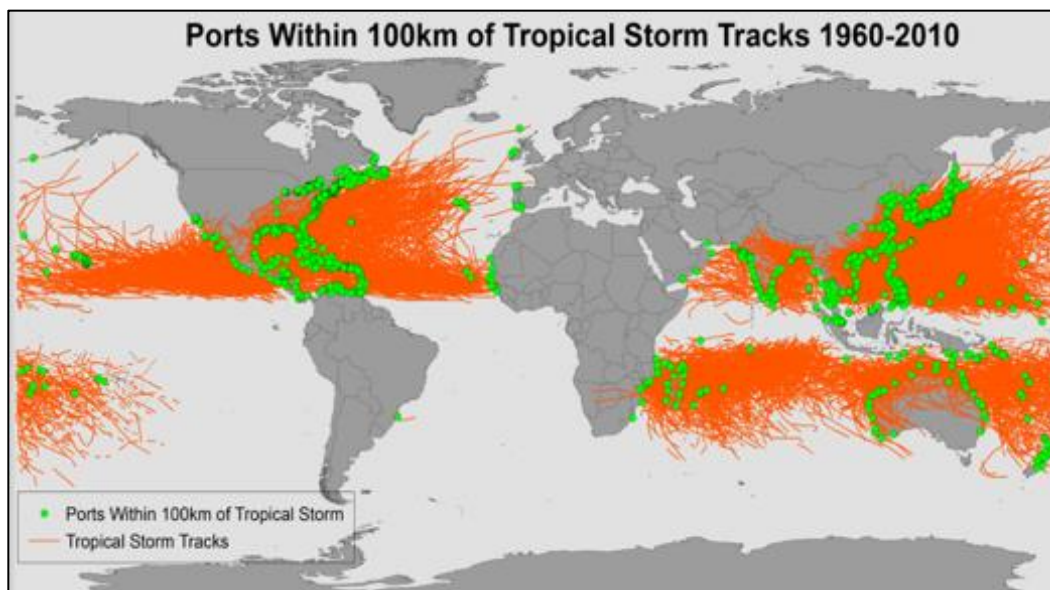

*Sensitivity:* The degree to which a system is affected, either adversely or beneficially, by climate-related stimuli (IPCC 2001). An example of a port structure with a high level of sensitivity to climate and extreme weather events would be an old wooden pier built over a century ago and in poor repair. This pier would be more susceptible to damage from a future storm event. A low level of sensitivity would be a newly constructed cement pier built to today's design standards (Figure 4). Note that in this example, the exposure for both structures could be the same, but due to its higher sensitivity, the wooden pier would be more vulnerable.

Figure 4. Examples of high (left) and low (right) levels of port sensitivity relative to its infrastructure construction materials and age.

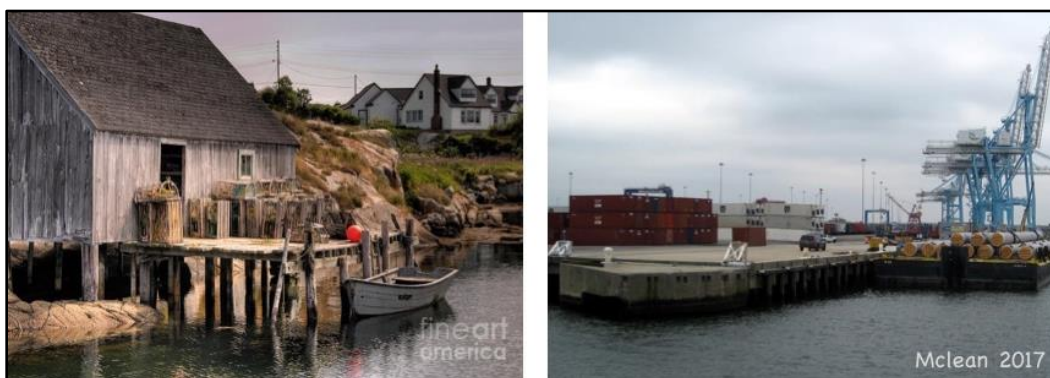

*Adaptive capacity:* The ability of systems, institutions, humans and other organisms to adjust to potential damage, to take advantage of opportunities, or to respond to consequences (IPCC 2014a). For ports,

higher adaptive capacity could be represented by a higher level of resources available to invest in resilience (Figure 5), or a port with a robust resilience plan and a staff position dedicated to resilience might be considered to have a higher adaptive capacity. A port that is struggling to make a profit with short planning horizons might be thought of as having a lower adaptive capacity.

Figure 5. Decision-makers use resources to plan for resilience.



**Risk:** A measure of the potential for consequences where something of value is at stake and where the outcome is uncertain (IPCC 2014b). Risk can be quantitatively modeled as  $Risk = p(L)$ , where  $L$  is potential loss and  $p$  the probability of occurrence. However, both can be speculative and difficult to measure in the climate-risk context. Risk, in the context of climate change, is often defined similarly to vulnerability (Preston 2012; IPCC 2014a), but — as seen in the equation — with the added component of *probability*, thus making vulnerability a component of *risk*. From the risk analysis perspective, the indicators developed by this research focus on measuring the potential loss “ $L$ ” rather than the probability “ $p$ .” From the CCVA perspective, indicators are developed to measure vulnerability based on the three components, but not in relation to likelihood nor probability of occurrence.

**Resilience:** As defined by the IPCC, resilience is “the capacity of social, economic and environmental systems to cope with a hazardous event or



trend or disturbance, responding or reorganizing in ways that maintain their essential function” (IPCC 2014b). More recently, Schultz and Smith (2016) defined it as “the ability to anticipate, prepare for, and adapt to changing conditions and withstand, respond to, and recover rapidly from disruptions.” Most working definitions of resilience involve a process that begins before a hazardous impact occurs, including temporal periods for during and after the impact. While this research will further the development of indicators of seaport climate and extreme weather vulnerability, the objective is that by increasing the understanding of the regional distribution of seaport climate and extreme weather vulnerability, the overall resilience of the MTS<sup>1</sup> can be enhanced.

**The focus on individual port scale assessments presents a challenge for how to assess the regional distribution of climate and extreme weather vulnerabilities across multiple ports.**

Other terminology used in this study is defined in Appendix A.

### **1.2.3 Vulnerability assessments**

The IPCC describes the vulnerability and risk assessment as “the first step for risk reduction, prevention, as well as climate adaptation in the context of extremes.” (IPCC 2012). Similarly, the U.S. National Climate Assessment considers vulnerability and risk assessment as an “especially important” area in consideration of adaptation strategies in the transportation sector (Melillo et al. 2014).

Port decision-makers, including port managers and federal agencies, manage risks for a diverse array of stakeholders, not only in ports but also in private firms and areas of public interest. In the context of climate change and extreme risks, port managers may consider the uninterrupted operations of their port the number-one priority. However, at the multi-port (regional or national) scale, policy-makers will need to prioritize competing port adaptation needs to maximize the efficiency of limited physical and financial resources, and to address the resilience of the marine transportation system as a whole.

---

<sup>1</sup> The MTS consists of waterways, ports, and inter-modal land-side connections that allow the various modes of transportation to move people and goods to, from, and on the water MARAD. 2016. *Marine Transportation System (MTS)* [Online]. Washington, DC: Maritime Administration. Available at <https://www.marad.dot.gov/ports/marine-transportation-system-mts/>. Accessed 5/25/2016..



### 1.2.4 Single vs. multi-seaport assessments

In 2010, Hanson et al. (2010) made positive progress in the area of climate change vulnerability assessment by looking at the exposure of 136 international port cities with over one million inhabitants exposed to flooding in 2005. Their case study considered exposure for present day 100-year floods including six additional predicted future flooding scenarios. Using semi-empirical values of the number of people and 2005-dollar value of assets, researchers were able to calculate exposure. However, producing more concrete calculations was difficult due to scale.

This is one of many examples of seaport vulnerability and risk assessment methods that are limited to exposure-only assessments (Hanson et al. 2010; Nicholls et al. 2008), limited in scale to a single port, presented as case studies (Koppe et al. 2012; Cox et al. 2013; USDOT 2014; Messner et al. 2013; Chhetri et al. 2014), or presented as self-assessment tools (NOAA OCM 2015; Sempier et al. 2010; Morris and Sempier 2016). While single-port scale CCVA inform decisions within the domain of one port (e.g., Which specific adaptations are recommended for my port?), a CCVA approach that objectively compares the relative vulnerabilities of multiple ports in a region could support Climate Impact Adaptation and Vulnerability decisions at the multi-port scale (e.g., Which ports in a region are the *most* vulnerable and urgently in need of adaptation?). The focus on individual port scale assessments presents a challenge for how to assess the regional distribution of climate and extreme weather vulnerabilities across multiple ports.

While self-assessment methods can yield valuable stakeholder insight into the state of an individual seaport, they are context-specific and therefore, not readily applicable to comparative analyses across seaports. Mixed quantitative and qualitative methods allow for a deeper understanding of individuals' or groups' perceptions of vulnerability.

At the multi-port scale, an evaluation of *relative* climate and extreme weather-vulnerabilities or the distribution of those vulnerabilities among a regional or national set of ports requires standard measures (i.e., indicators or metrics). As an example, the Port Performance Indicators: Selection and Measurement program aims to develop indicators that allow the port industry to measure, assess, and communicate the impact of the European port system on society, the environment, and the economy (ESPO 2010).

Resiliency of systems are routinely measured at the engineering level. These efforts are challenged by difficulty of agreement on a quantifiable measure and the integration of uncertainty (Yodo and Wang 2016). Concepts of resilience and risk can be mapped using functions of observable variables called indicators. Given that indicators serve as proxies (Gallopín 1997; Hinkel 2011), indicator-based assessment methods are generally applied to assess or measure features of a system that are described by theoretical concepts.

To measure relative vulnerability across multiple ports, or to predict a port's climate and extreme weather resilience, port vulnerability indicators are considered. The indicator-based assessment process consists of two or sometimes three steps: (1) defining the response to be indicated, (2) selecting the indicators, and (3) aggregating the indicators (Hinkel 2011). Step three is sometimes omitted, but it is fundamental for generating a numerical *score* or creating a comparative index.

### **The Value of Seaport Climate and Extreme Weather Vulnerability Indicators**

On a national and regional scale, evaluation of port-related investment proposals for restoring ecosystems and sustaining navigation will require an understanding of how climate and storm events at maritime freight nodes (i.e., coastal ports) impact the greater economy and ecosystems in which ports reside (NRC 2009) and the level of resilience inherent to a port system. For comparative studies, the data used as indicators need to hold similar standards and scale. By identifying and refining a set of high-level vulnerability indicators of seaport climate and extreme weather vulnerability, the availability and suitability of data to differentiate ports' relative vulnerability within a region can be better understood.


The remainder of this report describes the methods developed and tested to identify, evaluate, and implement the vulnerability index approach.

## 2 Identification of Candidate Indicators of Seaport Vulnerability to Climate and Extreme Weather

### 2.1 Introduction

This Chapter 2 describes the method for identifying candidate indicators for seaport vulnerability (i.e., exposure, sensitivity, and adaptive capacity, Figure 6). It begins with a description of approaches to indicator-based assessment and applicability to the seaport sector. Next, it describes the method used to identify candidate indicators through a web and literature-based search and the verification of data availability for the studied ports. It then provides an overview of how experts participated in a *Mind mapping*® exercise (see Appendix B) to vet the candidate indicators and narrow the list to a size that could be evaluated through a VAS process in an online survey described in Chapter 3.

Figure 6. Research design with steps allocated into four chapters of this report. Chapter 2 focuses on the first three steps.

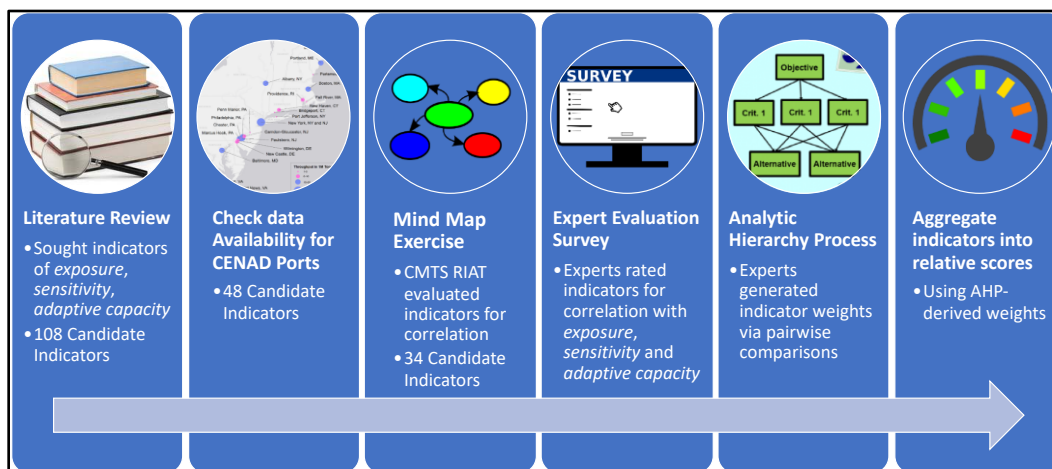

#### 2.1.1 Indicator-based assessments

The indicator-based assessment process (Hinkel 2011) consists of two or sometimes three steps: (1) defining the response to be indicated, (2) selecting the indicators, and (3) aggregating<sup>1</sup> the indicators. (Hinkel 2011) describes three kinds of arguments for developing vulnerability indicators and notes that development of indicators generally combines different

<sup>1</sup> This step is sometimes omitted but necessary to yield a heat map or create a comparative index.

types such as (1) deductive indicators that are based on existing theory, (2) inductive indicators that are based on data of both the indicating variables as well as observed harm, and (3) normative indicators that are based on stakeholder's value judgments.

Accordingly, the approach described in this work begins with the application of a deductive argument, meaning that the selection of vulnerability indicators is grounded in the framework established in the third assessment report of the Intergovernmental Panel on Climate Change (IPCC 2001). The IPCC report defined climate change vulnerability in terms of three components: exposure, sensitivity, and adaptive capacity. The expert-elicitation process can be described as a normative approach because it seeks experts' consensus based on the value judgments required to determine perceived correlation between the candidate indicators and the components of vulnerability initially identified.

### 2.1.2 Expert elicitation

Expert elicitation has become a common approach for the indicator development process, and examples include the “new indicators of vulnerability and adaptive capacity” (Adger et al. 2004), “determinants of vulnerability and adaptive capacity at the national level” (Brooks et al. 2005), climate change vulnerability for South Korea (Kim and Chung 2013), performance appraisal indicators for mobility of the service (Seijger et al. 2014) industries (Kuo and Chen 2008), and indicators for fisheries management (Rice and Rochet 2005) among others. Additionally, research indicates that involving stakeholders in the process of developing knowledge systems (White et al. 2010; Schroth et al. 2011) (i.e., decision support tools) can lead to improvements in their perceived credibility, salience, and legitimacy (Seijger et al. 2014; Akompab et al. 2012)

The IPCC considers indicators an important part of vulnerability and risk analysis and recommends that quantitative approaches be complemented with qualitative approaches to capture the full complexity of climate vulnerability in its different dimensions (environmental, social, economic)

**This investigation contributes to the ongoing work of developing climate change vulnerability assessment indicators by applying expert-elicitation methods to develop and evaluate a set of indicators for each of the three components of seaport climate vulnerability.**

(IPCC 2014a). This investigation contributes to the ongoing work of developing CCVA indicators by applying expert-elicitation methods to develop and evaluate a set of indicators for each of the three components of seaport climate vulnerability.

To date there have been relatively few examples of comparative CCVA for the seaport sector (McIntosh 2018). Most indicator-based assessments for ports have stopped short of a comparative CCVA<sup>1</sup> (e.g., the elevation-based exposure-only assessment of global port cities [Nicholls et al. 2008]) or have focused on assessing other concepts (e.g., which aimed to measure port performance [ESPO 2012]). While understanding how a port or a port-city's elevation affects its exposure to climate-impacts like sea level rise (SLR), it is only one piece of the puzzle that describes how a port is or is not vulnerable to climate and extreme weather. By assessing the sensitivity and adaptive capacity of a port along with its exposure to a wide array of impacts in addition to SLR, a more complete picture of the mechanisms and drivers of seaport climate vulnerability may be better understood.

As port decision-makers face climate and extreme weather impacts and make adaptation and vulnerability<sup>1</sup> decisions, CCVA support those decisions (IPCC 2014a). This process can generate dialog among stakeholders and practitioners on planning and implementation of needed adaptation measures. Such assessments can be made at the single-port scale, or at the multi-port scale, with each approach having benefits for different decision-makers.

## 2.2 Methodology

Rather than taking a purely theoretical approach to developing indicators (e.g., that used in the development of the Social Vulnerability Index [SoVI] [Cutter et al. 2003]), this work takes a stakeholder-driven approach to a vulnerability indicator development by including port experts in the selection, evaluation, and weighting of the indicators. According to previous works, stakeholder-driven approaches increase the creditability of the indicators as tools (Barnett et al. 2008; Sagar and Najam 1998). By including stakeholders in the design-stage of decision-support tools or boundary-object development, the stakeholders'

---

<sup>1</sup> CCVA decisions are choices, the results of which are expected to affect or be affected by the interactions of the changing climate with ecological, economic, and social systems.

perceptions of the credibility, salience, and legitimacy of the tool can be increased (White et al. 2010).

For evaluating candidate indicators of seaport vulnerability, this research took a holistic approach to vulnerability assessment by considering impacts that extend beyond the borders of the port property. To that end, this research, in the identification and evaluation of the candidate indicators, considered potential multimodal vulnerabilities at the port location as well as impacts to a port's surrounding community and economy (socio-economic systems) and ecological and environmental surroundings (environmental systems).

The selection and evaluation of indicators involved three steps, which will be described in the following sections:

- Step 1. Literature review to compile candidate indicators
- Step 2. Vetting for data availability
- Step 3. *Mind mapping*© exercise.

This research focuses on the 9 high-use and 13 medium-use ports (Table 1) found in the CENAD<sup>1</sup> as the sample population for which to develop indicators (Figure 7). The U.S. Army Engineer Research and Development Center has expressed an interest in piloting port resilience and vulnerability assessment methods with high-use ports<sup>2</sup> and by adding medium-use ports and restricting the selection to the Northeast region, researchers were able to create a manageable sample of 22 ports.

---

<sup>1</sup> The North Atlantic Division is one of nine USACE divisions and encompasses the U.S. Eastern Seaboard from Virginia to Maine (USACE 2019).


<sup>2</sup> Dr. Julie Rosati, U.S. Army Engineer Research and Development Center, Coastal and Hydraulics Laboratory, Personal communication, February 2015.

Table 1. Nine high-use ports (> 10 million tons, dark blue) and 13 medium-use ports (1 to 10 million tons, light blue) in the North Atlantic Region, 2015.

NO.	PORT NAME	STATE	TOTAL TONS
1	New York	NY and NJ	123,323,000
2	Norfolk Harbor	VA	48,893,600
3	Baltimore	MD	36,578,800
4	Philadelphia	PA	26,046,300
5	Paulsboro	NJ	19,122,100
6	Boston	MA	17,087,800
7	Portland	ME	12,039,600
8	Marcus Hook	PA	11,925,400
9	Albany	NY	11,021,200
10	New Haven	CT	8,350,900
11	Providence	RI	7,749,520
12	New Castle	DE	6,918,900
13	Wilmington	DE	6,146,100
14	Camden-Glaoucester	NJ	5,536,810
15	Portsmouth	NH	2,679,150
16	Penn Manor	PA	2,586,130
17	Bridgeport	CT	1,805,580
18	Searsport	ME	1,457,540
19	Port Jefferson	NY	1,437,880
20	Falls River	MA	1,366,630
21	Chester	PA	1,306,040
22	Hopewell	VA	1,027,150

Source: <http://www.navigationdatacenter.us/wcsc/portname15.html>

Figure 7. The 22 medium-use (blue dots) and high-use (magenta dots) ports in the North Atlantic based on USACE CENAD data from 2015.

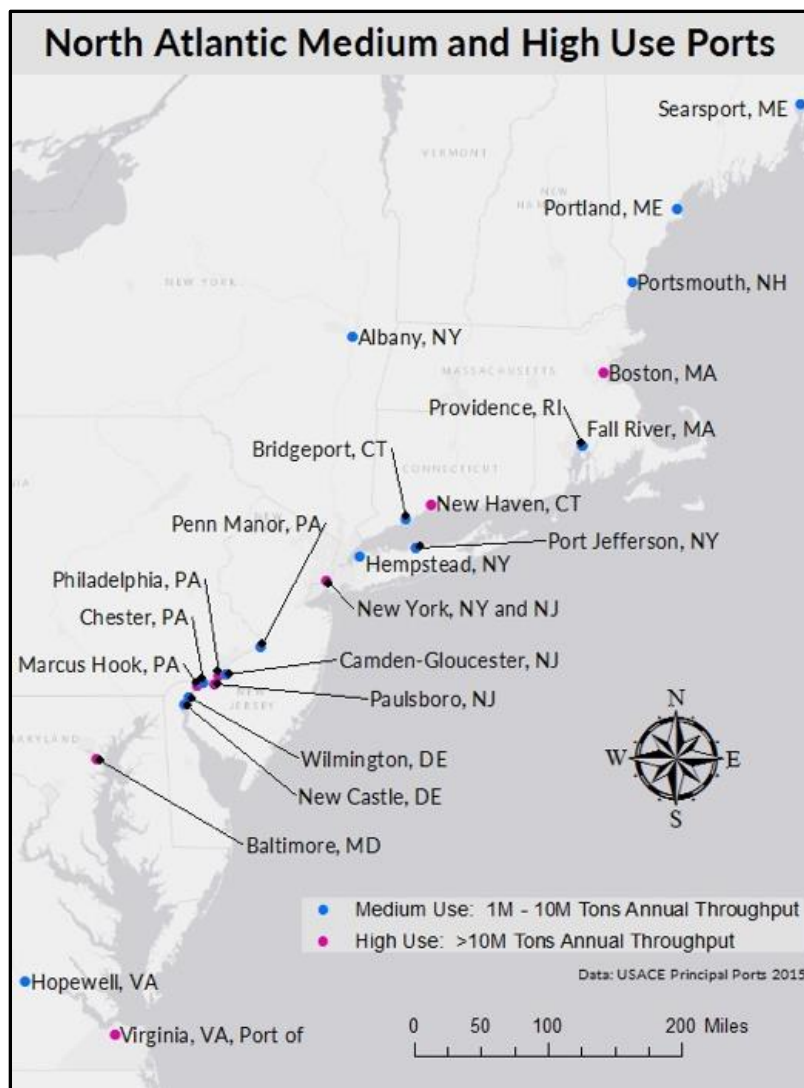

The proximity of these ports to the University of Rhode Island allowed the team to ground-truth some of the research through site visits and interviews. Results of these interviews will follow in a subsequent report. Though this assessment was tailored for the New England region, the framework was developed with the intent that it could be applicable (with modifications) to other regions.

### 2.2.1 Step 1: Literature review to compile candidate indicators

Candidate indicators of seaport climate and extreme weather vulnerability were first identified from an extensive literature review of the CCVA and seaport studies researched in the literature. Indicators were sought for



their potential to represent one of the three components of vulnerability: exposure, sensitivity, and adaptive capacity. These three components were considered in terms of weather extremes, variability, projected climate changes, and the impacts of these stressors on seaports and their associated socioeconomic and environmental systems.

The exposure component of vulnerability captures the geographic proximity of a port to projected climate and extreme weather impacts, while the sensitivity component captures the degree to which a port is affected by those impacts. Adaptive capacity indicators are not specific to individual climate impacts (USDOT 2014) but capture a port's ability to cope with and respond to stress by measuring redundancies within the port, duration of downtime, and ability to bounce back quickly. Other examples of candidate indicators for adaptive capacity include *port throughput value*, *budgets*, *planning processes*, and *resilience budgets*. The 108 candidate indicators are described in more detail in a spreadsheet linked through the University of Rhode Island Digital Commons online repository (for access, visit hyperlinked address at [URI - Digital Commons](#)). The 48 candidate indicators found to contain appropriate data for analysis of the North Atlantic ports in this study are further described in Appendix C of this report.

### **2.2.2 Step 2: Vetting for data availability**

Any candidate indicators identified in the literature review were vetted for data availability. Several criteria were necessary for data to qualify for use in this study. First, the indicators and their dataset needed to be available from open-data sources. Next, datasets needed to be represented across the sample set of ports. If a particular dataset was not available across at least 16 of 22 ports, it was left out of the analysis. New data were not created or collected for this research, although future studies could enhance this assessment through the addition of new data such as age of structures, slope and elevation, individual port plans, and individual port budgets. Collecting such data was outside the scope of the project and presents numerous questions. For example, to collect age of structures or conduct a ground elevation analysis, decisions would need to be made about what *is* and *is not* part of the port. Since this study considered the port to be a system, numerous terminals and facilities might be included in each port. An elevation analysis would need to determine the bounds for each of these facilities, as well as which should be considered part of the

port. Individual port plans or budgets would similarly need to be assessed in a way that could facilitate inter-port comparisons.

Once identified, candidate indicators were vetted for their data availability from open-data sources. Adopting open-data for indicator development increases transparency, facilitates reproducibility, and can enhance reliability when using standardized data sources (Janssen et al. 2012; CMTS 2015). Only those indicators with data available for at least 16 of the study's sample of 22 ports were retained for further study. The 108 candidate indicators of seaport climate-exposure, sensitivity, and adaptive capacity that were investigated during this first step, as well as each indicator's preliminary categorization, were presented in the University of Rhode Island's [URI - Digital Commons](#) and its open-data source are in Appendix C. Additionally, a summary and description of the open-data sources are also presented in Appendix D and Appendix E.

These candidate indicators include a mix of "place-based" indicators that measure vulnerability of place at the county scale, as seen in the "hazards-of-place" model of vulnerability (Cutter 1996b; Cutter et al. 2008; Cutter et al. 2010), e.g., *population inside floodplain*, and *port-specific* indicators that measure vulnerability via a characteristic of the port itself, e.g., *containership capacity*. For a comprehensive review of the data sources used, see the metadata spreadsheet in the [URI - Digital Commons](#). Of the 108 candidate indicators originally compiled, 48 (24 place-based and 24 port-specific) were found to have sufficient data available for the 22 sample ports.


### **2.2.3 Step 3: *Mind mapping*® exercise to refine the set of candidate indicators**

After compiling the 48 candidate indicators that were deemed to have sufficient data availability, researchers mapped them to the components of seaport climate vulnerability using the *Mind mapping*® software *FreeMind*<sup>1</sup>. On the *Mind maps*®, each of the 48 candidate indicators with available data was hierarchically mapped to one of the three components of vulnerability, and for each indicator, the research team provided its description, data source, and units (Figure 8).

---

<sup>1</sup> Muller, J., D. Polansky, P. Novak, C. Foltin, and D. Polivaev. 2013. *FreeMind – Free Mind Mapping and Knowledge Building Software*. [http://freemind.sourceforge.net/wiki/index.php/Main\\_Page](http://freemind.sourceforge.net/wiki/index.php/Main_Page)

Figure 8. *Mind map* legend presenting each indicator hierarchically mapped to a component of vulnerability. The *Mind map* also listed a description, data source, and units for each indicator.

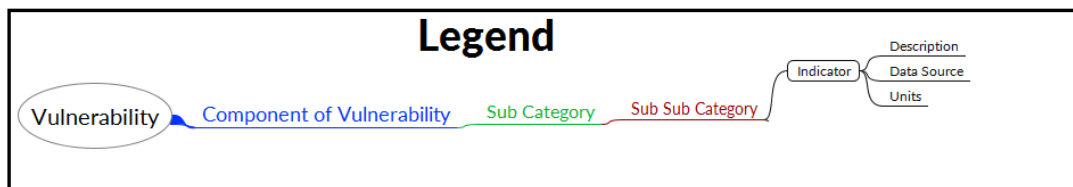

Researchers held a workshop on 9 November 2016<sup>1</sup> with nine members of the RIAT<sup>2</sup> of the United States Committee on the Marine Transportation System<sup>3</sup> (U.S. CMTS) in Washington, DC, to elicit MTS-experts' opinions on which of the candidate indicators to include in the VAS survey instrument. For each candidate indicator, experts denoted with a plus or a minus whether an increase in that indicator correlates to an increase or decrease in the component of vulnerability it was mapped to, or with a zero if no correlation could be determined. In addition to evaluating the 48 candidate indicators with sufficient data availability, participants brainstormed other potential data sources for those indicators without sufficient data and suggested additional indicators that may have been overlooked (Appendix F).

The *Mind mapping* exercise concluded with 14 candidate indicators marked as having no correlation to vulnerability, 25 marked as having positive correlation, and 9 as having negative correlations. Because of the *Mind mapping* exercise, 34 candidate indicators were selected to be evaluated in the next round, which consisted of a VAS expert survey (described in Chapter 3) distributed to a larger group. Of these 34 indicators, 14 were port-specific and 20 were place-based indicators. They are listed alphabetically, along with descriptions, units, and data sources in (Table 2). For a more comprehensive description of each of the 34 indicators see the summary compilation in [URI – Digital Commons](#).

<sup>1</sup> Workshop notes were submitted to USACE on 11/10/2016.

<sup>2</sup> The MTS RIAT was established to focus on cross-federal agency knowledge co-production and governance to incorporate the concepts of resilience into the operation and management of the U.S. MTS.

<sup>3</sup> The U.S. CMTS is a federal Cabinet-level, inter-departmental committee chaired by the Secretary of Transportation. The purpose of the CMTS is to create a partnership of federal departments and agencies with responsibility for the MTS.

**Table 2. Thirty-four candidate indicators selected via *Mind mapping* exercise for inclusion in the VAS survey, with each indicator's description, units, and data source. Port-specific candidate indicators in bold.**

Indicator	Description	Units	Data Source
Air.Pollution.Days	Number of Days with Air Quality Index value greater than 100 for the port city	Days	U.S. Environmental Protection Agency (EPA) Air Quality Report
Average.Cost.of.Hazmat.Incidents	Average cost per incident of total damage from the 10 most costly Hazardous Materials Incidents in the port city since 2007	\$	U.S. Department of Transportation (DOT) Pipeline and Hazardous Materials Safety Administration
Average.Cost.of.Storm.Events	Average cost of property damage from storm events in the port county since 1950 with property damage > \$1 Million	\$	National Oceanic and Atmospheric Administration (NOAA) Storm Events Database
Channel.Depth	The controlling depth of the principal or deepest channel at chart datum	A (over 76 feet [ft]) to Q (0 – 5 ft) in 5 ft increments	World Port Index (Pub 150)
Containership.Capacity	Container Vessel Capacity	calls x Dead Weight Total (DWT)	Marine Administration (MARAD): Vessel Calls at U.S. Ports by Vessel Type
Disaster.Housing.Assistance	The total disaster housing assistance of Presidential Disaster Declarations for the port county since 1953	Declarations	Federal Emergency Management Agency (FEMA): Disaster Declarations
Entrance.Restrictions	Presence or absence of entrance restrictions	Tide, Swell, Ice, Other	World Port Index (Pub 150)
Environmental.Index	Environmental Sensitivity Index (ESI) shoreline sensitivity to an oil spill for the most sensitive shoreline within the port	ESI Rank (1.00 - 10.83)	NOAA Office of Response and Restoration
Gas.Carrier.Capacity	Gas Carrier Capacity	calls x DWT	MARAD: Vessel Calls at U.S. Ports by Vessel Type
Harbor.Size	Harbor Size	Large, Medium, Small, Very-Small	World Port Index (Pub 150)
Hundred.Year.High.Water	1% annual exceedance probability high water level which corresponds to the level that would be exceeded one time per century, for the nearest NOAA tide station to the port	meters above mean higher high water (MHHW)	NOAA Tides and Currents: Extreme Water Levels

Indicator	Description	Units	Data Source
Hundred.Year.Low.Water	1% annual exceedance probability low water level for the nearest NOAA tide station to the port, which corresponds to the level that would be exceeded one time per century	meters below mean lower low level (MLLW)	NOAA Extreme Water Levels
Marine.Transportation.GDP	County Marine Transportation Gross Domestic Product (GDP)	\$	NOAA Office for Coastal Management
Marine.Transportation.Jobs	Number of Marine Transportation Jobs in the port county	number of jobs	NOAA Office for Coastal Management
Number.of.Critical.Habitat.Areas	Number of Critical Habitat Areas within 50 miles of the port	Areas	U.S. Fish and Wildlife Service
Number.of.Cyclones	Number of cyclones that have passed within 100 nautical miles (nm) of the port since 1842	Number of cyclones	NOAA Historical Hurricane Tracks Tool
Number.of.Disasters	Number of Presidential Disaster Declarations for the port county since 1953	Disaster Type	FEMA: Disaster Declarations
Number.of.Endangered.Species	Number of Threatened or Endangered Species found in port county	Species	U.S. Fish & Wildlife Service
Number.of.Hazmat.Incidents	Number of Hazardous Materials Incidents in port city since 2007	Number of Incidents	U.S. DOT Pipeline and Hazardous Materials Safety Administration
Number.of.Storm.Events	Number of storm events in port county w/ property damage > \$1M	events	NOAA Storm Events Database
Overhead.Limits	Presence or absence of overhead limitations	Y/N	World Port Index (Pub 150)
Percent.of.Bridges.Deficient	Percent of bridges in the port county that are structurally deficient or functionally obsolete	%	US DOT FHA National Bridge Inventory
Pier.Depth	The greatest depth at chart datum alongside the respective wharf/pier. If there is more than one wharf/pier, then the one which has greatest usable depth is shown.	A (over 76 ft) to Q (0 – 5 ft) in 5-foot increments	World Port Index (Pub 150)

Indicator	Description	Units	Data Source
Population.Change	Rate of population change (from 2000-2010) in the port county, expressed as a percent change	%	NOAA Office for Coastal Management
Population.Inside.Floodplain	Percent of the port county population living inside the FEMA Floodplain	%	NOAA Coastal County Snapshots
Projected.Change.in.Days.Above.Baseline.Extremely.Hot.Temperature	The percent change from observed baseline of the average number of days per year above baseline “Extremely Hot” temperature projected for the end-of-century, downscaled to 12 km resolution for the port location	%	U.S. DOT Coupled Model Inter-comparison Project (CMIP) Climate Data Processing Tool
Projected.Change.in.Number.of.Extremely.Heavy.Precipitation.Events	The percent change from observed baseline of the average number of “Extremely Heavy” Precipitation Events projected for the end-of-century, downscaled to 12 km resolution for the port location	%	U.S. DOT CMIP Climate Data Processing Tool
Sea.Level.Trend	Local Mean Sea Level Trend	millimeters per year (mm/yr)	NOAA Tides and Currents: Sea Level Trends
Shelter.Afforded	The shelter afforded from wind, sea, and swell, refers to the area where normal port operations are conducted, usually the wharf area.	Excellent (5), Good (4), Fair (3), Poor (2), None (1)	World Port Index (Pub 150)
SoVI.Social.Vulnerability.Score	Port County Social Vulnerability (SoVI) Score	score number	SoVI® Social Vulnerability Index
Tanker.Capacity	Tanker Capacity	calls x DWT	MARAD: Vessel Calls at U.S. Ports by Vessel Type
Tide.Range	Mean tide range at the port	feet	World Port Index (Pub 150)
Tonnage	Total Throughput	Tons	USACE Navigation Data Center (ports)
Vessel.Capacity	Vessel Capacity (vessels > 10k (DWT)	calls x DWT	MARAD: Vessel Calls at U.S. Ports by Vessel Type

## 2.3 Conclusion

A total of 108 candidate indicators were identified via the literature review; of these, 48 (24 place-based and 24 port-specific) had sufficient data for the 22 studied ports and were used in a *Mind mapping* exercise with the RIAT team. For summary information on these 48 indicators, please see Appendix G. Thirty-four candidate indicators were mapped and marked as having correlation to vulnerability, 25 marked as having positive correlation, and 9 candidate indicators marked as having negative correlation. The 34 resulting candidate indicators from the *Mind mapping* exercise were selected to be evaluated via the subsequent VAS expert survey: 14 of these were port-specific indicators and 20 were place-based indicators. A comprehensive list of all 108 indicators is available at [URI - Digital Commons](#) (see also Appendix H).

### 3 Expert Evaluation of Seaport Climate and Extreme Weather Vulnerability Indicators

#### 3.1 Introduction


To refine a set of high-level indicators of seaport climate and extreme weather vulnerability identified in Chapter 2, and to determine the suitability of available open-data to differentiate ports within a region in terms of relative climate vulnerabilities, researchers developed a VAS survey instrument for expert-evaluation of selected candidate indicators of seaport vulnerability to climate and extreme weather impacts for the 22 medium and high-use ports of the USACE CENAD. Chapter 3 provides an overview of this process and the method for further narrowing down the indicators through expert elicitation.



#### 3.2 Methodology

A VAS is an instrument that measures a characteristic or an attitude that is believed to range across a continuum of values and cannot easily be directly measured (Appendix I). A VAS is usually a horizontal line, 100 millimeters (mm) in length, anchored by word descriptors at each end, as illustrated in Figure 9. The respondent selects the point on the line that represents their perception of the question. The VAS score is determined by measuring in millimeters from the left-hand end of the line to the point that the respondent marks. As a continuous, or analogue scale, the VAS is differentiated from discrete scales such as Likert scale (Likert 1932) by the fact that a VAS contains a real distance measure, and as such, a wider range of statistical methods can be applied to the measurement.

Figure 9. VAS slider for indicating expert-perceived correlation between a candidate indicator and each of the components of vulnerability.

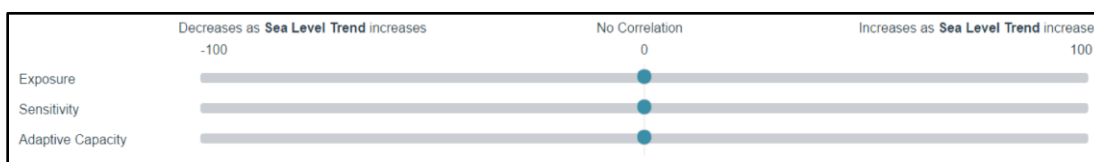



### 3.2.1 Selection of experts for Visual Analogue Scale (VAS) survey


Because expert elicitation relies on expert's knowledge rather than a statistical sample, the selection of qualified experts is considered one of most crucial steps in the process for insuring the internal validity of the research (Delbecq et al. 1975; Hasson et al. 2000; Keeney et al. 2006; Okoli and Pawlowski 2004). Candidates for the port expert group were selected according to recommended best practices in expert selection developed by Delbecq et al. (1975) and expanded by Okoli and Pawlowski (2004). Researchers first prepared a Knowledge Resource Nomination Worksheet (KRNW) modified from Okoli and Pawlowski (2004) to help categorize the experts prior to identifying them and to help avoid overlooking any important class of expert.

The KRNW was then populated with names, beginning with the professional network of the research team and that of the RIAT and identifying other candidate experts via a review of the relevant literature. This initial group of 154 port experts was contacted and provided with a brief description of the study, queried for basic biographical information (e.g., number of papers published, length of practice, or number of years of tenure in government or non-governmental organization positions), and asked to nominate other potential experts for inclusion on the list. Experts were asked to nominate peers with expertise in the fields of seaport operations, planning, policy, seaport data, and/or the vulnerability of the Northeast U.S. MTS to climate and extreme weather impacts. This first round of contacts did not include invitations but was aimed at extending the KRNW to ensure that it included as many experts as could be accessed.

For this survey, of the 154 experts invited, 64 participated, for a response rate of 42%. Participating experts provided their predominant sector affiliation (Figure 10). These are divided into *Federal Government* (n=28), *Academic* (n=13), *Consultant* (n=10), *Port/MTS Practitioner* (n=4), *Non-governmental Organization* (n=2), *State Government* (n=1), and *Other* (n=6). The *other* category of expert affiliation was specified as Attorney (n=1), Contractor supporting the federal government (n=1), Consultant/port director/District engineer/Academic (n=1), Federal Government Academic (n=1), Port Authority (n=1), and Local Government (n=1) (Figure 10). These experts had between 14 to 40 years of experience in their fields, some were published, and all had affiliations to one or more of the following organizations: USACE, American Association of Port Authority, the American Society of Civil Engineers, Federal Highway

Administration, State Port Authorities, NOAA, U.S. Coast Guard (USCG), U.S. United States Coast Guard Academy, Environmental Protection Agency, Federal Emergency Management Agency, State Sea Grant, Transportation Management Areas, MARAD, and/or state universities (United States and Canada). Some of the experts serve as directors of port authorities, marine transportation recovery specialists, resilience directors at a port, professors, executive directors, directors of emergency management, civil engineers/marine consultants, etc.

Figure 10. Count of respondents' self-identified affiliations. Total n = 64.

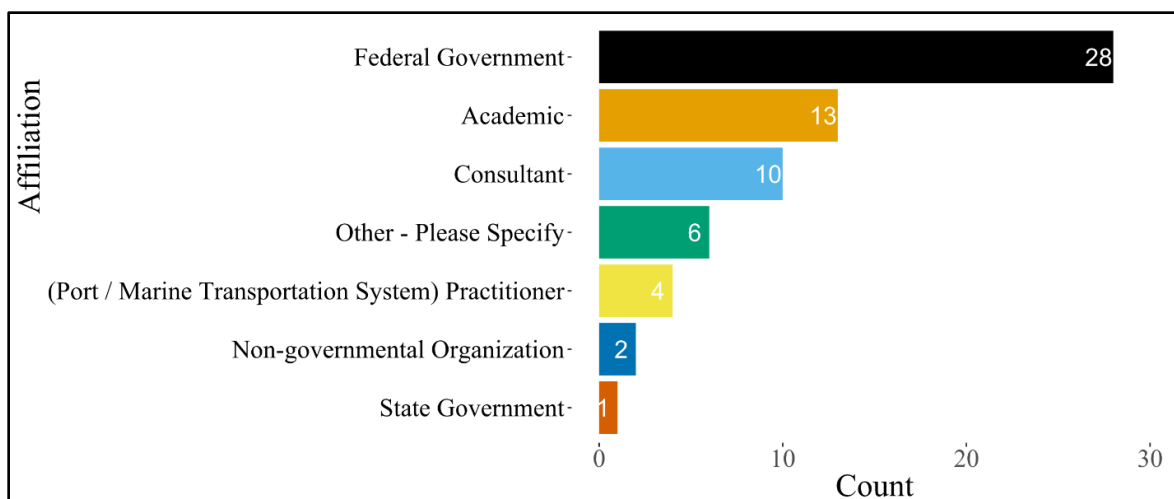

### 3.2.2 Online expert elicitation VAS survey


The objective of this survey was to measure port experts' perceptions of the suitability of available data to serve as indicators of seaport vulnerabilities to climate and extreme weather (Appendix J; for a webinar provided to participants with survey instructions see Appendix K). The VAS survey requested that participants evaluate 34 candidate indicators for correlation with the components of seaport vulnerability (for a summary description of the vulnerability indicators see McIntosh [2018]). In addition to evaluating candidate indicators, respondents were asked to rank --in their opinion-- the 10 *most* vulnerable ports and the 10 *least* vulnerable ports. The results of this question would be used in the final validation step of this project to compare subjective opinions of seaport vulnerability with the outputs of the model (see Chapter 5).

For each candidate indicator, respondents were given the indicator's description, units, data source, and example values, and respondents were asked to determine whether the candidate indicator correlated with the

exposure, sensitivity, and/or adaptive capacity of ports in the study area. In evaluating candidate indicators, respondents were instructed to consider port vulnerability holistically, inclusive of the port's surrounding socioeconomic and environmental systems. Respondents indicated the magnitude and direction of correlation by dragging a slider along a VAS line segment (Figure 9). To indicate *no correlation*, respondents were to leave the slider in the center of the line. Dragging the slider to the left indicated a negative correlation, and dragging the slider to the right indicated a positive correlation. The distance measure of how far the slider was moved was indicative of the magnitude of perceived correlation. As a second verification on the comprehensiveness of the set of candidate indicators, experts were also asked to suggest additional candidate indicators and data sources.

The candidate indicators were presented with their metadata, without assignment to a single component of vulnerability (i.e., exposure, sensitivity, adaptive capacity) and then respondents denoted each indicator's correlation (or lack of correlation) for each component. In this way, some indicators scored high in correlation with more than one component of vulnerability (Figure 11).

Figure 11. Candidate indicators of seaport vulnerability to climate and extreme weather, sorted by total median expert-perceived magnitude of correlation with each of the three components of vulnerability. Port-specific candidate indicators in bold.

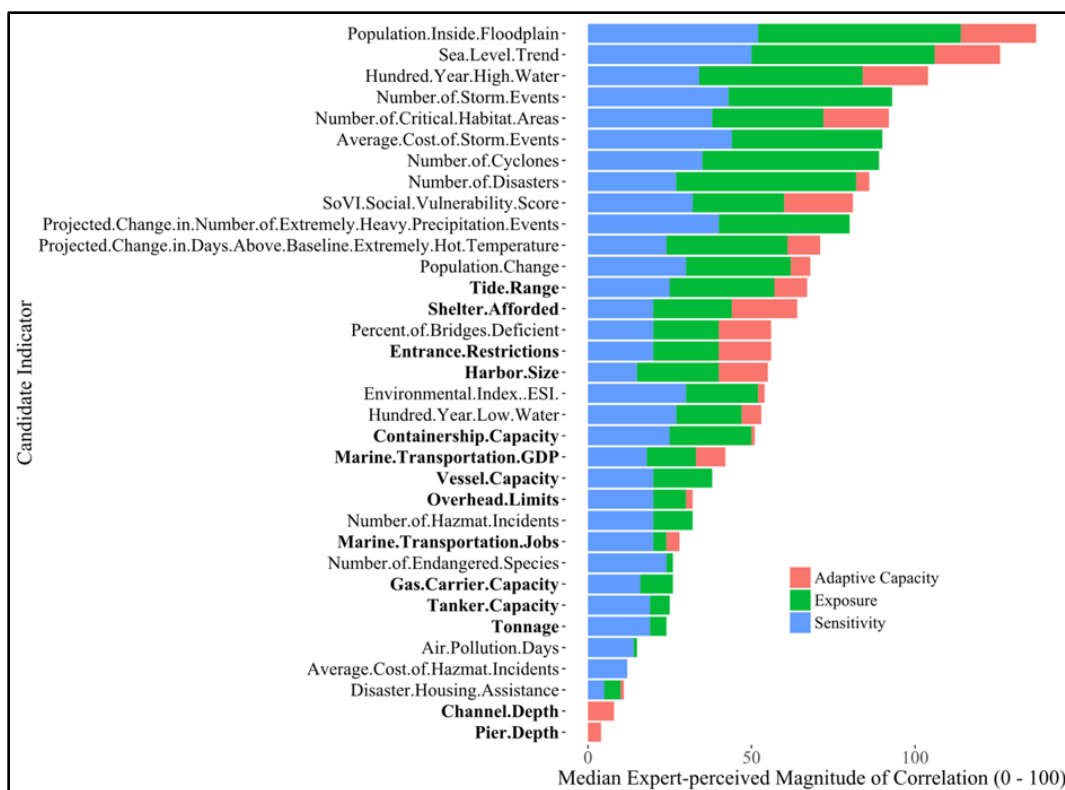

### 3.3 Results of VAS survey


For each of the 34 candidate indicators evaluated, the median<sup>1</sup> expert-perceived magnitude of correlation was calculated for each of the three components of vulnerability (Figure 11). The graphs use the median<sup>1</sup> rather than the mean of responses when aggregating scores for each candidate indicator. Interestingly, when values were aggregated, respondents' highest levels of perceived correlation were for place-based indicators; although 14 of the 34 candidate indicators were port-specific, the top-12 candidate indicators ranked by all three components of vulnerability total correlation were all place based (Figure 11). Also, noted is the low level of perceived correlation with adaptive capacity (pink) compared to exposure (green) and sensitivity (blue).

The indicator with the highest median expert-perceived correlation was the same for all three components of vulnerability; i.e., *population inside*

<sup>1</sup> The use of medians instead of the means reduces the effect of outliers (smaller or larger values) on the measure of central tendency.

*floodplain*. The indicator *sea level trend* also scored high, rated second highest in median correlation with exposure and sensitivity, and fourth highest with adaptive capacity. The highest scoring port-specific indicator (bold) was *tide range* (Figure 12), followed by *shelter afforded*, both metrics available from the World Port Index (NGIA 2015).

**Figure 12. Top-15 candidate indicators for exposure, in descending order of median expert-perceived magnitude of correlation with seaport exposure to climate and extreme weather impacts. Port-specific candidate indicators in bold.**

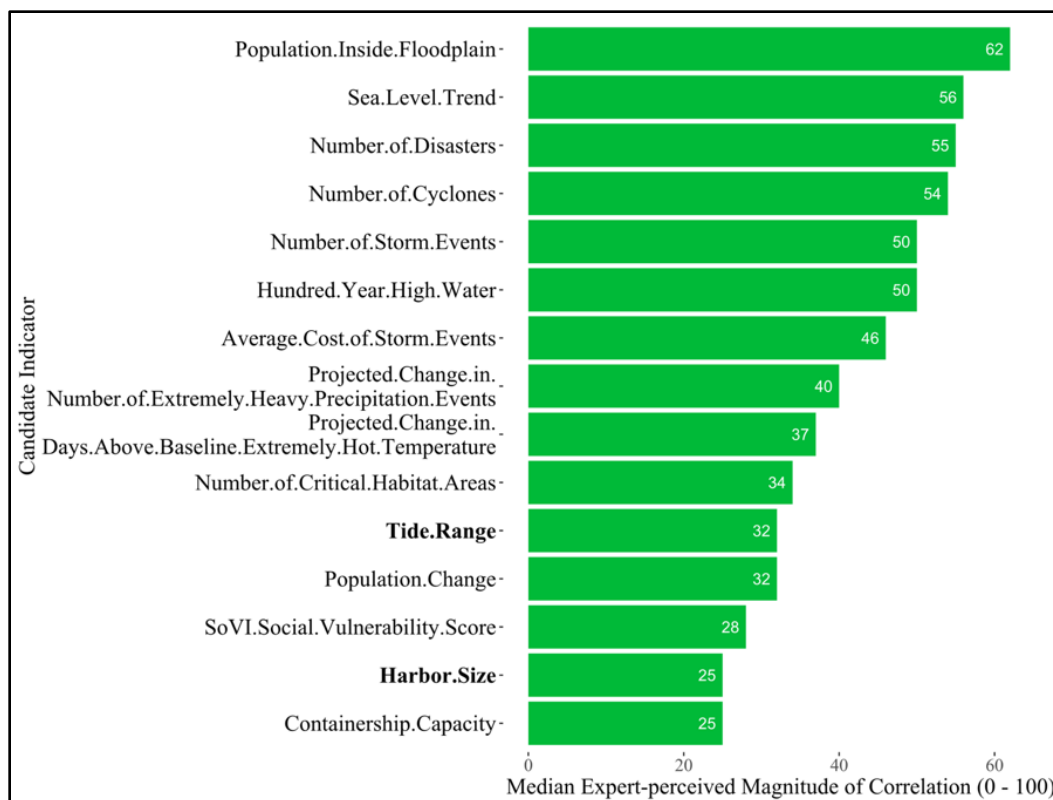


The median expert-perceived magnitude of correlation for each component of vulnerability reveals the experts' preferences for the most suitable candidate indicators to represent each concept for the sample set of CENAD ports (Figure 12 through Figure 14). The top-15 scoring indicators in descending order for correlation with exposure, sensitivity, and adaptive capacity can also be observed in Figure 12 through Figure 14.

The 10 indicators with the perceived highest median correlation with port exposure were all place-based (Figure 12). The port-specific indicator rated highest perceived correlation with exposure was tide range, ranked 11 of 34, followed by harbor size, ranked 14 of 34.

The top-13 indicators with the highest median perceived correlation with port sensitivity were all place based (Figure 13). As was the case with exposure in Figure 12, the two highest scoring indicators for correlation with sensitivity were also population inside floodplain and sea level trend, respectively. The port-specific indicators rated highest for perceived correlation with sensitivity was also the same as that for exposure. These indicators for sensitivity were tide range, ranked 14 of 34, followed by containership capacity, ranked 15 of 34.


**Figure 13. Top-15 candidate indicators for sensitivity, sorted by median expert-perceived magnitude of correlation with seaport sensitivity to climate and extreme weather impacts. Port-specific candidate indicators in bold.**

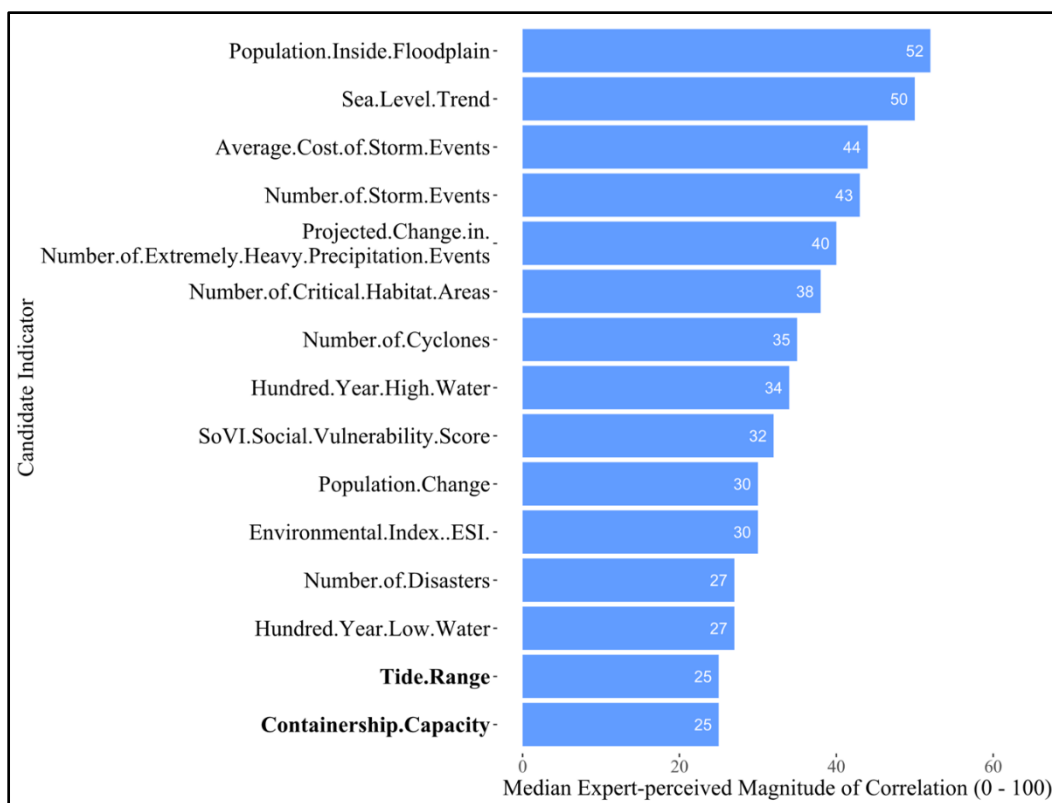

While the top-10 scoring indicators with the highest median perceived correlation with port exposure and sensitivity were all place-based, the same was not true for adaptive capacity (Figure 14). For correlation with adaptive capacity, port-specific indicators scored relatively high. In general, the port-specific indicator for adaptive capacity had a lower score than the 16th and 17th place for exposure and sensitivity indicators. The indicators for adaptive capacity that rated highest were shelter afforded, ranked 3 of 34, followed by *entrance restrictions*, 8 of 34 (Figure 14)

Although the distance measure of the VAS sliders is unitless, the results indicate an overall low level of expert-perceived correlation between candidate indicators and seaports' adaptive capacity (Figure 14) significantly lower than that for exposure (Figure 12) and sensitivity (Figure 13). The highest scoring candidate indicator for adaptive capacity, population inside floodplain, only scored 23 on the unitless VAS, which is lower than 16th place for exposure and lower than 17th place for sensitivity. Although candidate indicators scored generally low with adaptive capacity, port-specific indicators fared much better with adaptive capacity than with the other two components of vulnerability, with four of the top-10 indicators representing port-specific indicators (Figure 14).

**Figure 14. Top-15 candidate indicators for adaptive capacity, sorted by median expert-perceived magnitude of correlation with seaport adaptive capacity to climate and extreme weather impacts. Port-specific candidate indicators in bold. Overall, experts found significantly lower correlation with adaptive capacity than with the other two components of vulnerability.**

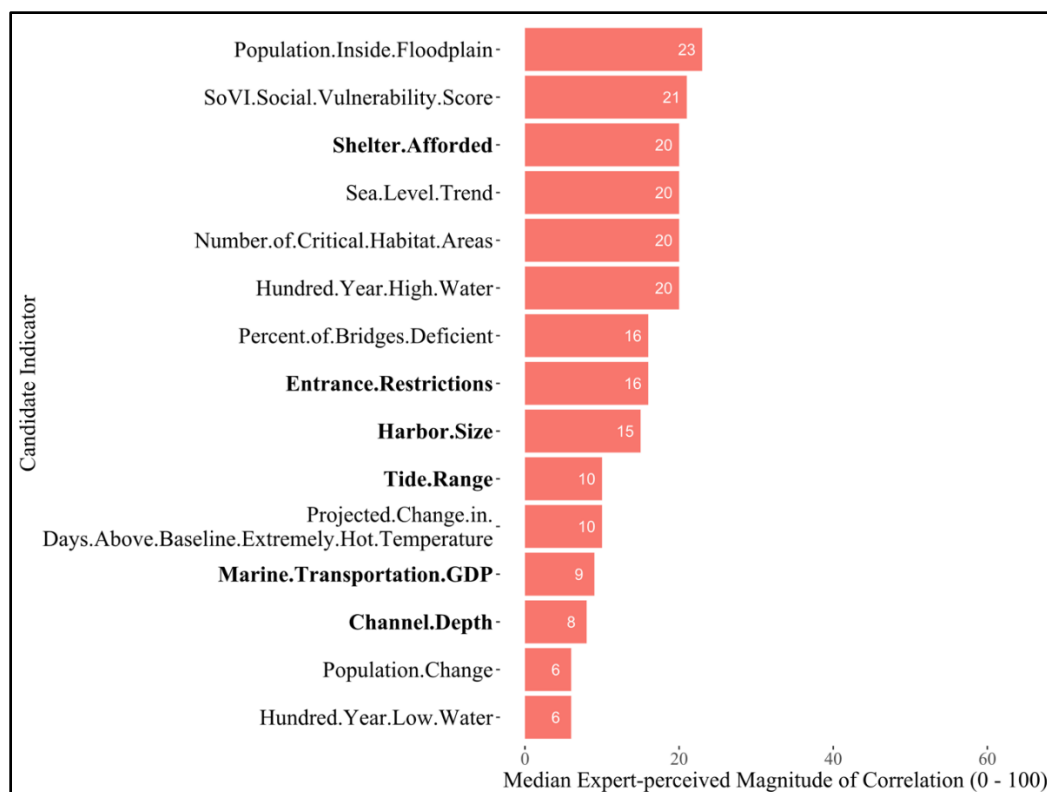

Because the VAS expert group was disproportionately represented by those with federal affiliations (Figure 10), the median aggregate group response considered in the previous four figures is necessarily dominated by those experts. Further insights can be gained by filtering results by expert type, revealing differences in the perceptions of the differently

affiliated experts. For example, academically affiliated experts found more and higher levels of correlation with adaptive capacity than did other types of experts. Practitioners found higher correlation with exposure and sensitivity indicators, with *Population inside Floodplains* and *SoVI Social Vulnerability Score* ranking highest (Figure 12 through Figure 14). This may be due to academically affiliated experts having more familiarity with the concept of adaptive capacity as it has become a more common subject in the academic literature, and/or reservations by others in defining a correlation for the more difficult or abstract indicators.

### 3.4 Seven additional indicators suggested by port experts

When asked to suggest additional candidate indicators, respondent port experts suggested seven indicators that may warrant further development but did not meet the data requirements (open data, coverage across the 22 ports in the study area) to be included in this study (Table 3). Some of the suggested indicators that currently lack sufficient data coverage could be synthesized from a combination of other available data sources, derived via geographic information systems (GIS) or compiled via additional computation for evaluation in future studies. For example, *robustness of transportation infrastructure*, measured in terms of the number of backup routes, may be determinable via GIS analysis of each ports' multimodal connections' elevations (Hategekimana et al. 2018); however, such indicators will be highly sensitive to the value judgment of how each port is delimited.

Port interdependencies also present potential for inclusion in indicator development (e.g., the suggested indicator *distance to nearest alternative seaport*), which would capture the availability of backup ports available to handle a port's primary cargo should that port experience downtime. Though not presently identifiable in openly available data sources, such an indicator could be synthesized from data records of port cargo types with a similar caveat that it will also require the value judgment of what qualifies as an alternative port in terms of ability to handle similar cargo.



**Table 3. Expert-suggested candidate indicators of seaport vulnerability to climate and extreme weather impacts. While these suggested candidate indicators lacked the readily available data required to be included in the VAS survey, they may hold promise for further development provided data can be synthesized or compiled from identifiable sources.**

Indicator	Units	Description	Data Source
Real estate values	% of tax base at risk	Sea level rise (SLR) changes in Nuisance and Repetitive Flooding	NA
Distance to nearest alternative seaport	Nautical or statute miles	Based on type of cargo received at the primary seaport	GIS, nautical charts, customs cargo records
Alternative freight transportation modes between seaports	Transportation modes for freight (Pipeline, rail, highway)	As paucity of alternative transportation modes increases, so does the criticality and therefore vulnerability of the primary port	U.S. DOT
Robustness of redundancy for transportation options	number of back-up routes	Robustness of port area to a shock to operations	GIS Mapping
land use	industrial/mixed use	low value vs. high value infrastructure	NA
Age of infrastructure	Years	Average age of critical port infrastructure	NA
Surface Transportation Vulnerability	NA	Ports are dependent on surface access	Local, perhaps Federal High Way Administration (FHWA)

### 3.5 Discussion of VAS results

To further IBVA development for the seaport sector and to determine the suitability of available open-data to differentiate ports within a region in terms of relative climate and extreme weather vulnerabilities, researchers applied expert-elicitation methods to refine and evaluate a set of high-level indicators of seaport climate vulnerability. Researchers first held a *Mind mapping* exercise with MTS experts to refine a set of candidate indicators, then developed and tested a VAS survey instrument for expert evaluation of the selected candidate indicators of seaport vulnerability to climate and extreme weather impacts for the 22 medium and high-use ports of the USACE North Atlantic Division. The results of the VAS survey reveal which indicators port experts found relatively more correlated with the components of climate vulnerability for seaports. The results can be used to aid in indicator selection for IBVA and CCVA development work in the seaport sector, and the indicators themselves can serve as high-level screening tools for quick comparative analyses among multiple ports.

### 3.5.1 Low expert-perceived correlation with adaptive capacity

Results suggest that available open-data can be developed into expert-supported indicators of seaport climate exposure and sensitivity. However, results also suggest relatively little expert-perceived correlation between open-data and a port's adaptive capacity. For the 34 candidate indicators that were evaluated, none scored a median rating higher than 23 on the unitless VAS scale of correlation with adaptive capacity, compared to a high of 62 with exposure and 52 with sensitivity. This low level of perceived correlation with adaptive capacity suggests a dearth of open-data sources suitable for representing the adaptive capacity of seaports to climate and extreme weather impacts. It also suggests that the concept of adaptive capacity is considered by port experts to be more difficult to represent with quantitative data than the concepts of exposure or sensitivity.

**From the selected 34 candidate indicators, respondents found higher levels of correlation with the components of vulnerability for place-based indicators than for port-specific ones.**

### 3.5.2 Expert preference for place-based indicators

Results of the VAS survey also indicate that respondents reserve their highest levels of aggregate perceived correlation for place-based indicators; though 14 of the 34 candidate indicators were port specific, the top-12 candidate indicators ranked by total correlation were all place-based. While port-specific indicators scored low overall, they fared better with adaptive capacity than with exposure or sensitivity, which suggests that more or different port-specific data reporting may lead to improvements in the ability to measure a port's relative adaptive capacity.

While the 34 candidate indicators encompassed a combination of 14 port-specific indicators (i.e., those that capture a specific aspect of the port) and 20 place-based indicators (i.e., those that capture the hazards-of-place at the county scale), respondents found higher levels of correlation with the components of vulnerability for place-based indicators than for port-specific ones. For both correlation with exposure (Figure 12) and with sensitivity (Figure 13), the 10 highest rated candidate indicators were all place-based. For correlation with adaptive capacity, however, while noticeably lower in magnitude, four of the top-10 indicators were port specific, and a port-specific indicator scored second highest overall

(Figure 14). This suggests that of the 34 candidate indicators evaluated, respondents generally preferred the place-based indicators for representing the exposure and sensitivity of a seaport but preferred a mixture of place-based and port-specific indicators for representing a port's adaptive capacity.

This finding suggests that while adaptive capacity is considered by port experts to be the most difficult component of seaport climate vulnerability to quantify, if expert-supported indicators of seaport adaptive capacity are to be developed, they will most likely be developed from port-specific data rather than place-based data. This means that the adaptive capacity can be measured for the port facility by engaging with port stakeholders rather than relying on open-data indicators for the county where the port resides. As the current selection of port-specific data openly available for the CENAD sample of ports was found to have little expert-perceived correlation with the components of seaport climate vulnerability, efforts will have to be made to identify and share additional port-specific data that can better capture these concepts, and adaptive capacity in particular.

### 3.5.3 Variation of results for different expert-affiliation groups

Filtering responses by expert affiliation revealed differences in perceptions (Appendix J).

Academically affiliated experts were more willing to indicate correlation with adaptive capacity than other types of experts while federally affiliated experts indicated the least amount of correlation with adaptive capacity. These differences may reveal variance in the willingness to assert correlation with complicated concepts, difficulty of presumption, or making statements about things that are uncertain. Whereas academic jobs allow for statements based on an individual's opinion, federally affiliated experts often are interpreted as pertaining to the organization. These findings highlight the importance of a diverse expert group when using expert-elicitation methods.

**This body of work identified a set of 34 expert-evaluated indicators of seaport climate and extreme weather vulnerability from open data that can be monitored to assess relative vulnerabilities across ports.**

### 3.5.4 Limitations and next steps

As the population of experts with the requisite knowledge of the climate vulnerabilities of northeastern U.S. seaports is limited, this study was

limited by the sample size of respondent experts. While the total response rate was satisfactory, the total number of experts was not evenly distributed among the seven expert-affiliation categories (Figure 10). Accordingly, comparisons of responses by expert affiliation suffer from this small sample size. These expert-related limitations are a function of applying a stakeholder-driven approach, as opposed to a purely data-drive approach (e.g., SoVI [Cutter et al. 2003]). Instead of the purely data-driven approach described by the SoVI, this work takes a stakeholder-driven approach by including port experts in the development and weighting of the indicators, as this has been shown to increase the creditability of the index as a tool (Barnett et al. 2008; Sagar and Najam 1998).

An additional limitation stems from the difficulty of seeking and compiling a comprehensive list of candidate indicators for experts to evaluate. To lessen the risk of excluding potential candidate indicators, researchers asked experts *Mind map* to suggest additional or better indicators at both the *Mind map* stage and the VAS survey stage. The experts were able to suggest an indicator with a known data source with sufficient data availability for the sample of ports, suggesting that the search for open-data candidate indicators was suitably comprehensive. Next steps for future studies may involve furthering the development of those candidate indicators suggested by respondents in (McIntosh 2018), exploring non-open or proprietary sources of data for those indicators identified in (McIntosh 2018) but lacking available open-data sources, or synthesizing novel indicators from combinations of available data.

### 3.6 Conclusion

While the research literature currently lacks examples of multi-port, comparative CCVA for the seaport sector, this body of work has developed and contributed a set of 34 expert-evaluated indicators of seaport climate and extreme weather vulnerability from open data that can be monitored to assess relative vulnerabilities across ports. Further, this work quantified expert preferences for weighting indicators and the components of climate vulnerability for seaports and identified adaptive capacity as lacking representation in the available data. The stakeholder-driven method of identifying and evaluating candidate indicators could be replicated to develop new indicators for other port regions or other non-port sectors.

Expert-evaluation of 34 candidate indicators in the context of a sample of 22 CENAD ports resulted in port experts having found significantly

stronger correlation with the exposure and sensitivity of a port than with the adaptive capacity, suggesting a lack of open-data sources available for representing the adaptive capacity of seaports in the sample. This finding also suggests that port experts consider the concept of adaptive capacity to be less amenable to representation with quantitative data than the remaining two components of vulnerability (i.e., exposure and sensitivity).


These results suggest an opportunity exists for further research and development of standardized, comparative CCVA methods for seaports and the MTS, with the objective of supporting climate impact, adaptation and vulnerability decisions with information products that allow decision-makers to compare mechanisms and drivers of climate change across multiple ports. Before a complete IBVA framework for seaports can be developed, however, further work on the development of indicators of adaptive capacity will be needed.

**Results suggest that while *exposure* and *sensitivity* can presently be represented by expert-supported indicators, this research was unable to identify available open-data sources that could yield expert-supported indicators of *adaptive capacity*.**

## 4 Weighting Indicators via Analytic Hierarchy Process (AHP)

### 4.1 Introduction

This chapter describes the process of deriving weights for the previously selected indicators through an AHP. Once the weights are generated, the weighted indicators are aggregated into a composite indicator that can inform MTS decision-makers in the USACE and other agencies about the nature of seaport vulnerabilities to climate and extreme weather, the components and determinants of those vulnerabilities, the mechanisms through which a port is vulnerable, and the suitability of available data to serve as high-level indicators of seaport climate and extreme weather vulnerability. Respondents were also asked to rank the 10 *most* vulnerable ports and the 10 *least* vulnerable ports (see Chapter 3). These results were used as final validation step to compare subjective opinions of seaport vulnerability with the outputs of the model (see Chapter 5).

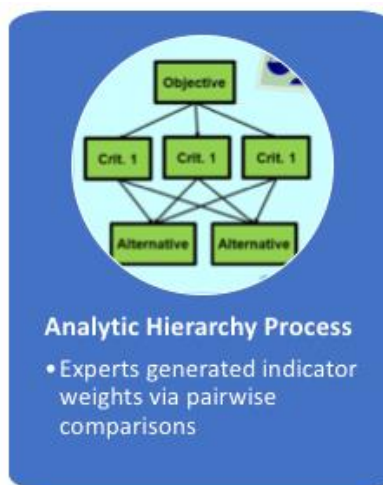

### 4.2 AHP

The AHP is a method to support multi-criteria decision-making. Initially described by Saaty (1977), it is based on the solution of an eigenvalue problem. Participants quantify weights by using pairwise comparisons. Results are arranged in a matrix where the dominant normalized right eigenvector represents the ratio scale (weighting) and the eigenvalue determines the consistency ratio (Goepel 2013; Saaty 1977, 1990b, 2006). The AHP is a well-established form to aggregate individual judgments for group decisions (Ramanathan and Ganesh 1994; Dedek 2013; Goepel 2013). Psychologists have noted that respondents have an easier time making judgments on a pair of alternatives at a time than simultaneously on all the alternatives (Ishizaka and Labib 2011). Using pairwise comparisons not only helps discover and correct logical inconsistencies (Goepel 2013), it also allows for translating subjective opinions into numeric relations, helping make group decisions more rational, transparent, and understandable (Goepel 2013; Saaty 2008a). Furthermore, AHP uses a ratio scale, which, unlike other methods using

interval scales, does not require units in the comparison (Kainulainen et al. 2009; Hovanov et al. 2008).


The AHP is useful as a standardized method for generating the weights of indicators in composite indices within a variety of different fields (e.g., environmental performance index [Dedeke 2013]), disaster-resilience index (Orencio and Fujii 2013), composite indicator of agricultural sustainability (Gómez-Limón and Riesgo 2009), flood hazards index (Hategekimana et al. 2018), and the urban public transport system quality (Pticina and Yatskiv 2015).

## 4.3 Methodology

### 4.3.1 Expert selection

Researchers invited the same group of 64 experts who contributed to the evaluation of candidate vulnerability indicators via the previous VAS survey (see Chapter 3) to participate in this AHP weighting exercise. These experts were sought for their specialized knowledge and experience in seaport operations, planning, policy, data, and the vulnerability of the U.S. MTS to climate and extreme weather impacts. This group of expert respondents was compiled via a KRNW and peer snowball sampling (see Chapter 3). Out of this expert pool, 37 experts participated in this AHP exercise, representing these affiliation categories: Federal (e.g., USCG, NOAA, USACE, MARAD), Practitioner (e.g., port authorities), Academic (e.g., professors, research analysts), and Consultant (Figure 15).

Figure 15. Count of participating experts' affiliations. Note: only 42% of the 64 invited experts participated in the survey.

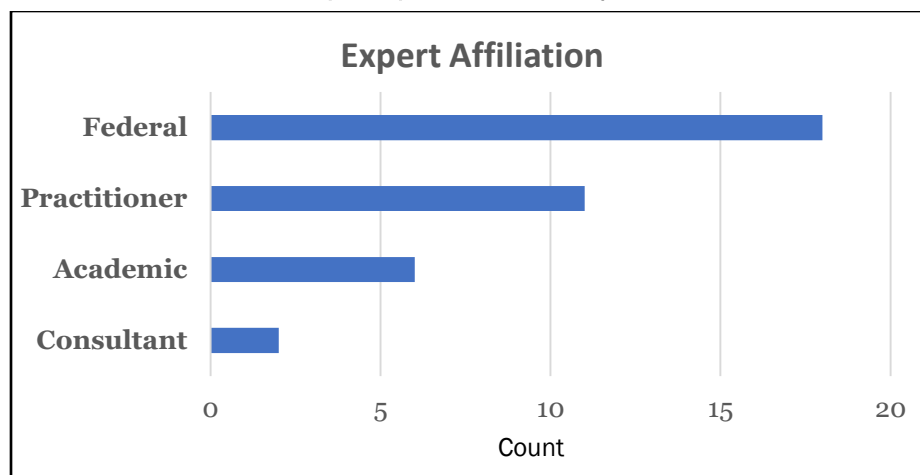

### 4.3.2 AHP webinars with 37 port experts

In the spring and summer of 2017, researchers held 21 separate webinars with a total of 37 participating port experts (Appendix K). During each webinar, participants were guided through the steps of the AHP using a web-based AHP system (Goepel 2017). Experts were given a data dictionary with descriptions, units, data sources, and example values for each of the 12 indicators to be weighted (see Data Dictionary PDF in [URI-Digital Commons](#)). Note: As mentioned earlier, best practice for AHP recommends each category should have at least 4, but not more than 7-10 sub-categories (Goepel 2013); researchers selected the six highest scoring indicators for exposure (Table 4) and the six highest scoring indicators for sensitivity (Table 5) for inclusion in the AHP exercise. For the AHP exercise, as with the previous VAS survey, respondents were instructed to consider port vulnerability holistically, inclusive of the port's surrounding socioeconomic and environmental systems, and to focus on 22 ports of the CENAD (Figure 7).

Table 4. Top-6 indicators for seaport exposure as identified by experts in the VAS survey.

Indicator	Rank for Exposure (expert-perceived magnitude of correlation)	Description	Units	Data Source
Population.Inside.Floodplain	1 (62)	Percentage of the port county population living inside the FEMA Floodplain	%	NOAA Coastal County Snapshots
Sea.Level.Trend	2 (56)	Local Mean Sea Level Trend	mm/yr	NOAA Tides and Currents: Sea Level Trends
Number.of.Disasters	3 (55)	Number of Presidential Disaster Declarations for the port county since 1953	Disaster Type	FEMA: Disaster Declarations
Number.of.Cyclones	4 (54)	Number of cyclones that have passed within 100 nm of the port since 1842	Number of cyclones	NOAA Historical Hurricane Tracks Tool
Number.of.Storm.Events	5 (50)	Number of storm events in port county with property damage > \$1M	Events	NOAA Storm Events Database



Indicator	Rank for Exposure (expert-perceived magnitude of correlation)	Description	Units	Data Source
Hundred.Year.Low.Water	6 (50)	1% annual exceedance probability low water level for the nearest NOAA tide station to the port, which corresponds to the level that would be exceeded one time per century	m below MLLW	NOAA Extreme Water Levels

**Table 5. Top-6 indicators of seaport sensitivity as identified by experts in the VAS survey.**

Indicator	Rank for Sensitivity (expert-perceived magnitude of correlation)	Description	Units	Data Source
Population.Inside.Floodplain	1 (52)	Percentage of the port county population living inside the FEMA Floodplain	%	NOAA Coastal County Snapshots
Sea.Level.Trend	2 (50)	Local Mean Sea Level Trend	mm / yr	NOAA Tides and Currents: Sea Level Trends
Average.Cost.of.Storm.Events	3 (44)	Average cost of property damage from storm events in the port county since 1950 with property damage > \$1M	\$	NOAA Storm Events Database
Number.of.Storm.Events	4 (43)	Number of storm events in port county w/ property damage > \$1M	Events	NOAA Storm Events Database
Projected.Change.in.Number.of.Extremely.Heavy.Precipitation.Events	5 (40)	The percent change from observed baseline of the average number of "Extremely Heavy" Precipitation Events projected for the end-of-century, downscaled to 12 km resolution for the port location	%	US DOT CMIP Climate Data Processing Tool

Indicator	Rank for Sensitivity (expert-perceived magnitude of correlation)	Description	Units	Data Source
Number.of.Critical.Habitat.Areas	6 (38)	Number of Critical Habitat Areas within 50 miles of the port	Areas	U.S. Fish and Wildlife Service

The AHP involved two levels; the first comprised weighting the three components of vulnerability (i.e., exposure, sensitivity, and adaptive capacity as described in the introduction to this report), and the second comprised weighting the six indicators of exposure and the six indicators of sensitivity (Figure 16). As AHP best practice recommends each category should have at least 4, but not more than 7 to 10 sub-categories (Goepel 2013), researchers selected the six highest scoring indicators for exposure (Table 4) and the six highest scoring indicators for sensitivity (Table 5) for inclusion in the AHP exercise described in the following sub-Chapter 4.4 “Results of AHP-generated weights.” (See Chapter 3 for description of indicators and selection process.)

Figure 16. Equal weighting scores in the AHP prior to the pairwise comparisons. Each column represents a level of the AHP, and each red rectangle indicates a node (for which a priority vector will be calculated).

Seaport Climate Vulnerability <div>AHP</div>	Adaptive Capacity	0.3333	
	Exposure	0.3333	<div>AHP</div>
	Sensitivity	0.3333	<div>AHP</div>

Because the earlier VAS survey failed to develop expert-supported indicators of adaptive capacity for seaport climate and extreme weather vulnerability (see Chapter 3), researchers did not include indicators of adaptive capacity for weighting in this AHP. The lack of indicators of adaptive capacity, however, did not prevent the derivation of weight for adaptive capacity as a component of seaport vulnerability to climate and weather extremes.

For the first level of the AHP, respondents weighted the three components of seaport vulnerability via pairwise comparisons. Respondents were given two components at a time and asked “With respect to seaport climate vulnerability, which criterion is more important, and how much more on a scale 1 to 9,” where “1” represents equal importance (Figure 17).

Figure 17. Pairwise comparisons of the three components of seaport vulnerability.

	A - wrt Seaport Climate Vulnerability - or B?	Equal	How much more?
1	<input checked="" type="radio"/> Adaptive Capacity or <input type="radio"/> Exposure	<input checked="" type="radio"/> 1	<input type="radio"/> 2 <input type="radio"/> 3 <input type="radio"/> 4 <input type="radio"/> 5 <input type="radio"/> 6 <input type="radio"/> 7 <input type="radio"/> 8 <input type="radio"/> 9
2	<input checked="" type="radio"/> Adaptive Capacity or <input type="radio"/> Sensitivity	<input checked="" type="radio"/> 1	<input type="radio"/> 2 <input type="radio"/> 3 <input type="radio"/> 4 <input type="radio"/> 5 <input type="radio"/> 6 <input type="radio"/> 7 <input type="radio"/> 8 <input type="radio"/> 9
3	<input checked="" type="radio"/> Exposure or <input type="radio"/> Sensitivity	<input checked="" type="radio"/> 1	<input type="radio"/> 2 <input type="radio"/> 3 <input type="radio"/> 4 <input type="radio"/> 5 <input type="radio"/> 6 <input type="radio"/> 7 <input type="radio"/> 8 <input type="radio"/> 9

The second level of the AHP involved two nodes: weighting six indicators of exposure, and weighting six indicators of sensitivity. For the former, respondents were given two indicators at a time and asked “With respect to seaport climate exposure, which criterion is more important, and how much more on a scale 1 to 9?” For calculating the number of pairwise comparisons required, Equation 1 is used where  $n$  is the number of components or indicators (Saaty 1977, 1990a; Orencio and Fujii 2013).

**Equation 1. Number of pairwise comparisons required for  $n$  indicators.**

$$(n)(n - 1)/2$$

For the six indicators of exposure (Table 4), respondents completed 15 pairwise comparisons, contrasting the relative importance of each indicator to every other indicator, one pair at a time. Similarly, the second node of this level of the AHP repeated this process with respect to sensitivity for the six indicators of seaport climate and extreme weather sensitivity (Table 5). For each respondent at each level of the AHP, the product of each paired comparison was recorded in a  $n \times n$  square matrix, with  $n$  equaling the number of indicators or components.

Denoted here are the criteria that were ranked by experts as  $[I_1, I_2, \dots, I_n]$ , where  $n$  is the number of components of vulnerability or the number of indicators compared. Based on experts’ responses, a preference matrix was derived for each respondent (Equation 2) of the form as follows:

**Equation 2. Preference matrix for AHP.**

$$A = [a_{ij}] \begin{bmatrix} 1 & a_{1j} & \cdots & a_{1n} \\ 1/a_{1j} & 1 & \cdots & a_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ 1/a_{1n} & 1/a_{2n} & \cdots & 1 \end{bmatrix}$$

Where  $a_{ij}$  is the preference for indicator  $I_i$  over  $I_j$  when both were compared pairwise, for  $i, j = 1, 2, \dots, n$ . If a respondent decided that indicator  $i$  was equally important to another indicator  $j$ , a comparison of  $a_{ij} = a_{ji} = 1$  was recorded. If a respondent considered indicator  $i$  much more important than indicator  $j$ , the preference-matrix score was based on  $a_{ij} = 9$  and its reciprocal given as  $a_{ji} = 1/9$ , where  $a_{ij} > 0$ .

After compiling a preference matrix for each expert for each node of the AHP, the dominant eigenvector of each matrix was then calculated using the power method (Larson 2016; Goepel 2013) with the number of iterations limited to 20, for an approximation error of  $1 \times 10^{-7}$  (Goepel 2013). This normalized principal eigenvector, also called a priority vector<sup>1</sup>, gives the relative weights of the indicators and components of vulnerability that were compared.

The consistency of a respondent's answers was checked using the linear fit method (Equation 3) proposed by Alonso and Lamata (2006) to calculate the consistency ratio,  $CR$ , for each respondent's preference matrix for each node of the AHP, where  $\lambda_{\max}$  represents the principal eigenvalue obtained from the summation of products between each element of the priority vector and the sum of columns of the preference matrix, and  $n$  represents the number of dimensions of the matrix.

**Equation 3. Linear fit method of calculating consistency ratio.**

$$CR = \frac{\lambda_{\max} - n}{2.7699 \cdot n - 4.3513 - n}$$

If a respondent completed a node of pairwise comparisons that yielded a  $CR$  greater than 10%, the software prompted the respondent to correct the inconsistencies by highlighting the three most inconsistent judgments and allowing adjustments.

Aggregation of individual judgments (AIJ) was based on the weighted geometric mean (WGM) of all participants' judgments (Aull-Hyde et al. 2006). The software calculated the geometric mean and standard deviation of all  $K$  participants' individual judgments  $pwc_k$  to derive a consolidated preference matrix,  $a_{ij}^{cons}$ . The WGM-AIJ process consisted of summing individual judgements,  $pwc$ , over  $K$  participants, squaring the

---

<sup>1</sup> Because the vector is normalized, the sum of all elements in a priority vector is equal to 1.

sum, calculating the geometric mean of each *pwc*, and using the means to create a consolidated preference matrix (Equation 4).

**Equation 4. Consolidated preference matrix based on the geometric mean of individual judgments.**

$$a_{ij}^{cons} = (\prod_{k=1}^K a_{ij})^{\frac{1}{K}}$$

To measure the consensus for the aggregated group result, the AHP software used Shannon entropy and its partitioning in two independent components (alpha and beta diversity) to derive an AHP consensus indicator based on relative homogeneity *S* (Goepel 2013). The consensus of the complete hierarchy was calculated as the weighted arithmetic mean of the consensus of all hierarchy nodes. This similarity measure, *S*, is zero when the priorities of all *pwc* are completely distinct and *S*=1 when the priorities of all *pwc* are identical (Goepel 2013).

#### 4.4 Results of AHP-generated weights

The aggregation of judgments from the first level of the AHP, which weighted the three components of seaport vulnerability to climate and extreme weather, resulted in exposure ranked most important, with a ratio scale (weight) of 0.394 (Table 6). Adaptive capacity was ranked a close second, with a weight of 0.390, which is noteworthy since the component of adaptive capacity lacks expert-supported indicators. Sensitivity was ranked least important of the three components, with a weight of 0.216. For this node, the maximum consistency ratio, *CR*, was 0.1% (highly consistent), and the group consensus, *S*, was 50.1% (low)<sup>1</sup>.

**Table 6. Results of AHP consolidated group preferences for the relative importance of the components of seaport climate and extreme weather vulnerability.**

Component	Weight	Rank
Exposure	0.394	1
Adaptive Capacity	0.390	2
Sensitivity	0.216	3

<sup>1</sup> Goepel, K. D. "Implementing the Analytic Hierarchy Process as a Standard Method for Multi-Criteria Decision Making in Corporate Enterprises—A New AHP Excel Template with Multiple Inputs." *Proceedings of the International Symposium on the Analytic Hierarchy Process*, 2013, 1-10, considers the following interpretation of AHP consensus; <50% (very low), 50%-65% (low), 65%-75% (moderate), 75%-85% (high), >85% (very high).

The second level of the AHP consisted of two nodes; the first evaluated six indicators for relative importance in terms of seaport exposure to climate and weather extremes, and the second node evaluated six indicators in terms of seaport sensitivity. The first node resulted in the indicator *number of disasters*, ranked most important for the component of exposure with a weight of 0.200 and resulted in weights for the remaining indicators of exposure (Table 7). For this node, the maximum consistency ratio, *CR*, was 0.3% (highly consistent), and the group consensus, *S*, was 53.6% (low).

**Table 7. Consolidated group preferences for the relative importance of indicators of seaport exposure to climate and weather extremes.**

Indicator of <i>Exposure</i>	Weight	Rank
Number of Disasters	0.200	1
Number of Storm Events	0.196	2
Sea Level Trend	0.180	3
Hundred Year High Water	0.163	4
Number of Cyclones	0.143	5
Projected Change in Extreme Precipitation	0.118	6

The second node of the second AHP level resulted in the indicator population inside floodplain, ranked most important for the component of sensitivity with a weight of 0.229 and resulted in the remaining indicators of sensitivity weighted (Table 8). For this node, the maximum consistency ratio, *CR*, was 0.5% (highly consistent), and the group consensus, *S*, was 61.1% (low).

**Table 8. Consolidated group preferences for the relative importance of indicators of seaport sensitivity to climate and weather extremes.**

Indicator of Sensitivity	Weight	Rank
Population Inside Floodplain	0.229	1
SoVI Social Vulnerability Index Score	0.213	2
Average Cost of Storm Events	0.210	3
ESI	0.125	4
Population Change	0.119	5
Number Critical Habitat Areas	0.104	6

These indicator weights were then used to generate a composite index of seaport vulnerability (minus adaptive capacity) to climate and extreme weather impacts with a Weight Sum Model (WSM) (see Chapter 5, Equation 5).

## 4.5 Discussion

The AHP resulted in adaptive capacity being ranked close to exposure in terms of importance with respect to seaport climate and extreme weather vulnerability. This suggests that port experts consider adaptive capacity to be more important than sensitivity and practically equal in importance to exposure with respect to seaport vulnerability. Though experts place a high degree of importance on adaptive capacity as a component of vulnerability, adaptive capacity may be the most difficult of the three components of seaport vulnerability to represent with quantitative data. This discrepancy points to a need to improve the data collection and sharing of metrics that can capture the concept of adaptive capacity for ports. It is also possible that the concept of adaptive capacity may be better captured by other, less quantitative assessment methods. This finding also suggests a disconnect between what experts perceive as an important component to understanding seaport vulnerability and the types of data that are currently being reported and available to represent that component.

A limitation of this AHP method can be the difficulty of achieving high levels of group consensus. For each of the three nodes of this AHP, the consensus indicator,  $S$ , was low (50.1%, 53.6%, 61.1%), suggesting low relative homogeneity of expert preferences. Improvements in group consensus may be achieved by using iterative approaches such as

**Using the AHP expert-based survey, weights were developed for 12 indicators of seaport *exposure* and *sensitivity* (2 of 3 vulnerability components) to climate and extreme weather impacts. From this survey, although the indicators for *adaptive capacity* did not rank high, as vulnerability component, experts weighted *adaptive capacity* higher than *sensitivity* and nearly equal to *exposure* in importance with respect to seaport climate and extreme weather vulnerability.**



the Delphi method<sup>1</sup>, in which participants are shown descriptive statistics of the group responses and given the opportunity to revise their answers during subsequent iterations of the AHP, as was employed in (Orencio and Fujii 2013). A drawback of this iterative approach, however, is the additional time required to complete the process. For this study, researchers held 21 different webinars lasting approximately 30 minutes to 1 hour. Experts may be reluctant to participate in a longer process. As the number of pairwise comparisons increases quickly due to the number required for  $n$  indicators (Equation 1), or the number of ports, even a single-round AHP can become an imposition on the time constraints of busy professional experts.

## 4.6 Conclusion

To further the development of IBVA methods for the port sector, this study performed an AHP with 37 port experts to develop weights for the three components of vulnerability (i.e., exposure, sensitivity, and adaptive capacity) and for a selection of 12 indicators of seaport exposure and sensitivity to climate and extreme weather impacts. The AHP weighted the importance of adaptive capacity higher than sensitivity and nearly equal to exposure with respect to seaport climate and extreme weather vulnerability. This finding suggests a disconnect between what experts believe is an important component to understanding seaport vulnerability to meteorological and climatological threats, and the types of data that are currently being reported and available to represent that component. An opportunity for future research exists to develop an answer to what types of data, if any, experts would accept as representative of the concept of seaport adaptive capacity.


---

<sup>1</sup> The Delphi method is a structured communication technique designed to obtain opinion consensus of a group of experts by subjecting them to a series of questionnaires interspersed with feedback in the form of a statistical representation of the group response. The goal of employing the Delphi method is to reduce the range of responses and arrive at something closer to expert consensus.

## 5 Trialing a Prototype Composite Index of Seaport Climate Vulnerability

### 5.1 Introduction

After generating the vulnerability indicator and the component's weights via AHP, the next step was to create a composite index of seaport vulnerability based on the port experts developed weights. This chapter describes the aggregation of indicators into weighted scores and the validation of the output through comparison to experts' subjective rankings of seaport vulnerability to climate and extreme weather events (Figure 6).

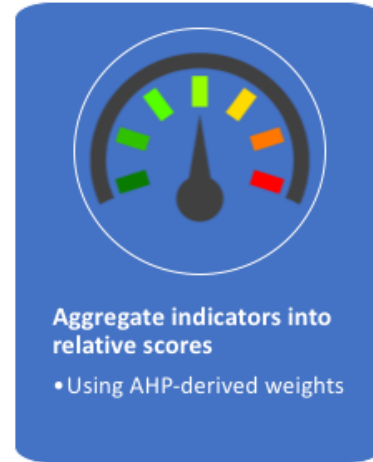

### 5.2 Methodology: Aggregating weighted indicators

Due to the lack of expert-supported indicators of adaptive capacity, the AHP-based composite index was limited to the aggregation of only two of the three components of vulnerability: exposure and sensitivity. This yielded a composite score that may be considered similar to vulnerability indicator minus the component of adaptive capacity. Researchers aggregated these indicators into a composite index of vulnerability using a WSM (Equation 5). In Equation 5,  $n$  represents the number of decision criteria (i.e., indicators or components),  $m$  represents the number of ports,  $w_j$  represents the relative weight of indicator  $I_j$ , and  $p_{ij}$  represents the performance of port  $A_i$  when evaluated in terms of indicator  $I_j$ .

Equation 5. WSM.

$$A_i^{WSM-score} = \sum_{j=1}^n w_j p_{ij}, \text{ for } i = 1, 2, 3 \dots, m.$$

To create the composite index for the CENAD ports based on this WSM, researchers first compiled data on all 12 of the indicators used in the AHP for the 22 ports of the CENAD. Missing values were imputed with the indicator's mean value. Afterwards, the input variables were standardized using z-score standardization (Equation 6), generating variables with a

mean of 0 and a standard deviation of 1. This standardization allows for indicators with disparate units to be combined (Cutter et al. 2003).

**Equation 6. Z-score standardization.**

$$z = \frac{X - \mu}{\sigma}$$

A composite indicator for exposure was created by summing the products of each exposure indicator and its weight. Next, a composite indicator for sensitivity was created by summing the products of each sensitivity indicator and its weight. The two composite indicators of exposure and sensitivity were then each multiplied by their respective component weights and summed together. The resultant composite indicator represents the combined exposure and sensitivity of the sample ports used to compile a composite index of seaport vulnerability (minus adaptive capacity) for the CENAD sample of ports. Afterwards, the port rankings generated by the composite index were compared to the experts' subjective ranking of port vulnerability obtained from the previous VAS survey.

### **5.3 Results of Weighted Sum Model (WSM): Composite indices of CENAD ports**

Using the AHP-generated weights based on the WSM, researchers obtained a port's vulnerability ranking value. This value represents the port's level of vulnerability to climate and extreme weather. Additionally, researchers recorded a priori ranking generated<sup>1</sup> subjectively by the same participating experts. This allowed for a comparison between the two rank measurements. Next, researchers compiled composite indices for the CENAD sample of ports. Applying the AHP-generated indicator weights to the z-score-standardized input variables for 22 CENAD ports and aggregating them in a WSM yielded the following ranking (Table 9) where a larger number corresponds to a higher degree of vulnerability. Results can also be classified using quartiles or standard deviations to create

---

<sup>1</sup> As part of the VAS survey described in McIntosh, R. D., and Becker, A. 2018. *Expert Evaluation of Open-Data Indicators of Seaport Vulnerability to Climate and Extreme Weather for U.S. North Atlantic Ports*, University of Rhode Island, port experts were asked to rank the top-10 most vulnerable ports out of the sample of 22 CENAD ports. The rank distribution (Table 8) was generated from a sum of weighted values, which were weighted as the inverse of the number of ports the respondent chose to rank.

classes like *high*, *medium*, and *low* to illustrate the vulnerability scores as illustrated in the *hot spots* map (Figure 18).

**Table 9. Model-generated ranking of USACE CENAD ports by vulnerability to climate and extreme weather events. A score of 1 indicates most vulnerable, and -1 indicates least vulnerable. Note that here, vulnerability includes exposure and sensitivity, but not adaptive capacity.**

Port	Vulnerability Score
Virginia, VA	0.46
Boston, MA	0.24
Philadelphia, PA	0.11
New Haven, CT	0.10
Port Jefferson, NY	0.10
Portland, ME	0.10
Hopewell, VA	0.07
Searsport, ME	0.04
Fall River, MA	0.02
Camden-Gloucester, NJ	0.02
Baltimore, MD	0.00
Bridgeport, CT	-0.03
Hempstead, NY	-0.04
Paulsboro, NJ	-0.04
Albany, NY	-0.05
Wilmington, DE	-0.07
Marcus Hook, PA	-0.09
Chester, PA	-0.10
Penn Manor, PA	-0.11
Portsmouth, NH	-0.12
New York and New Jersey, NY	-0.12
Providence, RI	-0.13

With the exception the of the Port of New York and New Jersey, the model-generated port vulnerability rankings matched the subjective (validation) highest vulnerability ranking by experts in the VAS survey (Table 10). The model captured three out of four of the most vulnerable ports consistent with the experts' rankings.

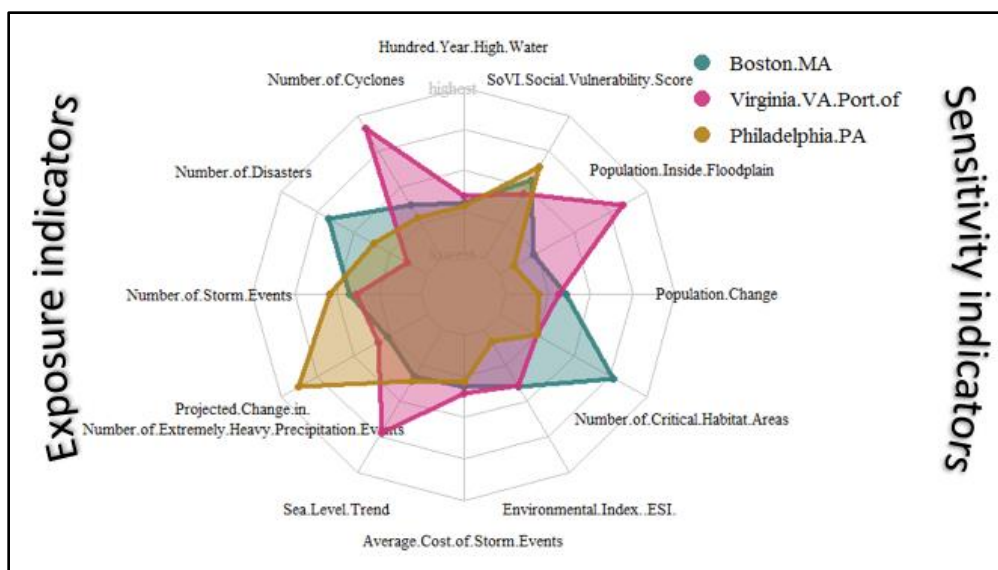


**Table 10. Port experts' consolidated subjective ranking of the top-10 USACE CENAD ports most vulnerable to climate and extreme weather (from McIntosh 2018).**

Port	Experts' Rank
Virginia, VA	1
New York and New Jersey, NY	2
Boston, MA	3
New Haven, CT	4
Baltimore, MD	5
Providence, RI	6
Portland, ME	7
Portsmouth, NH	8
Philadelphia, PA	9
Hempstead, NY	10


One benefit of indicator-based composite indices is their ability to synthesize multiple variables into a single, measurable concept while still retaining the ability to explore the disaggregated substructure behind the composite construct. As such, their users are able to ask “*Why* does a particular entity score high or low according to this index?” The disaggregated substructure behind the composite vulnerability scores can be used to explore the relative performance of a port in terms of the individual scores for the three highest scoring ports from the composite index indicators (Figure 19), or for the three lowest scoring ports from the composite index (Figure 20). In Figure 19, the Number of Critical Habitats (exposure) indicator scored highest for the Port of Boston, while the Number of Cyclones (exposure) and Population inside Floodplains (sensitivity) scored highest for the port of Virginia and the Projected Change in Number of Extremely Heavy Precipitation Events scored highest for the port of Philadelphia. Whereas the Port of Virginia scored high (i.e., relatively more vulnerable) in the “Number.of.Cyclones” indicator and relatively low with respect to the “Number.of.Disasters,” the opposite is seen for the Boston (Figure 19).

Figure 19. Disaggregated substructure of the composite-index vulnerability scores of the three highest scoring ports. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half.



Comparison of the Ports of New York and New Jersey, Portsmouth (NH), and Providence (RI) shows differences in the underlying vulnerability concern of each port in terms of the individual indicators (Figure 20). This type of differentiation can assist decision-makers in understanding the mechanisms and drivers behind a composite score and give them more insights for better decisions.

Figure 20. Disaggregated substructure of the composite-index vulnerability scores of the three lowest scoring ports. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half.

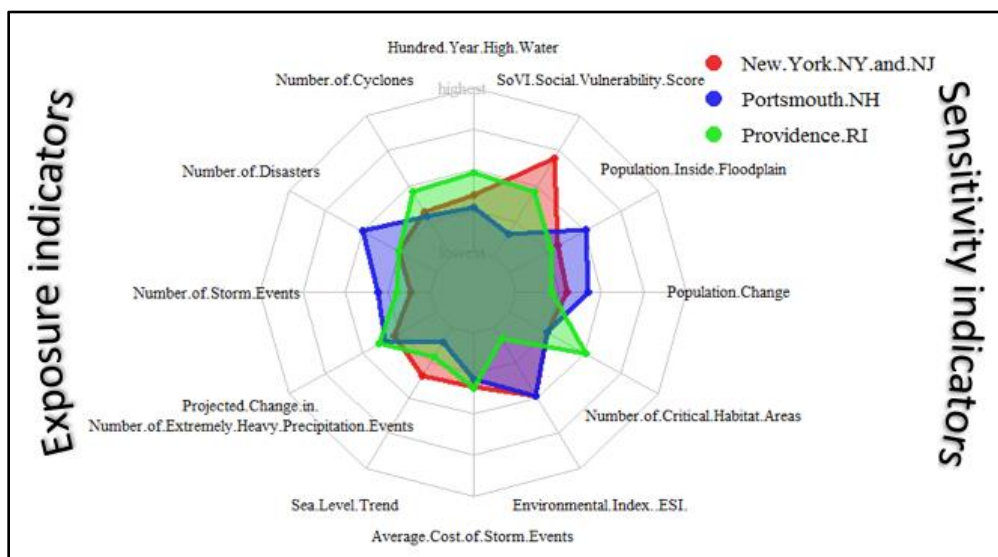

The substructures created from the composite index scores of the three least vulnerable ports yield insight into the discrepancy between the index rankings and the subjective, expert-rankings (Figure 20). While the Port of New York and New Jersey was considered second most vulnerable according to expert perception, the weighted index scored it second *least* vulnerable. While the Port of New York and New Jersey scored high (i.e., relatively more vulnerable) in the SoVI indicator, it scored near the bottom of the sample in nearly every other indicator (Figure 20). This may be an artifact of the method of compiling the indicator data for the sample of ports. Most place-based indicators were gathered at the county level, and for this experiment, the Port of New York and New Jersey was represented solely by New York County. Similarly, the Port of Providence was subjectively ranked sixth most vulnerable by port experts yet scored least vulnerable of all in the composite index. While Providence scored near the middle of the sample for *number of critical habitat areas*, *hundred year high water*, and *number of cyclones*, it scored near the bottom of the sample for *number of disasters*, *number of storm events*, and ESI, and did not score higher than average for any indicator (Figure 20). Other radar plots for the 22 ports studied are shared in Appendix L.

## 5.4 Discussion

The method of generating indicator weights based on aggregated expert preferences using AHP described in this paper presents promise and limitations. Port rankings generated by a composite index based on a WSM using the AHP-derived weights was compared to an a priori subjective ranking generated by port experts. Though the model lacked indicators of adaptive capacity, it matched (Table 9) the experts' ranking for the most vulnerable port and also matched three of the four ports ranked most vulnerable by the experts (Table 10).

Previous climate vulnerability assessments of seaports have tended to focus on the single port scale as case studies (Koppe et al. 2012; Cox et al. 2013; USDOT 2014; Messner et al. 2013; Chhetri et al. 2014), or self-assessment tools (NOAA OCM 2015; Sempier et al. 2010; Morris and Sempier 2016; Stenek et al. 2011; Roos and Kliemann Neto 2017). Other studies focused on presenting general frameworks and guidelines for studying climate vulnerability (Scott et al. 2013; Mansouri et al. 2010). The contribution of this study is unique, as it proposes an indicator-based composite index for the purpose of developing seaport CCVA at the multi-port scale.



To the observed problem (i.e., the current difficulty of comparing relative vulnerability across ports), this work contributes a prototype composite index (and a method to replicate such an index for other sectors) that allows rudimentary quantitative comparisons of exposure and sensitivity levels across ports. This prototype index was able to capture relative outliers in the sample of ports (i.e., the main objective of composite-indices) and presents the promise of an indicator-based approach to address relative vulnerability.

#### **5.4.1 Adaptive capacity considered highly important**

Adaptive capacity is defined in the glossary of the IPCC Fifth Assessment Report as “The ability of systems, institutions, humans and other organisms to adjust to potential damage, to take advantage of opportunities, or to respond to consequences” (IPCC 2014b). As noted by Siders, this definition bears some resemblance to generally accepted definitions of resilience (Siders 2016) (i.e., the ability to bounce back from an impact<sup>1</sup>). As such, Siders recommends that adaptive capacity can be distinguished from resilience by ascribing resilience as maintaining stability by *bouncing back* to pre-shock conditions, and by taking adaptive capacity to refer to the broader ability of a system to self-organize, learn, and embrace change to limit future harms (Klein et al. 2003; Siders 2016).

As noted by Brooks et al. (2005), adaptive capacity is a component of vulnerability primarily associated with governance. Hence, next-step efforts to assess relative levels of seaport adaptive capacity should start by examining ports’ governance structures to find measurable metrics to assess and compare the ports’ ability to adjust, take advantage, or respond to climate and weather impacts.

#### **5.4.2 Limitations**

The aggregation of weighted indicators into a composite index was done as a means to validate the AHP-generated weights. By comparing the port-rankings that were generated through a WSM to the subjective port-ranking, this process produced insights into the benefits and limitations of such methods.

---

<sup>1</sup> McIntosh, R. D., and A. Becker. Unpublished. “Expert Evaluation of Open-Data Indicators of Seaport Vulnerability to Climate and Extreme Weather for U.S. North Atlantic Ports.” *Journal of Ocean and Coastal Management*.

As a means to identify relative outliers among a sample, this method successfully matched the most vulnerable port and three of the four most vulnerable ports as ranked subjectively by port experts. While partially successful at identifying the relative outliers among the sample of ports, the composite index also ranked several ports (e.g., Providence, New York and New Jersey) near the bottom of the sample that experts had subjectively ranked near the top.

Some of this discrepancy may be due to the sensitivity of indicator-based composite indices to differences in the interpretation of data used for the indicators. For example, an indicator for an entity that spans multiple counties, like the Port of New York and New Jersey, could be represented by a measure of central tendency of the data for the collection of counties, by the data from the county with most extreme value, or by a single representative county. In this experiment, the single county of New York was taken to represent the Port of New York and New Jersey for the purposes of compiling the indicator data, which may have resulted in lower than expected values for that port in some of the indicators. Additionally, indicator-based assessments will always be limited by the quality of data available to incorporate into them.

Although the AHP weighted all three components of vulnerability, including adaptive capacity, and the composite index incorporated the weights for the components of exposure and sensitivity into the WSM, it should be noted that this composite index of seaport vulnerability to climate and extreme-weather did not include indicators of adaptive capacity. As such, the composite index is more accurately described as a weighted measure of seaport exposure and sensitivity to climate and weather extremes. This may have also contributed to some of the discrepancy between model results and the subjective ranking of ports that was based on a definition of vulnerability that included all three components (e.g., exposure, sensitivity, and adaptive capacity).

Additionally, indicator-based methods are inherently limited by the availability of data. Chapter 2 of this report, which describes the identification, development, and evaluation of candidate indicators of seaport climate vulnerability, illustrates these data availability limitations in more detail. For example, the lack of openly available data to serve as indicators of adaptive capacity resulted in the reduction of the composite

index described here from an assessment of holistic vulnerability to one of exposure and sensitivity only.

## 5.5 Conclusion

To validate the results of the AHP described in Chapter 4, the AHP-generated weighting scheme was applied using a WSM to create a composite index for 22 CENAD ports that was compared to a subjective ranking of the ports by the same experts. This comparison revealed that while the model is promising in fulfilling the main objective of generating composite indices, the potential for group consensus during the AHP is low. Potentially, implementing Delphi-style iterations can remedy this issue, but it would increase the time cost.

Variations in spatial scale and the given values of available data can require subjective choices regarding the compilation of indicator data for ports that span multiple counties. Because of the sensitivity and subjectivity of these decisions, researchers recommend a stakeholder-based approach for the early stages of indicator development such as the expert-elicitation methods applied in McLeod et al. (2015) and Teck et al. (2010).

This research has furthered the development of indicator-based assessment methods for the port sector by constructing and trialing a prototype composite index of seaport climate vulnerability. However, note that further work exploring the sensitivity of results to data compilation methods and developing a measure of adaptive capacity will be needed before such methods are robust enough for use in critical decision-making. Finally, the main caveat of these methods is that they will always be limited by the quality of the data that they incorporate.

## 6 Conclusion

This study finds that the development of weighted algorithms and composite indices, based on open data, for seaport relative vulnerability to climate and extreme weather can advance the goals of the MTS of the USACE by informing efforts and plans to prioritize and allocate limited resources to increase the climate-resilient seaports. This study also suggests that improvements in the standardized reporting and sharing of port data are necessary before such indicator-based assessment methods can inform decision-makers on the relative vulnerability and the level of resilience inherent to ports that can be used to evaluate port-related investment.

Through science and engineering, the USACE directs efforts to facilitate navigation in U.S. waterways and reduce risks to natural hazards that can impact the sustainability of social, economic, and environmental systems. Seaports are subject to extreme coastal weather and climate impacts, and they will be more vulnerable as these impact frequencies increase in the future. As port decision-makers wrestle with the incertitude of these projected impacts, this research effort attempted to broaden the base of the knowledge that serves to increase the USACE ability to prioritize resources in time by addressing identified gaps in the seaport vulnerability assessment process. This research presents a general method for developing and evaluating an expert-supported vulnerability indicators across a port region. This method can be applied to other fields of study beyond the seaport sector.

Attention must be given to the sufficiency of available open data to serve as vulnerability indicators for the seaport sector. Presently, both exposure and sensitivity can be represented by expert-supported indicators; however, this research was unable to identify available data sources that could yield expert-supported indicators of adaptive capacity. Hence, an opportunity exists for further research and development of standardized, comparative CCVA methods for seaports

**Attention must be given to the sufficiency of available open data to serve as vulnerability indicators for the seaport sector. Presently, the *exposure* and *sensitivity* – vulnerability components – can be represented by expert-supported indicators; however, this research was unable to identify available data sources that could yield expert-supported indicators of adaptive capacity.**

and the MTS, with the objective of supporting Climate Impact, Adaptation, and Vulnerability decisions with information products that allow decision-makers to compare mechanisms and drivers of climate change across multiple ports.

## References

- Adger, W. N., N. Brooks, G. Bentham, M. Agnew, and S. Eriksen. 2004. *New Indicators of Vulnerability and Adaptive Capacity*. Technical Report 7. Tyndall Centre for Climate Change Research. Norway.
- Akompab, D. A., P. Bi, S. Williams, A. Saniotis, I. A. Walker, and M. Augoustinos. 2012. "Engaging Stakeholders in an Adaptation Process: Governance and Institutional Arrangements in Heat-Health Policy Development in Adelaide, Australia." *Mitigation and Adaptation Strategies for Global Change* 18: 1001-1018.
- Alonso, J. A., and M. T. Lamata. 2006. "Consistency in the Analytic Hierarchy Process: A New Approach." *International Journal of Uncertainty, Fuzziness and Knowledge-Based Systems* 14: 445-459.
- Asariotis, R., H. Benamara, and V. Mohos-naray. 2017. *Port Industry Survey on Climate Change Impacts and Adaptation*. UNCTAD Research Paper No. 18. United Nations Conference on Trade and Development.
- Aull-hyde, R., S. Erdogan, and J. M. Duke. 2006. "An Experiment on the Consistency of Aggregated Comparison Matrices in AHP." *European Journal of Operational Research* 171: 290-295.
- Barnett, J., S. Lambert, and I. Fry. 2008. "The Hazards of Indicators: Insights from the Environmental Vulnerability Index." *Annals of the Association of American Geographers* 98: 102-119.
- Becker, A., M. Acciaro, R. Asariotis, E. Cabrera, L. Creteigny, P. Crist, M. Esteban, A. Mather, S. Messner, S. Naruse, A. K. Y. Ng, S. Rahmstorf, M. Savonis, D. W. Song, V. Stenek, and A. F. Velegrakis. 2013. "A Note on Climate Change Adaptation for Seaports: A Challenge for Global Ports, a Challenge for Global Society." *Climatic Change* 120: 683-695.
- Becker, A., D. Newell, M. Fischer, and B. Schwegler. 2011. "Will Ports Become Forts? Climate Change Impacts, Opportunities and Challenges." *Terra et Aqua* 122: 11-17.
- Brooks, N., W. N. Adger, and P. M. Kelly. 2005. "The Determinants of Vulnerability and Adaptive Capacity at the National Level and the Implications for Adaptation." *Global Environmental Change* 15: 151-163.
- Burroughs, R. 2005. "Institutional Change in the Port of New York." *Maritime Policy and Management* 32: 315-328.
- CARRI. 2013. *Definitions of Community Resilience: An Analysis*. A CARRI Report. CARRI (Community and Regional Resilience Institute).
- Chernoff, M. 2017. *What "Open Data" Means—and What It Doesn't*. Red Hat, Inc. Accessed 23 July 2019. <https://opensource.com/government/10/12/what-%22open-data%22-means-%E2%80%93-and-what-it-doesn%E2%80%99t>

- Chhetri, P., J. Corcoran, V. Gekara, C. Maddox, and D. McEvoy 2014. "Seaport Resilience to Climate Change: Mapping Vulnerability to Sea-Level Rise." *Journal of Spatial Science* 60(1): 65-78.
- Committee on the Marine Transportation System Research and Development Integrated Action Team (CMTS). 2015. *Marine Transportation System Performance Measures: Executive Summary*. 1200 New Jersey Ave SE. Washington, D.C. 20590: U.S. Committee on the Marine Transportation System, Research and Development Integrated Action Team.
- Cox, R. J., K. Panayotou, and R. M. Cornwell. 2013. *Climate Risk Assessment for Avatiu Port and Connected Infrastructure*. Water Research Lab, University of New South Wales.
- Cutter, S. L. 1996a. "Societal Responses to Environmental Hazards." *International Social Science Journal* 48: 525-536.
- Cutter, S. L. 1996b. "Vulnerability to Environmental Hazards." *Progress in Human Geography* 20: 529-539.
- Cutter, S. L., L. Barnes, M. Berry, C. Burton, E. Evans, E. Tate, and J. Webb. 2008. "A Place-Based Model for Understanding Community Resilience to Natural Disasters." *Global Environmental Change* 18: 598-606.
- Cutter, S. L., B. J. Boruff, and W. L. Shirley. 2003. "Social Vulnerability to Environmental Hazards." *Social Science Quarterly* 84: 242-261.
- Cutter, S. L., C. G. Burton, and C. T. Emrich. 2010. "Disaster Resilience Indicators for Benchmarking Baseline Conditions." *Journal of Homeland Security and Emergency Management* 7.
- Dedeke, N. 2013. "Estimating the Weights of a Composite Index Using AHP: Case of the Environmental Performance Index." *British Journal of Arts and Social Sciences* 11: 199-221.
- Delbecq, A. L., A. H. Van de Ven, and D. H. Gustafson. 1975. *Group Techniques for Program Planning: A Guide to Nominal Group and Delphi Processes*. Glenview, IL: Scott-Foresman Company.
- ESPO. 2012. Project Executive report (PPRISM WP4 D4.2). *PPRISM: Port Performance Indicators : Selection and Measurement*. European Sea Ports Organization.
- European Seaports Organization (ESPO). 2010. Work Package 1 (WP1): "Pre-Selection of an Initial Set of Indicators." *PPRISM: Port Performance Indicators : Selection and Measurement*. European Sea Ports Organization.
- Gallopin, G. C. 1997. "Indicators and Their Use: Information for Decision-Making." *Sustainability Indicators. A Report on the Project on Indicators of Sustainable Development*. Edited by B. Boldan and S. Bilharz. Wiley, Chichester: SCOPE.

- Goepel, K. D. 2013. "Implementing the Analytic Hierarchy Process as a Standard Method for Multi-Criteria Decision Making in Corporate Enterprises—A New AHP Excel Template with Multiple Inputs." *Proceedings of the International Symposium on the Analytic Hierarchy Process*, 2013, 1-10. Kuala Lumpur: Creative Decisions Foundation.
- Goepel, K. D. 2017. *AHP Online System - BPMSG*. <https://bpmsg.com/academic/ahp.php>
- Gómez-Limón, J. A., and L. Riesgo. 2009. "Alternative Approaches to the Construction of a Composite Indicator of Agricultural Sustainability: An Application to Irrigated Agriculture in the Duero basin in Spain." *Journal of Environmental Management* 90: 3345-3362.
- Hanson, S., R. Nicholls, N. Ranger, S. Hallegatte, J. Corfee-Morlot, C. Herweijer, and J. Chateau. 2010. "A Global Ranking of Port Cities with High Exposure to Climate Extremes." *Climatic Change* 104: 89-111.
- Hasson, F., S. Keeney, and H. McKenna. 2000. "Research Guidelines for the Delphi Survey Technique." *Journal of Advanced Nursing* 32: 1008-1015.
- Hategekimana, Y., L. Yu, Y. Nie, J. Zhu, F. Liu, and F. Guo. 2018. "Integration Of Multi-Parametric Fuzzy Analytic Hierarchy Process and GIS along the UNESCO World Heritage: A Flood Hazard Index, Mombasa County, Kenya." *Natural Hazards* (2018) 92: 1137-1153.
- Haveman, J. D., and H. J. Shatz. 2006. *Protecting the Nation's Seaports: Balancing Security and Cost*. Public Policy Institute of California San Francisco.
- Hinkel, J. 2011. "Indicators of Vulnerability and Adaptive Capacity: Towards a Clarification of the Science-Policy Interface." *Global Environmental Change-Human and Policy Dimensions* 21: 198-208.
- Hovanov, N. V., J. W. Kolari, and M. V. Sokolov. 2008. "Deriving Weights from General Pairwise Comparison Matrices." *Mathematical Social Sciences* 55: 205-220.
- International Maritime Organization (IMO). 2012. *International Shipping Facts and Figures – Information Resources on Trade, Safety, Security, Environment*. Maritime Knowledge Centre: International Maritime Organization. <https://www.slideshare.net/calemolech/international-shipping-facts-and-figures>
- IPCC (Intergovernmental Panel on Climate Change). 2001. *Climate Change 2001: Impacts, Adaptation, and Vulnerability: Contribution of Working Group II to the Third Assessment Report of the Intergovernmental Panel on Climate Change*. Intergovernmental Panel on Climate Change. Cambridge: Cambridge University Press.
- IPCC. 2012. *Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation: Special Report of the Intergovernmental Panel on Climate Change (SREX)*. Edited by C. B. Field, V. Barros, T. F. Stocker, D. Qin, D. J. Dokken, K. L. Ebi, M. D. Mastrandrea, K. J. Mach, G.-K. Plattner, S. K. Allen, M. Tignor, and P. M. Midgley. Cambridge: Cambridge University Press.



- IPCC. 2013. "Climate Change 2013: The Physical Science Basis: Working Group I Contribution to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change." *Fifth Assessment Report of the Intergovernmental Panel on Climate Change*. Edited by Stocker, T., D. Qin, G.-K. Plattner, M. Tignor, S. K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex, and P. M. Midgley. Cambridge, UK; New York, NY, USA: Intergovernmental Panel on Climate Change.
- IPCC. 2014a. "Climate Change 2014: Impacts, Adaptation, and Vulnerability. Part A: Global and Sectoral Aspects. Contribution of Working Group II to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change." *Fifth Assessment Report of the Intergovernmental Panel on Climate Change*. Cambridge University Press: United Kingdom and New York, NY, USA: Intergovernmental Panel on Climate Change.
- IPCC. 2014b. "WGII AR5 Glossary." *Fifth Assessment Report of the Intergovernmental Panel on Climate Change*. Climate Change 2014: Impacts, Adaptation, and Vulnerability. Contribution of Working Group II to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change. Cambridge: Cambridge University Press.
- Ishizaka, A., and A. Labib. 2011. "Review of the Main Developments in the Analytic Hierarchy Process." *Expert Systems with Applications* 38: 14336-14345.
- Janssen, M., Y. Charalabidis, and A. Zuiderwijk. 2012. "Benefits, Adoption Barriers and Myths of Open Data and Open Government." *Information Systems Management* 29: 258-268.
- Kainulainen, T., P. Leskinen, P. Korhonen, A. Haara, and T. Hujala. 2009. "A Statistical Approach to Assessing Interval Scale Preferences in Discrete Choice Problems." *Journal of the Operational Research Society* 60: 252-258.
- Keeney, S., F. Hassonand, and H. McKenna. 2006. "Consulting the Oracle: Ten Lessons from Using the Delphi Technique in Nursing Research." *Journal of Advanced Nursing* 53: 205-212.
- Kim, Y., and E.-S. Chung. 2013. "Assessing Climate Change Vulnerability with Group Multi-Criteria Decision Making Approaches." *Climatic Change* 121: 301-315.
- Klein, R. J., R. J. Nicholls, and F. Thomalla. 2003. "Resilience to Natural Hazards: How Useful Is This Concept?" *Global Environmental Change Part B: Environmental Hazards* 5: 35-45.
- Koppe, B., M. Schmidt, and T. Strotmann. 2012. "IAPH-Report on Seaports and Climate Change and Implementation Case Study for the Port of Hamburg." *The 6th Chinese-German Joint Symposium on Hydraulic and Ocean Engineering* (JOINT 2012) National Taiwan Ocean University Keelung, 23(26.9): S401-414.
- Kuo, Y.-F., and P.-C. Chen. 2008. "Constructing Performance Appraisal Indicators for Mobility of the Service Industries Using Fuzzy Delphi Method." *Expert Systems with Applications* 35: 1930-1939.
- Larson, R. 2016. *Elementary Linear Algebra*, 8<sup>th</sup> Edition. Boston, MA: Cengage Learning.

- Likert, R. 1932. "A Technique for the Measurement of Attitudes." *Archives of Psychology* 140: 5-55.
- Lloyds, L. 2017. *Lloyds List Top 100 Ports*. London, UK: Informa UK Ltd.
- Mansouri, M., R. Nilchiani, and A. Mostashari. 2010. "A Policy Making Framework for Resilient Port Infrastructure Systems." *Marine Policy* 34: 1125-1134.
- Marine Administration (MARAD). 2016. *Marine Transportation System (MTS)*. Washington, DC: Maritime Administration. Accessed May 25, 2016. <https://www.maritime.dot.gov/outreach/maritime-transportation-system-mts/maritime-transportation-system-mts>
- McIntosh, R. D. 2018. *Expert Evaluation of Open-Data Indicators of Seaport Vulnerability to Climate and Extreme Weather for U.S. North Atlantic Ports*. PhD dissertation. University of Rhode Island.
- McIntosh, R. D., and A. Becker. 2017. "Seaport Climate Vulnerability Assessment at the Multi-port Scale: A Review of Approaches." *Resilience and Risk: Methods and Application in Environment, Cyber and Social Domains*. Edited by I. Linkov and J. M. Palma-Oliveira. Dordrecht: Springer Netherlands.
- McLean, E. L., and A. Becker. 2019. *Measuring Climate and Extreme Weather Vulnerability to Inform Resilience: Report 2: Port Decision-Makers' Barriers to Climate and Extreme Weather Adaptation*. ERDC/CHL CR-19-3. Vicksburg, MS: U.S. Army Engineer Research and Development Center.
- McLeod, E., B. Szuster, E. L. Tompkins, N. Marshall, T. Downing, S. Wongbusarakum, A. Patwardhan, M. Hamza, C. Anderson, and S. Bharwani. 2015. "Using Expert Knowledge to Develop a Vulnerability and Adaptation Framework and Methodology for Application in Tropical Island Communities." *Coastal Management* 43: 365-382.
- Melillo, J. M., T. T. C. Richmond, and G. W. Yohe. 2014. "Climate Change Impacts in the United States." *The Third National Climate Assessment*. U.S. Global Change Research Program.
- Messner, S., L. Moran, G. Reub, and J. Campbell. 2013. *Climate Change and Sea Level Rise Impacts at Ports and a Consistent Methodology to Evaluate Vulnerability and Risk*. ENVIRON International Corp.
- Mindmapping.com. 2017. *What is a Mind Map?* Accessed 21 June 2017. <http://www.mindmapping.com/mind-map.php>
- Morris, L. L., and T. Sempier. 2016. *Ports Resilience Index: A Port Management Self-Assessment*. U.S. Department of Commerce, Gulf of Mexico Alliance.
- NGIA (National Geospatial-Intelligence Agency). 2015. *World Port Index - 150 Pub. - Twenty-Fourth Edition*. Springfield, VA: National Geospatial-Intelligence Agency.

- Nicholls, R. J., S. Hanson, C. Herweijer, N. Patmore, S. Hallegatte, J. Corfee-Morlot, J. Château, and R. Muir-Wood. 2008. "Ranking Port Cities with High Exposure and Vulnerability to Climate Extremes: Exposure Estimates." *OECD Environment Working Papers*. Organization for Economic Cooperation and Development. Paris: OCED Publishing.
- NOAA (National Oceanic and Atmospheric Administration). 2015. *Port Tomorrow: Port Resilience Planning Tool [Prototype]*. National Oceanic and Atmospheric Administration - Office for Coastal Management. Accessed 3 April 2015. <http://www.coast.noaa.gov/port/>
- NRC (National Research Council). 2009. *Informing Decisions in a Changing Climate, in Panel on Strategies and Methods for Climate-related Decision Support*. Executive Summary. Committee on the Human Dimensions for Global Change, Division of Behavioral Sciences and Education: Washington, DC, USA.
- Okoli, C., and S. D. Pawlowski. 2004. "The Delphi Method as a Research Tool: An Example, Design Considerations and Applications." *Information and Management* 42: 15-29.
- Orencio, P. M., and M. Fujii. 2013. "A Localized Disaster-Resilience Index to Assess Coastal Communities Based on an Analytic Hierarchy Process (AHP)." *International Journal of Disaster Risk Reduction* 3: 62-75.
- Peris-Mora, E., J. M. Diez Orejas, A. Subirats, S. Ibanez, and P. Alvarez. 2005. "Development of a System of Indicators for Sustainable Port Management." *Mar Pollut Bull* 50: 1649-60.
- Preston, B. 2012. *Climate Change Vulnerability Assessment: From Conceptual Frameworks to Practical Heuristics*. Working Paper 16. CSIRO Climate Adaptation Flagship Working paper.
- Pticina, I., and I. Yatskiv. 2015. "Weighting the Urban Public Transport System Quality Index (UPTQI) Using the Analytical Hierarchy Process." *International Journal of Society Systems Science* 7: 107-126.
- Ramanathan, R., and L. Ganesh. 1994. "Group Preference Aggregation Methods Employed in AHP: An Evaluation and an Intrinsic Process for Deriving Members' Weightages." *European Journal of Operational Research* 79: 249-265.
- Rice, J. C., and M.J. Rochet. 2005. "A Framework for Selecting a Suite of Indicators for Fisheries Management." *ICES Journal of Marine Science* 62: 516-527.
- Roos, E. C., and F. J. Kliemann Neto. 2017. "Tools for Evaluating Environmental Performance at Brazilian Public Ports: Analysis and Proposal." *Mar Pollut Bull* 115: 211-216.
- Rosati, J. D., K.F. Touzinsky, and W. J. Lillycrop. 2015. "Quantifying Coastal System Resilience for the US Army Corps of Engineers." *Environment, Systems, and Decisions* 35: 196-208.
- Saaty, T. L. 1977. "A Scaling Method for Priorities in Hierarchical Structures." *Journal of Mathematical Psychology* 15: 234-281.

- Saaty, T. L. 1990a. "An Exposition of the AHP in Reply to the Paper 'Remarks on the Analytic Hierarchy Process.'" *Management Science* 36: 259-268.
- Saaty, T. L. 1990b. "How to Make a Decision: The Analytic Hierarchy Process." *European Journal of Operational Research* 48: 9-26.
- Saaty, T. L. 2006. "Rank from Comparisons and from Ratings in the Analytic Hierarchy/Network Processes." *European Journal of Operational Research* 168: 557-570.
- Saaty, T. L. 2008a. "Decision Making with the Analytic Hierarchy Process." *International Journal of Services Sciences* 1: 83-98.
- Saaty, T. L. 2008b. "Relative Measurement and Its Generalization in Decision Making Why Pairwise Comparisons are Central in Mathematics for the Measurement of Intangible Factors the Analytic Hierarchy/Network Process." *RACSAM-Revista de la Real Academia de Ciencias Exactas, Fisicas y Naturales. Serie A. Matematicas* 102: 251-318.
- Sagar, A. D., and A. Najam. 1998. "The Human Development Index: A Critical Review1." *Ecological Economics* 25: 249-264.
- Schroth, O., E. Pond, and S. R. Sheppard. 2011. "Integration of Spatial Outputs from Mathematical Models in Climate Change Visioning Tools for Community-Decision Making on the Landscape Scale." *DLA-Digital Landscape Architecture* 246-255.
- Schultz, M. T., and E. R. Smith. 2016. "Assessing the Resilience of Coastal Systems: A Probabilistic Approach." *Journal of Coastal Research* 321: 1032-1050.
- Scott, H., D. McEnvoy, P. Chhetri, F. Basic, and J. Mullet. 2013. *Climate Change Adaptation Guidelines for Ports: Report Series: Enhancing the Resilience of Seaports to a Changing Climate*. National Climate Change Adaptation Research Facility. Gold Coast.
- Seijger, C., J. van Tatenhove, G. Dewulf, and H. S. Otter. 2014. "Responding to Coastal Problems: Interactive Knowledge Development in a US Nature Restoration Project." *Ocean and Coastal Management* 89: 29-38.
- Sempier, T. T., D. L. Swann, R. Emmer, S. H. Sempier, and M. Schneider. 2010. *Coastal Community Resilience Index: A Community Self-Assessment*. Mississippi-Alabama Sea Grant Consortium.
- Siders, A. 2016. "Incoherent Resilience -- Towards a Common Language for Climate Change Adaptation." *The Role of International Environmental Law in Disaster Risk Reduction*. Edited by J. Peel and D. Fisher, 101-126. Brill Hiihoff. [https://doi.org/10.1163/9789004318816\\_006](https://doi.org/10.1163/9789004318816_006)
- Stenek, V., J.-C. Amado, R. Connell, O. Palin, S. Wright, B. Pope, J. Hunter, J. McGregor, W. Morgan, and B. Stanley. 2011. *Climate Risk and Business: Ports: Terminal Marítimo Muelles el Bosque*. International Finance Corporation.
- Talley, W. K. 2009. *Port Economics*. NY: Routledge.

- Teck, S. J., B. S. Halpern, C. V. Kappel, F. Micheli, K. A. Selkoe, C. M. Crain, R. Martone, C. Shearer, J. Arvai, and B. Fischhoff. 2010. "Using Expert Judgment to Estimate Marine Ecosystem Vulnerability in the California Current." *Ecological Applications* 20: 1402-1416.
- Touzinsky, K. L. Knapp, A. Renaud. 2018. "An Interagency Collaboration to Identify Federal Resilience Factors for the U.S. Marine Transportation System." ERDC/CHL CHETN-VI-48. U.S. Army Corps of Engineers, Vicksburg, MS.
- USACE (U.S. Army Corps of Engineers). 2019. *USACE Civil Works Division Boundaries*. <https://catalog.data.gov/dataset/usace-civil-works-divisions>
- USDOT (U.S. Department of Transportation). 2014. "Impacts of Climate Change and Variability on Transportation Systems and Infrastructure The Gulf Coast Study, Phase 2 Screening for Vulnerability Final Report, Task 3.1." FHWA-HEP-14-033. Edited by ICF International. Washington, DC: U.S. Department of Transportation.
- White, D. D., A. Wutich, K. L. Larson, P. Gober, T. Lant, and C. Senneville. 2010. "Credibility, Salience, and Legitimacy of Boundary Objects: Water Managers' Assessment of a Simulation Model in an Immersive Decision Theater." *Science and Public Policy* 37: 219-232.
- Yodo, N., and P. Wang. 2016. "Engineering Resilience Quantification and System Design Implications: A Literature Survey." *Journal of Mechanical Design* 138(11): 111408-1 to 11408-13.

## Appendix A: Terminology Definitions

*Analytic Hierarchy Process (AHP)* is a multi-objective, multi-criteria decision-making approach that uses a pairwise comparison procedure to arrive at a scale of preference among a set of alternatives (Saaty 2008b).

*Indicators* are measurable, observable quantities that serve as proxies for an aspect of a system that cannot itself be directly measured (Gallopini 1997; Hinkel 2011).

*Mind map*© is “an organized diagram that allows you to visually structure your ideas to help with analysis and recall. Concepts can be linked to and arranged around a central concept or subject using a non-linear graphical layout that allows the user to build an intuitive framework around a central concept” (Mindmap.com 2017).

*Open-data source* is information that is “released in a specific way to allow the public to access” (Chernoff 2017). These data are fully discoverable and usable by end users. Some valuable data are not accessible owing to the sensitive nature of the information.

*Resilience* is the capacity to prepare, resist, recover, and adapt to a disturbance, such as a major storm event (CARRI 2013; Rosati et al. 2015) and is a concept that in and of itself is not directly measurable.

*Risk* is the probability of an event to damage critical components of the infrastructure. Although potential outcomes are often uncertain (IPCC 2014a), these are often measured monetarily as it relates to the physical components of a facility/system, loss of function (interruptions), cost of repair and stabilizing conditions (debris removal, etc.).

*Seaport* here collectively refers to the collocated real property and infrastructure involved in the loading and unloading of cargo from maritime vessels. These are port, facilities, locks, etc. Lacking a universally accepted method for delimiting for port boundaries, and recognizing that some seaports span multiple counties, this study of port vulnerability considers a port as an inextricable part of its local socioeconomic and environmental systems.

## Appendix B: Mind maps<sup>®</sup> from Expert Group

Figure B-1. Mind map of the components of vulnerability for seaports: Exposure.


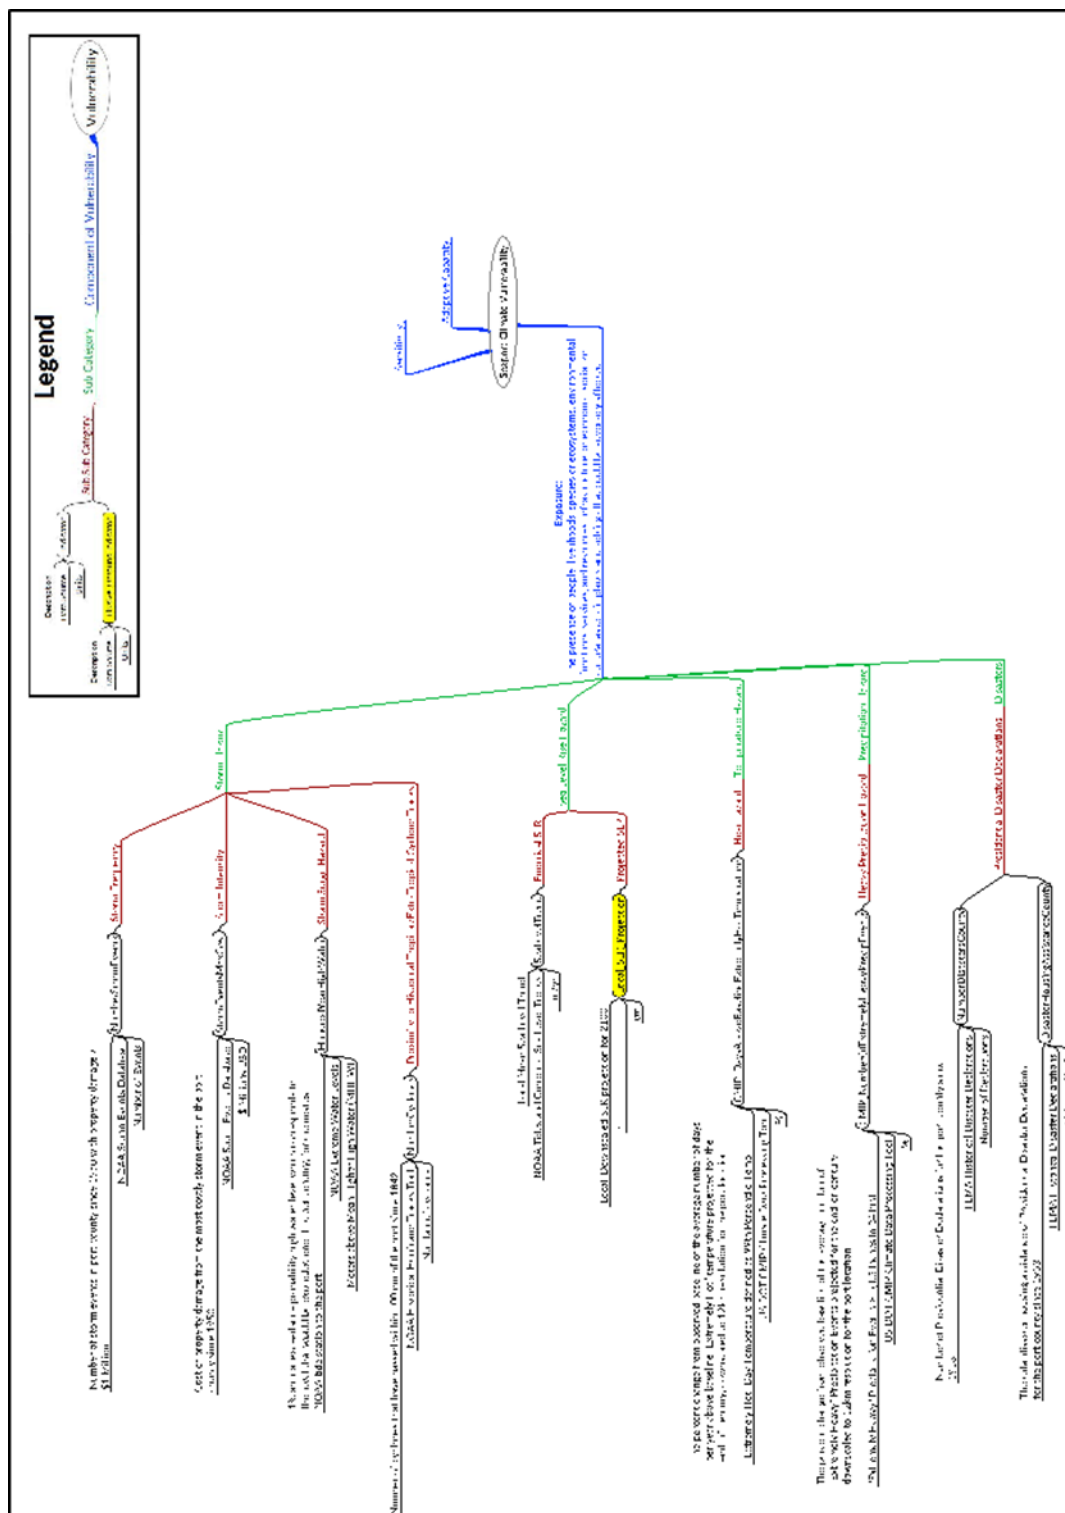


Figure B-2. Mind map of the components of vulnerability for seaports: Sensitivity.





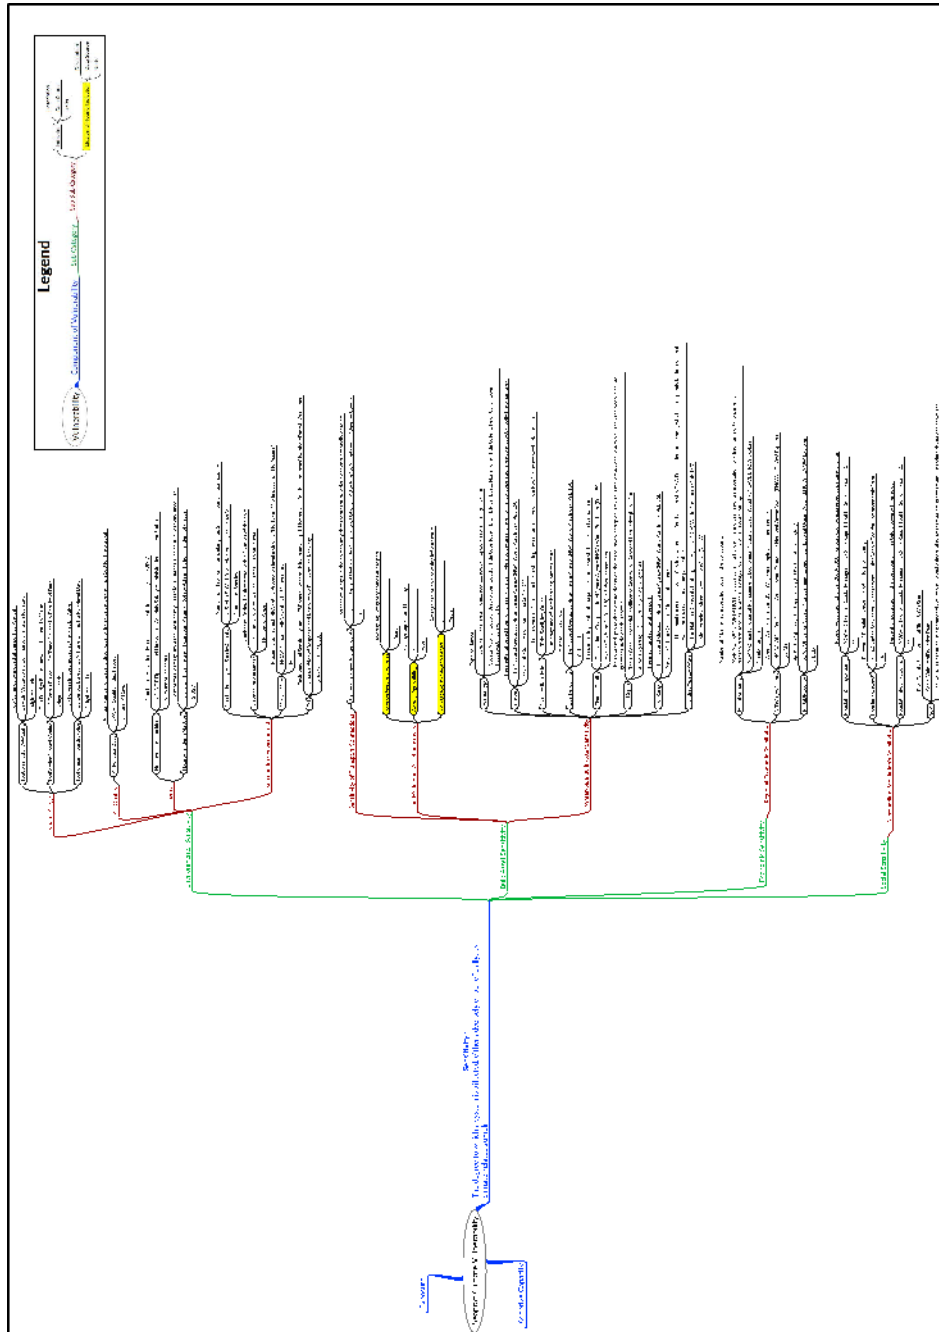

## Appendix C: Databases for Candidate Vulnerability Indicators

Table C-1. Twenty extreme weather vulnerability indicator database sources, time range for the data, 48 numbered candidate indicators and its corresponding unit of measurement. A full list of all the identified databases and indicators are presented in [URI – Digital Commons](#).

Data Sources	Time Range	Candidate Indicators (#1-48)	Units
1. NOAA Storm Events Database	1950 - 2016	1.1 Number Storm Events (1)	Number of Events
	1950 - 2016	1.2 Storm Events Max Cost (2)	\$ Millions USD
	1950 - 2016	1.3 Average Cost of Storm Event (3)	\$ USD
2. NOAA Extreme Water Levels	1893 - Present	2.1 Hundred Year High Water (4)	Meters above mean higher high water (MHHW)
	1893 - Present	2.2 Hundred Year Low Water (5)	Meters below mean lower low water (MLLW)
3. NOAA Historical Hurricane Tracks Tool	1842 - Present	3.1 Number Cyclones (6)	Number of cyclones
4. NOAA Tides and Currents- Sea Level Trends	1854 - 2013	4.1 Sea Level Trend (7)	mm/yr
5. NOAA Office of Response and Restoration: ESI Shoreline Rankings	2001 - 2016	5.1 Environmental Sensitivity Index (ESI) (8)	ESI Rank (1.00 - 10.83)
6. NOAA Office for Coastal Management: Economics: National Ocean Watch – Economic National Ocean Watch: ENOW Explorer	2005 - 2013	6.1 MT Jobs County (9)	Number of jobs
	2005 – 2013	6.2 Marine Transportation Jobs (MT) Gross Domestic product (GDP) County (10)	\$ USD

Data Sources	Time Range	Candidate Indicators (#1-48)	Units
	2005 - 2013	6.3 MT Wages County (11)	\$ USD
7. NOAA Office for Coastal Management: Quick Report Tool for Socioeconomic Data	2000 - 2010	7.1 Population Change County (12)	%
8. NOAA Office for Coastal Management: County Snap shot		8.1 Population Inside Floodplain (13)	%
		8.2 Population Poverty County (14)	%
		8.3 Population Over 65 (15)	&
9. NOAA National Marine Protected Area (MPA) Center	2002-2005	9.1 Miles to MPA (16)	Miles
10. EPA Air Quality Index Report	1980 - 2016	10.1 Air Pollution Days (17)	Number of Days
11. FEMA Historical Disaster Declarations	1953 - Present	11.1 Number Disasters County (18)	Number of Declarations (Type)
		11.2 Disaster Housing Assistance County (19)	\$ Millions of USD
12. US DOT Coupled Model Inter-comparison Project (CMIP) Climate Data Processing Tool	1953 - Present	12.1 Projected Change in Days Above Baseline Extremely Hot Temperature (20)	%
	1954 - Present	12.2 Number of Extremely Heavy Precipitation Events (21)	%

Data Sources	Time Range	Candidate Indicators (#1-48)	Units
13. U.S. DOT Pipeline and Hazardous Materials Safety Administration: Incident Statistics	2007 - 2012	13.1 Number Hazmat Incidents (22)	Number of Incidents
	2007 - 2012	13.2 Hazmat Incidents Max Cost (23)	\$ USD
14. U.S. DOT Federal Highway Administration: National Bridge Inventory: Deficient Bridges by County	2006 - 2016	14.1 Percent Deficient Bridges County (24)	%
15. U.S. DOT Maritime Administration, Vessel Calls at U.S. Ports by Vessel Type	Annual 2002 - 2017	15.1 Tanker Capacity (25)	(Number of calls) x vessel dead weight total (DWT) (metric tons)
	Annual 2002 - 2017	15.2 Tanker Calls (26)	Ship calls
	Annual 2002 - 2017	15.3 Container Capacity (27)	(Number of calls) x vessel dead weight total (DWT)
	Annual 2002 - 2017	15.4 Container Calls (28)	Ship calls
	Annual 2002 - 2017	15.5 Gas carrier Capacity (29)	(Number of calls) x vessel dead weight total (DWT)
	Annual 2002 - 2017	15.6 Gas Calls (30)	Ship calls
	Annual 2002 - 2017	15.7 Vessel Capacity (31)	(Number of calls) x vessel DWT
	Annual 2002 - 2017	15.8 Vessel Calls (32)	Ship Calls

Data Sources	Time Range	Candidate Indicators (#1-48)	Units
16. The National Geospatial-Intelligence Agency (NGA) World Port Index (Pub 150)	2016	16.1 Shelter Afforded (33)	Excellent, Good, Fair, Poor, None (5,4,3,2,1)
	2016	16.2 Entrance Restrictions (34)	Tide, Swell, Ice, Other
	2016	16.3 Overhead Limits (35)	Y=1, N=0
	2016	16.4 Channel Depth (36)	A (over 76 ft) to Q (0 – 5 ft) in 5 ft increments
	2016	16.5 Pier Depth (37)	A (over 76 ft) to Q (0 – 5 ft) in 5 ft increments
	2016	16.6 Tide Range (38)	Feet
	2016	16.7 Harbor Size (39)	Large, Medium, Small, Very Small
	2016	16.8 Harbor Type (40)	Coastal natural, Coastal breakwater, Coastal tide gate, River basis, None, River, River tide gate, Lake or canal, Open roadstead, Typhoon harbor
17. USACE Navigation Data Center: Principal Ports of the United States	1996 – 2015	17.1 Tonnage (43)	Short Tons
	1996 – 2015	17.2 Domestic (44)	Tons
	1996 – 2015	17.3 Foreign (45)	Tons

Data Sources	Time Range	Candidate Indicators (#1-48)	Units
	1996 – 2015	17.4 Imports (46)	Tons
	1996 – 2015	17.5 Exports (47)	Tons
18. U.S. Fish and Wildlife Service, Endangered Species	Present Year	18.1 Number Endangered Species County (41)	Number of Species
19. U.S. Fish and Wildlife Service, Critical Habitat Portal	Present Year	19.1 Number Critical Habitat (42)	Number of Areas
20. Social Vulnerability Index Data	2006 – 2010	20.1 SoVI (48)	The SoVI is classified using standard deviations

## Appendix D: Other Identified Datasets

Table D-1. List of datasets that contain potential candidate indicators for vulnerability, but the datasets did not contain information for at least 12 of the 22 ports in this pilot study. They are included here to note that they were considered for this study, but rejected for the pilot. The datasets are presented with their source, time range for which data are available, the candidate indicator(s), and the units in which these are recorded.

Data Sources	Time Range	Candidate Indicators	Units
NOAA Storm Events Database	1950 - 2016	Non-convective high winds	Knots
NOAA – Tides and Currents: Top Ten Highest Water Levels for long-term stations	2015 (annual, latest available)	Highest historical water level	Meters above MHHW
SurgeDAT	2012 (annual, latest available)	Max historical storm surge	Meters
National Hurricane Center	2014 (annual, latest available)	Tropical cyclone return period	Years
Global Sea Level Rise (SLR) Scenarios for the United States: National Climate Assessment	2012 (annual, latest available)	Local SLR Projections	mm / yr
Permanent Service for Mean Sea Level (PSMSL) Peltier GIA data sets	2012 (annual, latest available)	Annual uplift/subsidence rate	mm / yr
NOAA National Centers for Environmental Information NCDC	2014 (annual, latest available)	Average Annual Sea Surface Temp Anomaly	°F
NOAA National Estuaries Research Reserve System	2014 (annual, latest available)	Nearby Federally/State Managed Water	Acres
U.S. Fish and Wildlife Refugees	2014 (annual, latest available)	Nearby Wildlife Refugees	Acres
EPA Cleanups in My Community	2015 (annual, latest available)	EPA Brownfields near port	Number of sites

Data Sources	Time Range	Candidate Indicators	Units
FEMA National Flood Insurance Program Community Rating System: Communities and Their Classes	2015 (annual, latest available)	National Flood Insurance Program Community Rating System Score	Score number
Texas A&M University Texas Transportation Institute Urban Mobility Information, Congestion Data for Your City	2011 (annual, latest available)	Annual Truck Congestion Cost	Millions (\$)
		Roadway Congestion Index	Unit-less
	2011 (annual, latest available)	Travel Time Index	Unit-less
North American Cruise Traffic	2013-2014	Cruise-Ship Calls	Ship calls
	2013-2014	Cruise-Ship Passengers	Passengers
Western Hemisphere Port TEU Container Volumes	1980-2013	Containerized Throughput	Twenty-foot equivalent units (TEU)
USA Trade Online: HS Port-level Data	2016 (annual, latest available)	Top Foreign Import by Value	6 digits Harmonized system commodity code (HS code)
		Top Foreign Import by Weight	6 digits HS code
		Top Foreign Export by Value	6 digits HS code
		Top Foreign Export by Weight	6 digits HS code
USACE Navigation Data Center: Principal Ports of the U.S.	2016 (latest)	Annual % change in throughput	%



## Appendix E: List of Databases Used and Brief Descriptions

### I. National Oceanic and Atmospheric Administration (NOAA)


#### 1. NOAA Storm Events Database

Source: <https://www.ncdc.noaa.gov/stormevents/>

The Storm Events Database contains the records used to create the official NOAA storm data publication, documenting the following:

- a. The occurrence of storms and other significant weather phenomena with sufficient intensity to cause loss of life, injuries, significant property damage, and/or disruption to commerce
- b. Rare, unusual, weather phenomena that generate media attention, such as snow flurries in South Florida or the San Diego coastal area
- c. Other significant meteorological events, such as record maximum or minimum temperatures or precipitation that occur about another event (Figure E-1).

Figure E-1. Examples of event types from NOAA storm event database.

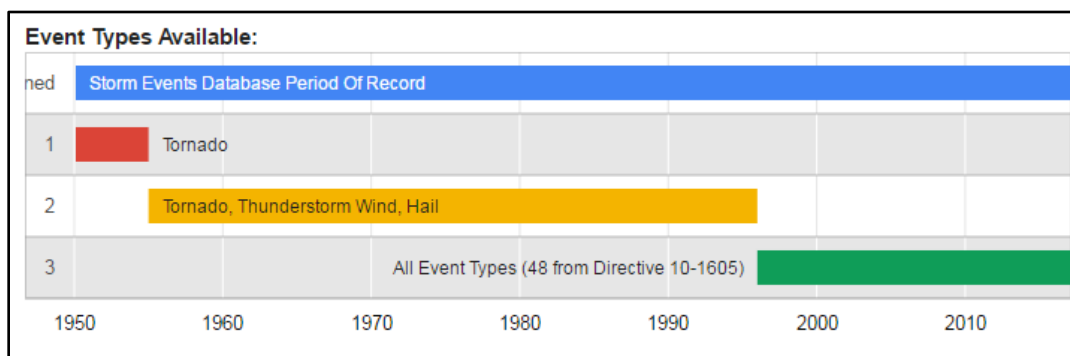

The database currently contains data from January 1950 to February 2017, as entered by the NOAA National Weather Service. Due to changes in the data collection and processing procedures over time, there are unique periods of record available depending on the event type. The National Centers for Environmental Information has performed data reformatting and standardization of event types but has not changed any data values for locations, fatalities, injuries, damage, narratives, and any

other event-specific information. Please refer to the database details page for further information.

Candidate indicators found in this database are the following:

1.1 Number of storm events (1)

1.2 Max. Cost of storm event (2)

1.3 Average Cost of Storm Event (3)

## 2. NOAA Extreme Water Levels

Source: <https://tidesandcurrents.noaa.gov/est/northatlantic.html>

The extreme water levels product provides web-based access to exceedance probability statistics to approximately 110 NOAA Center for Operational Oceanographic Products and Services (CO-OPS) water level stations with at least 30 years of water level observations. Exceedance probability is the likelihood that water levels will exceed a given elevation based on a statistical analysis of historic observations. CO-OPS computes exceedance probability statistics to determine the extreme water levels that are likely to occur every year, every other year, every 10 years, and every 100 years (Figure E-2).


Extremely high or low water levels at coastal locations are an important public concern and a factor in coastal hazard assessment, navigational safety, and ecosystem management. Exceedance probability, the likelihood that water levels will exceed a given elevation, is based on a statistical analysis of historic values.

Candidate indicators found in this database are the following:

2.1 Hundred Year High Water (4)

2.2 Hundred Year Low Water (5)

Figure E-2. Comparison of 10- and 100-year exceedance from NOAA database.  
Probability levels: meters above mean MHHW by locality.

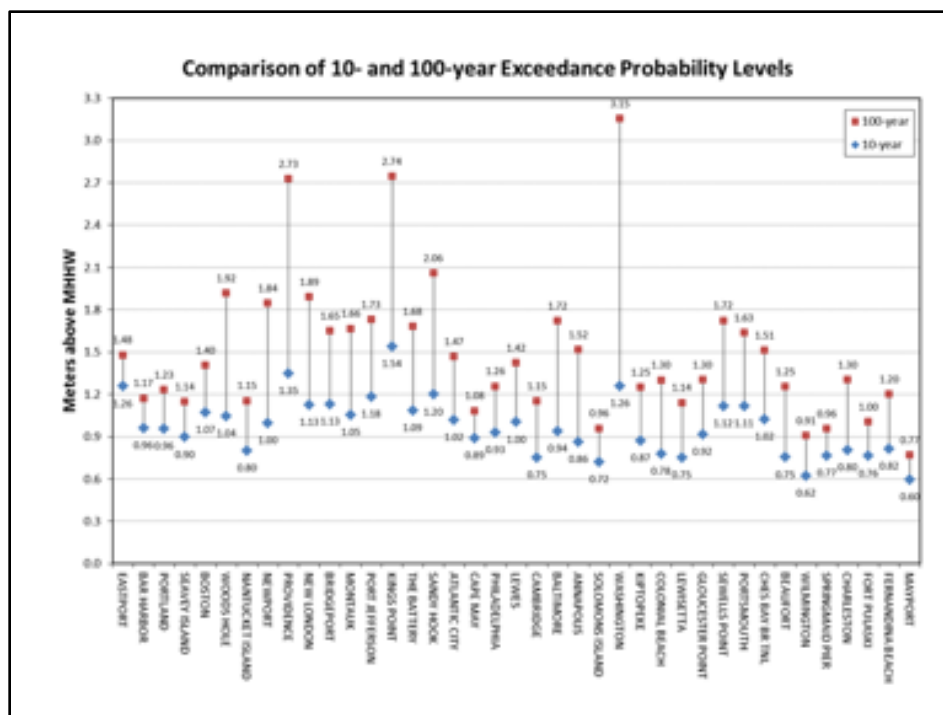

### 3. NOAA Historical Tracks Tool

Source: <https://coast.noaa.gov/hurricanes/>

Storm track information is available from 1842 through the previous year's storms (e.g., 2016). This data service is for the tiled image of all tropical storms, it serves as an overlay within web maps. Although this imagery is available as a data service, most users will find the actual *Historical Hurricane Tracks* website to be more useful for finding and displaying storm information. Within that tool, users can search for a storm by name, time, or location. The actual storm track data are from the NOAA National Climatic Data Center's International Best Track Archive for Climate Stewardship data set and the NOAA National Weather Service Hurricane data set (HURDAT2).

Candidate indicator found in this database is the following:

#### 3.1 Number of Cyclones (6)

#### 4. NOAA Tides and Current

Source: <https://tidesandcurrents.noaa.gov/sltrends/sltrends.html>

The CO-OPS has measured sea level for over 150 years, with tide stations of the *national water level observation network* operating on all U.S. coasts. Changes in Mean Sea Level, either a sea level rise or sea level fall, are computed at 142 long-term water level stations using a minimum span of 30 years of observations at each location. These measurements are averaged by month to remove the effect of higher frequency phenomena to compute an accurate linear sea level trend.

Candidate indicator found in this database is the following:

##### 4.1 Sea Level Trend (7)

#### 5. NOAA Office of Response and Restoration (OR&R)

Source: <http://response.restoration.noaa.gov/maps-and-spatial-data/shoreline-rankings.html>

The history of the OR&R began in 1976 with grounding of the tanker Argo Merchant near Nantucket shoals in Massachusetts. Lessons learned from that incident led to the development of oil and chemical spill emergency response, as it is known today. The OR&R is comprised of three divisions: (1) Emergency response, (2) Assessment and restoration, and (3) Marine debris. Collectively, the OR&R provides comprehensive solutions to environmental hazards caused by oil, chemicals, and marine debris.

Candidate indicator found in this database is the following:

##### 5.1 Environmental *Sensitivity* Index (ESI) (8)

#### 6. NOAA - Office for Coastal Management (OCM)

Source: <https://coast.noaa.gov/digitalcoast/tools/enow.html>

This online tool provides easy access to economic and demographic data for multiple coastal jurisdictions. After selecting the information, geography, and period of interest, users can download data. Information is derived from several key socioeconomic sources, including the U.S. Census

Bureau, Bureau of Economic Analysis, Bureau of Labor Statistics, and the FEMA Hazus database.

In 2010, 123.3 million people, or 39% of the nation's population lived in Coastal Shoreline Counties. Population growth in these counties occurred at a lower rate than the nation as a whole from 1970 to 2010. The population in Coastal Shoreline Counties increased by 34.8 million people, a 39% increase, while the nation's entire population increased by 52% over the same period.

Within the limited space of the nation's coast, population density far exceeds the nation as a whole, and this trend will continue into the future. This situation presents coastal managers with the challenge of protecting both coastal ecosystems from a growing population and protecting a growing population from coastal hazards.

The concentration of people impacts the integrity of coastal ecosystems, and at the same time, the lives and livelihoods of some of these residents and visitors can be at risk from natural processes at the coast – such as hurricanes, erosion, and sea level rise.

## **7. NOAA - Economics National Ocean Watch (ENOW)**

Source: <https://coast.noaa.gov/enowexplorer/#/employment/total/2013/44007>

The ENOW provides time-series data on the ocean and Great Lakes economy, which includes six sectors dependent on the ocean and Great Lakes: living resources, marine construction, marine transportation, offshore mineral resources, ship and boat building, and tourism and recreation.

The annual time-series contains data for over 400 coastal counties, 30 coastal states, 8 regions, and the nation, derived from the Bureau of Labor Statistics and the Bureau of Economic Analysis. It describes six economic sectors that depend on the oceans and Great Lakes and measures four economic indicators: (1) Establishments, (2) Employment, (3) Wages, and (4) Gross Domestic Product (GDP).

Candidate indicators found in this database are the following:

6.1 Marine Transportation Jobs County (9)

6.2 MT GDP County (10)

6.3 MT Wages County (11)

## **8. NOAA Office for Coastal Management<sup>9</sup> (OCM): Quick Report Tool for Socioeconomic Data**

Source: <https://coast.noaa.gov/digitalcoast/tools/qrt.html>

The quick reporting tool for socio-economics facilitates the following:

(a) Exploration of economic and demographic information for areas of interest

(b) Comparison of information for various geographies and time frames

(c) Downloading and share data.

Candidate indicator found in this database is the following:

7.1 Population Change County (12)

## **9. NOAA Coastal Management: County Snap Shot**

Source: <https://coast.noaa.gov/digitalcoast/training/population-report.html>

This database presents two independent sections with basic demographic status and trends information for coastal shoreline counties and coastal watershed counties; in this way, the coastal management community can choose the appropriate statistics for their needs. The database also offers a simple comparison between the two groups of counties.

Candidate indicators found in this database are the following:

8.1 Population Inside Floodplain (13)

8.2 Population Poverty County (14)

8.3 Population Over 65 (15)

## 10. NOAA National Marine Protected Areas (MPA) Center

Source: <https://marineprotectedareas.noaa.gov/aboutmpas/mpacenter>

The National MPA Center was established in 2000 to strengthen and connect the nation's marine protected areas, as called for in Executive Order 13158. The MPA Center is a partnership between NOAA and the Department of the Interior to serve serving as a resource to all federal, state, territorial, and tribal programs responsible for the health of the nation's oceans. The National MPA Center goals are to accomplish the following:

Improve MPA design, stewardship, and effectiveness:

- (a) Connect MPA programs and to advance public understanding
- (b) Partnerships about MPA programs.

The NOAA MPA Inventory describes all MPAs in U.S. waters, where they are and what they do. This comprehensive geospatial database combines publicly available data with information from state and federal MPA programs. It can be used to view MPAs, explore status and trends of MPAs, create customized maps and analytical products, or add MPAs to data portals, online viewers, and other spatial data visualizations. Published annually, the MPA Inventory appears in various formats to meet a wide range of user needs.

Candidate indicator found in this database is the following:


9.1 Miles to MPA (16)

## II. Environmental Protection Agency (EPA)

### 11. The Air Quality Index (AQI) database - For Air Pollution Days

Source: <https://www.epa.gov/airdata>

The Air Data Air Quality Index Summary Report displays an annual summary of AQI values for counties or Core Based Statistical Areas. AQI is an indicator of overall air quality presenting all the criteria air pollutants measured within a geographic area. AQI provides information on pollutant concentrations of ground-level ozone, particulate matter, carbon monoxide, sulfur dioxide, and nitrogen dioxide (Figure E-3).

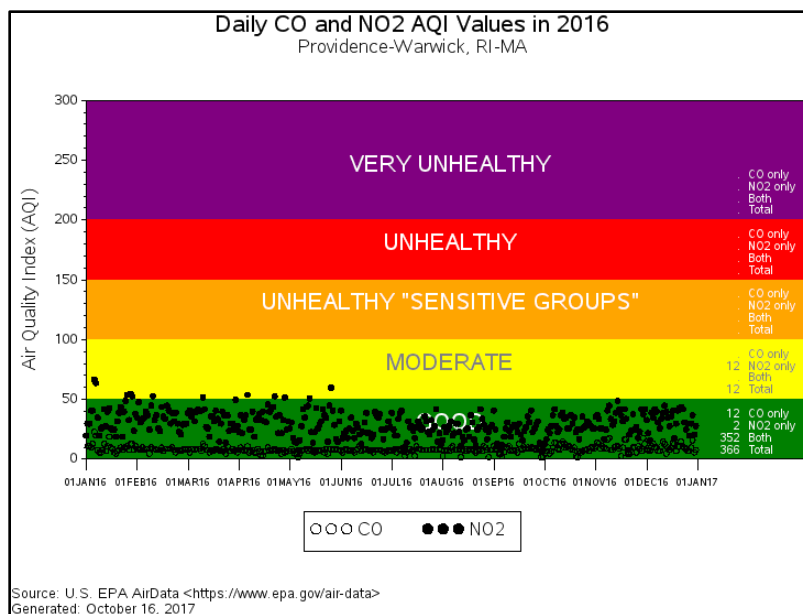Figure E-3. Daily CO and NO<sub>2</sub> AQI Values in 2016.

The AQI is based on pollutant concentration data measured by the *State* and *local air monitoring stations network* and by other special purpose monitors. For most pollutants in the index, the concentration is converted into index values between 0 and 500, *normalized* so that an index value of 100 represents the short-term, health-based standard for that pollutant as established by EPA (1999) are currently presented in the [AIRNow.gov](https://www.airnow.gov). The higher the index value, the greater the level of air pollution and health risk. An index value of 500 reflects a risk of imminent and substantial endangerment of public health. The level of the pollutant with the highest index value corresponds with the AQI level reported for that day.

Candidate indicator found in this database is the following:

#### 11.1 Air Pollution Days (17)

### III. Federal Emergency and Management Agency (FEMA)

For 38 years, the FEMA mission has been to lead America to prepare for, prevent, respond to, and recover from disasters with a vision of "A Nation Prepared." The origin of FEMA can be traced to the Congressional Act of 1803, considered the first piece of disaster legislation that provided assistance to a New Hampshire town following an extensive fire. On April 1, 1979, President Jimmy Carter signed the executive order that created the FEMA.



## 12. Historical Disaster Declarations

Source: <https://www.fema.gov/data-visualization-disaster-declarations-states-and-counties>

**Major disaster declaration:** The President can declare a major disaster for any natural event. These include any hurricane, tornado, storm, high water, wind-driven water, tidal wave, tsunami, earthquake, volcanic eruption, landslide, mudslide, snowstorm, or drought, or, regardless of cause, fire, flood, or explosion that the President determines has caused damage of such severity that it is beyond the combined capabilities of state and local governments to respond. A major disaster declaration provides a wide range of federal assistance programs for individuals and public infrastructure, including funds for emergency and permanent work<sup>1</sup>. In cases where a port spans multiple counties, the port county with highest number of disasters is used.

Candidate indicators found in this database are the following:

11.1 Number Disasters County (18)

11.2 Disaster Housing Assistance County (19)

## IV. U.S. Department of Transportation (USDOT)

### 13. U.S. DOT Climate Data Processing Tool (CMIP)

Source:  
[https://www.fhwa.dot.gov/environment/sustainability/resilience/adaptation\\_framework/modules/index.cfm?moduleid=4#tools](https://www.fhwa.dot.gov/environment/sustainability/resilience/adaptation_framework/modules/index.cfm?moduleid=4#tools)

The U.S. DOT CMIP climate data processing tool processes readily available downscaled climate data at the local level into relevant statistics for transportation planners. This tool works with data from the U.S. Bureau of Reclamation's downscaled CMIP3 and CMIP5 Climate and Hydrology Projections website, available at [http://gdo-dcp.ucllnl.org/downscaled\\_cmip\\_projections](http://gdo-dcp.ucllnl.org/downscaled_cmip_projections). This website houses climate model data from phase 3 (CMIP3) and phase 5 (CMIP5) of the World Climate Research Program's Coupled Model Inter-comparison Project (CMIP).

The CMIP Climate data processing tool, developed by the U.S. DOT, will

---

<sup>1</sup> FEMA Disaster declaration process: <https://www.fema.gov/disaster-declaration-process>.

process raw climate model outputs from the World Climate Research Program's CMIP3 and CMIP5 into relevant statistics for transportation planners. These statistics include changes in the frequency of very hot days and extreme precipitation events and other climate characteristics that may affect transportation infrastructure and services by the middle and end of the century.

Candidate indicators found in this database are the following:

- 12.1 Projected Change in Days above Baseline Extremely Hot Temperature (20)
- 12.2 Number of Extremely Heavy Precipitation Events (21)

#### **14. U.S. DOT Pipeline and Hazardous Materials Safety and Administration (PHMSA): Incidents Statistics**

Source: <http://phmsa.dot.gov/hazmat/library/data-stats/incidents>

The PHMSA agency develops and enforces regulation for the safe, reliable, and environmentally sound operation of the nation's 2.6-million-mile pipeline transportation system and the nearly 1 million daily shipments of hazardous materials by land, sea, and air. PHMSA comprises two safety offices, the Office of Pipeline Safety and the Office of Hazardous Materials Safety.

Hazardous material means a substance or material that the Secretary of Transportation has determined can pose an unreasonable risk to health, safety, and property when transported in commerce and has designated as hazardous under section 5103 of federal hazardous materials transportation law (49 U.S.C. 5103).

Each person in physical possession of a hazardous material at the time that any of the following incidents occurs during transportation (including loading, unloading, and temporary storage) must submit a hazardous materials incident report within 30 days of discovery of the incident.

Candidate indicators found in this database are the following:

- 13.1 Number Hazmat Incidents (22)
- 13.2 Hazmat Incidents Max Cost (23)

## 15. U.S. DOT Federal Highway Administration – National Bridge Inventory

Source: <https://www.fhwa.dot.gov/bridge/nbi/no10/county.cfm>

The National Bridge Inventory has information on bridges in the port county that are structurally deficient or functionally obsolete. These are presented in percentage. *Structurally deficient* means that the condition of the bridge includes a significant defect, which often means that speed or weight limits must be put on the bridge to ensure safety; a structural evaluation of 4 or lower qualifies a bridge as structurally deficient. The designation can also apply if the approaches flood regularly.

*Functionally obsolete* means that the design of a bridge is not suitable for its current use, such as lack of safety shoulders or the inability to handle current traffic volume, speed, size, or weight.

Candidate indicator found in this database is the following:

14.1 Percent Deficient Bridges County (24)

## 16. U.S. DOT Maritime Administration (MARAD)

Source: <https://www.marad.dot.gov/resources/data-statistics/>

This dataset contains a calculation of vessel calls and vessel capacity for privately owned, oceangoing merchant vessels of all flags of registries over 1,000 gross tons calling at ports and selected ports/terminals within the contiguous United States, Hawaii, Alaska, Guam, and Puerto Rico. Vessel capacity is defined as the number of vessel calls multiplied by the dead weight total (DWT) of the vessels. This gives a more insightful picture of port activity than number of calls alone, since some vessels are larger than others. Though the Maritime Administration (MARAD) strives to provide the most accurate information on vessel activity in the United States, these numbers may vary from statistics collected by port authorities and terminal operators. In addition, vessels calling on a port may not necessarily be engaged in onloading/offloading of cargoes.

MARAD database presents a list that contains over 110,000 privately owned, oceangoing merchant vessels registered with an International Maritime Organization number and isolate cargo-carrying vessels from all other types of vessels utilizing the “Statcode.” From this list, all passenger and passenger/roll on-roll off (ro-ro) cargo ships are eliminated. Then,

this list of vessels is taken and compared against the Automatic Identification System (AIS) data generated for that vessel.

**Vessel Types:** MARAD uses six vessel categories in this report: (1) Containerships, (2) Tanker, (3) Dry Bulk, (4) General Cargo, (5) Roll On – Roll Off, and (6) Gas.

**Calls** are calculated by how many times a vessel arrived at a port, facility, or terminal. This number may include berth shifts, movement to and from an anchorage while awaiting cargo, and may include other activities related to vessel, port, or terminal operations. Calls do not include vessels arriving at a designated anchorage area. In addition, vessels calling on a port may not necessarily be engaged in onloading/offloading of cargoes.

**Capacity** is the sum of vessel calls weighted by vessel DWT. DWT is the total weight (metric tons) of cargo, fuel, fresh water, stores and crew, which a ship can carry when immersed to its load line. Capacities can be expressed in Twenty Foot Equivalent Units (TEU) for containerships and cubic meters for gas carriers.

Candidate indicators found in this database are the following:

- 15.1 Tanker Capacity (25)
- 15.2 Tanker Calls (26)
- 15.3 Container Capacity (27)
- 15.4 Container Calls (28)
- 15.5 Gas carrier Capacity (29)
- 15.6 Gas Calls (30)
- 15.7 Vessel Capacity (31)
- 15.8 Vessel Calls (32)

## V. The National Geospatial-Intelligence Agency (NGA)

### 17. NGA - World Port Index (Pub 150)

Source:


[http://msi.nga.mil/NGAPortal/MSI.portal?\\_nfpb=true&\\_pageLabel=msi\\_portal\\_page\\_62&pubCode=0015](http://msi.nga.mil/NGAPortal/MSI.portal?_nfpb=true&_pageLabel=msi_portal_page_62&pubCode=0015)

The World Port Index (Pub 150) contains the location and physical characteristics of, and the facilities and services offered by, major ports

and terminals worldwide (approximately 3700 entries as of 2016) in a tabular format. Entries are organized geographically and in accordance with the diagrams of “port type” located in the front of the publication. Information on individual ports is submitted by port representatives and not collected through a regular systematic method. Thus, there may be discrepancies and errors in the data reported.

The World Port Index publication can be downloaded as an Adobe PDF document file, a Microsoft Access database, or an ESRI Arc shapefile. The specific World Port Index entries can be retrieved from the on-line database using the query form (Figure E-4).

Figure E-4. World Port Index entries query form.

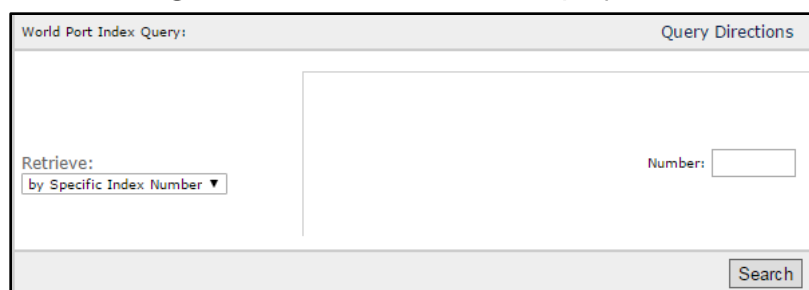

Candidate indicators found in this database are the following:

- 16.1 Shelter Afforded (33)
- 16.2 Entrance Restrictions (34)
- 16.3 Overhead Limits (35)
- 16.4 Channel Depth (36)
- 16.5 Pier Depth (37)
- 16.6 Tide Range (38)
- 16.7 Harbor Size (39)
- 16.8 Harbor Type (40)

## VI. U.S. Army Corps of Engineers (USACE)

### 18. Navigation Data Center – U.S. Waterways Database

Source: <http://www.navigationdatacenter.us/data/datappor.htm>

The Principal port file contains USACE port codes, geographic locations (longitude, latitude), names, and commodity tonnage summaries (total tons, domestic, foreign, imports and exports) for Principal USACE Ports.

The ports are politically defined by port limits or USACE projects, excluding non-USACE projects not authorized for publication. The determination for the published Principal Ports is based upon the total tonnage for the port for the particular year; therefore, the top-150 list can vary from year to year.

Candidate indicators found in this database are the following:

- 17.1 Tonnage (41)
- 17.2 Domestic (42)
- 17.3 Foreign (43)
- 17.4 Imports (44)
- 17.5 Exports (45)

## **VII. U.S. Fish and Wildlife Service (USFWS)**

### **19. USFWS - Endangered Species**

Source: <https://www.fws.gov/endangered/>

Threatened or endangered species found by United States are reported for each county. The Endangered Species Act of 1973, as amended, is federal legislation intended to provide a means to conserve the ecosystems upon which endangered and threatened species depend and provide programs for the conservation of those species, thus preventing extinction of plants and animals. The law is administered by the Interior Department Fish and Wildlife Service (FWS) and the Commerce Department NOAA Fisheries, depending on the species.

An endangered species is an animal or plant species in danger of extinction throughout all or a sizable portion of its habitat range.

A threatened species is an animal or plant species likely to become endangered within the foreseeable future throughout all or a significant portion of its habitat range.

Candidate indicator found in this database is the following:

- 18.1 Number Endangered Species County (46)

## 20. Number of Critical Habitat Areas

Source: <http://ecos.fws.gov/ecp/report/table/critical-habitat.html>

**Critical habitat for threatened and endangered species:** A specific geographic area(s) that contains features essential for the conservation of a threatened or endangered species and that may require special management and protection, which are formally designated by rule published in the Federal Register. For a port, this is measured in the number of Critical Habitat Areas within 50 miles of the port.

Candidate indicator found in this database is the following:

19.1 Number Critical Habitat (47)

## VIII. University of South Carolina Hazards and Vulnerability Research Institute

### 21. The Social Vulnerability Index (SoVI®)

Source: <http://artsandsciences.sc.edu/geog/hvri/sovi-data>

County-level socioeconomic and demographic data were used to construct an index of social vulnerability to environmental hazards (SoVI) for the United States based on data collected from 2005 to 2009. This hazards-of-place model (Cutter 1996a) combines the biophysical vulnerability (physical characteristics of hazards and environment) and social vulnerability to determine an overall place vulnerability. Social vulnerability is represented as the social, economic, demographic, and housing characteristics that influence a community's ability to respond to, cope with, recover from, and adapt to environmental hazards.

Most of the sources used by the *Hazards research lab*, which created the SoVI, are obtained from the 5-year American community survey estimates compiled by the U.S. Census Bureau.

After obtaining the relevant data, a principal component analysis (PCA)<sup>1</sup> is used to reduce the data into set of components. Slight adjustments are made to the components to ensure that the sign of the component loadings

---

<sup>1</sup> Principal component analysis (PCA) is a statistical procedure that uses an orthogonal transformation to convert a set of observations of possible correlated variables into a set of values of linearly uncorrelated variables called principal components.

coincide with the individual population characteristic's influence on vulnerability. All components are added together to determine a numerical value that represents the social vulnerability for each county (Cutter et al. 2003)

Candidate indicator found in this database is the following:

20.1 SoVI (48)



## Appendix F: Additional Candidate Indicators Suggested by Experts

Table F-1. Expert-suggested candidate indicators of seaport vulnerability to climate and extreme weather impacts.

Indicator	Units	Description	Data Source
SLR changes in Nuisance and Repetitive Flooding	Percent of tax base at risk	Decreasing RE values	NA
Distance to nearest alternative seaport	Nautical or statute miles	Based on cargo received at the primary seaport	Charts
Alternative transportation modes between seaports	Transportation modes for freight (Pipeline, rail, highway)	As paucity of alternative transportation modes increases, so does the criticality and therefore vulnerability of the primary port	USDOT
Robustness of transportation infrastructure	Number of back-up routes	Robustness of port area to a shock to operations	Mapping
Land use	Industrial/mixed use	Low value vs. high value infrastructure	NA
Surface Transportation Vulnerability	NA	Ports are dependent on surface access	Local, perhaps FHWA

Additionally, potential climate and extreme weather vulnerability indicators identified as desirable are presented; these were not included as no parent database was identified (Table F-2).

**Table F-2. Climate and extreme weather candidate vulnerability indicators, and their units, for which there was no clear database.**

Vulnerability Indicator Description	Units
One percent annual exceedance wind speed for port	Knots
Energy consumption at port	Watts
Water consumption at port	Gallons
Solid waste production at port	Tons
Average age of gantry cranes	Years
Average age of buildings	Years
Average age of berthing infrastructure	Years
Time since last dredged	Months
Port indirect regional employment	Number of jobs
Port direct employment	Number of jobs
Port market share	%
Port insurance actuarial rate	\$
Vessel turnaround time	Hours
Wharf productivity	Twenty-foot equivalent unit (TEU) / Foot of berth
Port Container productivity	Moves / hour
Average container lifts per hour	TEU
Annual crane capacity	TEU
Annual TEU/crane	TEU

Average annual TEU / CY slot (turns)	TEU / CY slot
Average drayage wait times	Minutes
Berth occupancy rate (berth utilization - vessel call basis)	%
Total berth feet	Feet
Number of gantry cranes	Number of cranes
Gantry crane max height	Feet
Gantry crane max outreach	Feet
Gantry crane max tonnage capacity	Tons
Presence of direct rail connections	Yes / no
Do port master plans consider resilience?	Yes / no
Do state and local adaptations plans consider resilience?	Yes / no
Does the port have sustainability plan?	Yes / no
Ability to shift operations	Likert scale
Gross acres	Acres
Container yard (CY) acres	Acres
Container yard / gross ratio	%
Average CY slots / acre – density	Slots per acre
Yard area per berth	Area
Number of berths	Number of berths
Number of berths	Number of berths

## Appendix G: Summary 48 Vulnerability Indicators

**Note:** This list presents 48 selected seaport vulnerability indicators to climate and extreme weather with their descriptions, units, data sources, and example values. This compilation represents an updated version of the 2017 data dictionary; to see the earlier version used for the Visual Analogue Scale survey, go to [URI – Digital Commons](#).

### Indicator 1 – Air Pollution Days

**Description:** Number of days with AQI value greater than 100 for the port city, averaged over the past 5 years. The AQI provides information on pollutant concentrations of ground-level ozone, particulate matter, carbon monoxide, sulfur dioxide, and nitrogen dioxide. The AQI is data measured by the state and local air monitoring stations network and by other special purpose monitors.

**Units:** Number of days per year

**Example values:** Philadelphia, PA: 32 days per year  
Albany, NY: 4 days per year

**Data source: Environmental Protection Agency**

Source: <https://www.epa.gov/outdoor-air-quality-data/air-quality-index-report>

### Indicator 2 – Average Cost of Hazmat Incidents

**Description:** Average cost per incident of total damage from the 10 most costly hazardous materials incidents in the port city since 2007. Total amount of damages: This figure includes the cost of the material lost, carrier damage, property damage, response costs, and remediation cleanup costs.

**Units:** \$USD

**Example values:** Port of NY/NJ: \$2,877,763 per incident  
Baltimore, MD: \$5,099,343 per incident

**Data source: U.S. DOT Pipeline and Hazardous Materials Safety Administration – Incident Statistics**

Source: <http://phmsa.dot.gov/hazmat/library/data-stats/incidents>

### Indicator 3 – Average Cost of Storm Events

**Description:** Average cost of property damage from storm events in the port county since 1950 with property damage greater than \$1 million.

**Units:** \$ millions USD

**Example values:** Port of Boston, MA (Suffolk County): \$5.92 million  
Searsport, ME (Waldo County): \$7.05 million

**Data source:** NOAA Storm Events

Source: <https://www.ncdc.noaa.gov/stormevents/>

### Indicator 4 – Maximum Cost of Storm Events

**Description:** The maximum cost is the value in property damage from the costliest storm event in the port county since 1950. Estimates of the costs of a storm are clear signal of economic loss. Communities can use the cost estimates to leverage investments that are needed to reduce the maximum cost.

**Units:** \$ millions USD

**Example values:** Port of NY/NJ: \$5,000 million due to Coastal Flooding  
Bridgeport, CT: \$6 million due to Flash Floods

**Data source:** NOAA Storm Events

Source: <https://www.ncdc.noaa.gov/stormevents/>

### Indicator 5 – Channel Depth

**Description:** The controlling depth of the principal or deepest channel at chart datum. The channel selected should lead up to the anchorage if within the harbor or to the wharf/pier. If the channel depth decreases from the anchorage to the wharf/pier and cargo can be worked at the anchorage, then the depth leading to the anchorage is taken.

Depth information is generalized into 5-foot (ft) units, with the equivalents in meters, for the main channel, the main anchorage, and the principal cargo pier and/or oil terminal. A depth of 31 ft (9.5 meters [m]) would use letter “K,” a depth of 36 ft (11.0 m) would use “J,” etc. The letter

“K” means a least depth of 31 ft (9.5 m) or greater, but not as great as 36 ft (11.0 m).

Large ports may have sub-ports (smaller) that have their own number and entry in the World Port Index. The controlling depth of the channel should refer to a smaller channel (if present) leading from the main channel into the sub-port facilities and anchorages.

**Units:** A (over 76 ft) to Q (0 – 5 ft) in 5 ft increments

**Example values:** Wilmington, DE: M (21 - 25 ft)  
Norfolk, VA: H (41 - 45 ft)

**Data source: The National Geospatial-Intelligence Agency (NGA)**

Source:

[http://msi.nga.mil/NGAPortal/MSI.portal?\\_nfpb=true&\\_pageLabel=msi\\_portal\\_page\\_62&pubCode=0015](http://msi.nga.mil/NGAPortal/MSI.portal?_nfpb=true&_pageLabel=msi_portal_page_62&pubCode=0015)

## Indicator 6 – CMIP Days above Baseline Extremely Hot Temperature

**Description:** The percent change from observed baseline of the average number of days per year above baseline “Extremely hot” temperature projected for the end-of-century, downscaled to 12 kilometer (km) resolution for the port location. “Extremely hot” day temperature defined as 99th percentile temperature.

**Units:** Percentage

**Example values:** Providence, RI: 440% increase  
Portland, ME: 220% increase

**Data source: U.S. DOT CMIP Climate Data Processing Tool**

Source:

[https://www.fhwa.dot.gov/environment/sustainability/resilience/adaptation\\_framework/modules/index.cfm?moduleid=4#tools](https://www.fhwa.dot.gov/environment/sustainability/resilience/adaptation_framework/modules/index.cfm?moduleid=4#tools)

## Indicator 7 – CMIP Number of Extremely Heavy Precipitation Events

**Description:** The percent change from observed baseline of the average number of “Extremely Heavy” precipitation events projected for the end-of-century, downscaled to 12 km resolution for the port location. “Extremely Heavy” precipitation events can be equal or greater than 1.5 inches in 24 hours.

**Units:** Percentage

**Example values:** Providence, RI: 122% increase  
Portland, ME: 77% increase

**Data source:** U.S. DOT CMIP Climate Data Processing Tool

Source:

[https://www.fhwa.dot.gov/environment/sustainability/resilience/adaptation\\_framework/modules/index.cfm?moduleid=4#tools](https://www.fhwa.dot.gov/environment/sustainability/resilience/adaptation_framework/modules/index.cfm?moduleid=4#tools)

## Indicator 8 – Containership Calls

**Description:** Annual containership calls at the port. Containership is equal to *container ship and passenger/container ships*. Calls are calculated by how many times a vessel arrived at a port, facility or terminal. This number may include berth shifts, movement to and from an anchorage while awaiting cargo, and may include other activities related to vessel, port, or terminal operations. Calls do not include vessels arriving at a designated anchorage area. In addition, vessels calling on a port may not necessarily be engaged in onloading/offloading of cargoes.

**Units:** Number of calls × vessel DWT

**Example values:** Hampton Roads, VA: 104,862,259,278 in 2015  
Providence, RI: 0 in 2015

**Data source:** U.S. DOT Maritime Administration

Source: <https://www.marad.dot.gov/resources/data-statistics/>

## Indicator 9 – Containership Capacity

**Description:** The Containership Capacity is expressed in Twenty-Foot Equivalent Units (TEU) for containerships.

**Units:** Number of calls × vessel DWT

**Data source:** U.S. DOT Maritime Administration

Source: <https://www.marad.dot.gov/resources/data-statistics/>

## Indicator 10 – Disaster Housing Assistance

**Description:** The total disaster housing assistance of Presidential disaster declarations for the port county. FEMA disaster declarations

summary is a dataset describing all federally declared disasters. This information begins with the first disaster declaration in 1953 and features all three disaster declaration types: major disaster, emergency, and fire management assistance.

**Units:** Number of millions of USD

**Example values:** Providence, RI (Providence County): \$9.98 million  
Portland, ME (Cumberland County): \$0.0

**Data source: FEMA – Historical Disaster Housing Assistance**

Source: <https://www.fema.gov/data-visualization-disaster-housing-assistance>

## Indicator 11 – Entrance Restrictions

**Description:** Number of entrance restrictions to the port.

**Units:** Tide, swell, ice, other, or none

**Example values:** Port of NY/NJ: 1 (Tide)  
Boston, MA: 0 (None)

**Data source: The National Geospatial-Intelligence Agency (NGA)**

Source:

[http://msi.nga.mil/NGAPortal/MSI.portal?nfpb=true&pageLabel=msi\\_portal\\_page62&pubCode=0015](http://msi.nga.mil/NGAPortal/MSI.portal?nfpb=true&pageLabel=msi_portal_page62&pubCode=0015)

## Indicator 12 – Environmental Sensitivity Index (ESI)

**Description:** ESI shoreline sensitivity to an oil spill. Using the ranking for the most sensitive shoreline within the port. The ranking scale goes from 1 to 10.

A rank of 1 represents shorelines with the least susceptibility to damage by oiling. Examples include steep, exposed rocky cliffs and banks. The oil cannot penetrate the rock and will be washed off quickly by the waves and tides.

A rank of 10 represents shorelines most likely to be damaged by oiling. Examples include protected, vegetated wetlands, such as mangrove swamps and saltwater marshes. Oil in these areas will remain for an



extended period, penetrate deeply into the substrate, and inflict damage to many kinds of plants and animals.

**Units:** ESI Rank (1.00 - 10.83; the higher the number, the more sensitive the shoreline is to an oil spill)

**Example values:** Philadelphia, PA: 1.25  
Albany, NY: 9.25

**Data source: NOAA Office of Response and Restoration**

Source: <http://response.restoration.noaa.gov/maps-and-spatial-data/shoreline-rankings.html>

### Indicator 13 – Gas Calls

**Description:** Number of gas carrier calls at the port. Gas – liquefied petroleum and liquefied natural gas carriers.

**Units:** Number of gas carrier calls × vessel DWT

**Example values:** Boston, MA: 284,802 in 2015  
Port of NY/NJ: 6,424 in 2015

**Data source: U.S. DOT Maritime Administration**

Source: <https://www.marad.dot.gov/resources/data-statistics/>

### Indicator 14 – Gas Capacity

**Description:** Gas Carrier Capacity at the port.

**Units:** Number of calls × vessel DWT

**Data source: U.S. DOT Maritime Administration**

Source: <https://www.marad.dot.gov/resources/data-statistics/>

### Indicator 15 – Harbor Size

**Description:** The classification of harbor size is based on several applicable factors, including area, facilities, and wharf space. It is not based on area alone or on any other single factor.

**Units:** Large, medium, small, very small

**Example values:** Port of NY/NJ: Large  
Port of Providence, RI: Medium

**Data source: NGA**

Source:

[http://msi.nga.mil/NGAPortal/MSI.portal?\\_nfpb=true&\\_pageLabel=msi\\_portal\\_page\\_62&pubCode=0015](http://msi.nga.mil/NGAPortal/MSI.portal?_nfpb=true&_pageLabel=msi_portal_page_62&pubCode=0015)

## Indicator 16 – Harbor Type

**Description:** The classification of harbor size is based on several applicable factors, including area, facilities, and wharf space. It is not based on area alone or on any other single factor.

**Units:** Coastal Natural, Coastal Breakwater, Coastal Tide Gate, River Natural, River Basis, None, River Tide Gate, Lake or Canal, Open Roadstead, Typhoon Harbor.

**Example values:** Port of NY/NJ: Coastal River  
Boston, MA: Coastal Natural

**Data source: NGA**

Source:

[http://msi.nga.mil/NGAPortal/MSI.portal?\\_nfpb=true&\\_pageLabel=msi\\_portal\\_page\\_62&pubCode=0015](http://msi.nga.mil/NGAPortal/MSI.portal?_nfpb=true&_pageLabel=msi_portal_page_62&pubCode=0015)

## Indicator 17 – Hundred-Year High Water

**Description:** The hundred-year high water results from probabilistic calculations; it represents the 1% annual exceedance probability high water level that corresponds to the level that would be exceeded one time per century, for the nearest NOAA tide station to the port.

**Units:** Meters above Mean Higher High Water (MHHW)

**Example values:** Port of Boston, MA: 1.40 m above MHHW  
Providence, RI: 2.73 m above MHHW

**Data source: NOAA Extreme Water Levels**

Source: <https://tidesandcurrents.noaa.gov/est/northatlantic.html>

## Indicator 18 – Hundred Year Low Water

**Description:** It is explained by 1% annual exceedance probability low water level for the nearest NOAA tide station to the port, which corresponds to the level that would be exceeded one time per century.

Extremely high or low water levels at coastal locations are a public concern and a factor in coastal hazard assessment, navigational safety, and ecosystem management. Exceedance probability, the likelihood that water levels will exceed a given elevation, is based on a statistical analysis of historic values.

**Units:** Meters below Mean Lower Low Water (MLLW)

**Example values:** Fall River, MA: 0.77 m below MLLW  
Penn Manor, PA: 1.72 m below MLLW

**Data source: NOAA Extreme Water Levels**

Source: <https://tidesandcurrents.noaa.gov/est/northatlantic.html>

## Indicator 19 – Marine Transportation Gross Domestic Product (GDP) County

**Description:** Gross Domestic Product of marine transportation in the port county.

Marine Transportation: Includes deep-sea freight, marine passenger transportation, pipeline transportation, marine transportation services, search and navigation equipment, and warehousing.

**Units:** \$ millions USD

**Example values:** Providence, RI (PVD County): \$59.8 million in 2013  
Searsport, ME (Waldo County): \$4.5 million in 2013

**Data source: NOAA Office for Coastal Management: Economics: National Ocean Watch (ENOW)**

Source: <https://coast.noaa.gov/dataregistry/search/dataset/C3722030-943C-4BEE-B063-06715F815891>

## Indicator 20 – Marine Transportation Jobs

**Description:** Number of marine transportation jobs in the port county

**Units:** Number of jobs

**Example values:** Providence, RI (Providence County): 979 jobs in 2013  
Searsport, ME (Waldo County): 54 jobs in 2013

**Data source: NOAA Office for Coastal Management, and ENOW**

Source: <https://coast.noaa.gov/enowexplorer/#/employment/total/2013/44007>

## Indicator 21 – Marine Transportation Wages per County

**Description:** Average Marine Transportation Wage per employee in port county.

**Units:** \$ USD

**Example values:** Port of NY/NJ: \$1,121,532,498 in 2012  
Port Jefferson, NJ: \$490,972 in 2012

**Data source: NOAA Office for Coastal Management: ENOW**

Source: <https://coast.noaa.gov/enowexplorer/#/employment/total/2013/44007>

## Indicator 22 – Miles to Marine Protected Areas (MPA)

**Description:** Proximity to nearest Marine Protected Area with a protection level including: “No Take,” “No Impact,” or “No Access”.

**Units:** Miles

**Example values:** Baltimore, MD: 97 miles  
Marcus Hook, NY: 8 miles

**Data source: NOAA National MPA Center**

**Source:** <https://marineprotectedareas.noaa.gov/dataanalysis/mpainventory/>

## Indicator 23 – Number of Critical Habitat Areas

**Description:** Number of critical habitat areas within 50 miles of the port. Critical habitat for threatened and endangered species: A specific geographic area(s) that contains features essential for the conservation of a threatened or endangered species and that may require special

management and protection and that have been formally designated by rule published in the federal registry.

**Units:** Number of areas

**Example values:** New Castle, DE: 0 areas  
Boston, MA: 22 areas

**Data source: U.S. Fish and Wildlife Service**

Source: <http://ecos.fws.gov/ecp/report/table/critical-habitat.html>

## Indicator 24 – Number of Cyclones

**Description:** These data are the number of cyclones that have passed within 100 nm of the port since 1842. This data service is for the tiled image of all tropical storms and it is used as an overlay within web maps.

**Units:** Number of cyclones

**Example values:** Norfolk, VA: 116 cyclones  
Albany, NY: 28 cyclones

**Data source: NOAA Historical Tracks Tool**

Source: <https://coast.noaa.gov/hurricanes/>

## Indicator 25 – Number of Disasters

**Description:** The number of disasters refers to the counts of presidential disaster declarations for the port county since 1953. In cases where a port spans multiple county, the port county with highest number of disasters is used.

**Units:** Number of declarations

**Example values:**

Providence, RI (Providence County): 18 disaster declarations  
Portland, ME (Cumberland County): 33 disaster declarations

**Data source: FEMA Historical Disaster Declarations**

Source: <https://www.fema.gov/data-visualization-disaster-declarations-states-and-counties>

## Indicator 26 – Number of Endangered Species

**Description:** Number of threatened or endangered species found in port county, if the port spans multiple counties, use the port county with the highest number.

An endangered species is an animal or plant species in danger of extinction throughout all or a sizable portion of its habitat range. A threatened species is an animal or plant species likely to become endangered within the foreseeable future throughout all or a significant portion of its habitat range.

The Endangered Species Act of 1973, as amended is federal legislation, is intended to provide a means to conserve the ecosystems upon which endangered and threatened species depend, and provide programs for the conservation of those species, thus preventing extinction of plants and animals. The law is administered by the Interior Department FWS and Commerce Department's NOAA Fisheries, depending on the species.

**Units:** Number of species

**Example values:** Providence, RI (Providence County): 8 species  
Portland, ME (Cumberland County): 11 species

**Data source:** U.S. Fish and Wildlife Service

Source: <https://www.fws.gov/endangered/>

## Indicator 27 – Number of Hazmat Incidents

**Description:** Number of Hazardous Materials Incidents in port city since 2007.

*Hazardous material* means a substance or material that the Secretary of Transportation has determined being capable of posing an unreasonable risk to health, safety, and property when transported in commerce, and has designated as hazardous under section 5103 of federal hazardous materials transportation law (49 U.S.C. 5103). The term includes hazardous substances, hazardous wastes, marine pollutants, elevated temperature materials, as well as materials designated as hazardous in the Hazardous materials table (see 49 CFR 172.101).

Hazardous materials in various forms can cause death, serious injury, long-lasting health effects, and damage to buildings, homes, and other property. Many products containing hazardous chemicals are used and stored in homes routinely. These products are also shipped daily on the nation's highways, railroads, waterways, and pipelines.

**Units:** Number of incidents

**Example values:** Philadelphia, PA: 1,981 incidents  
Camden, NJ: 154 incidents

**Data source: U.S. DOT Pipeline and Hazardous Material Safety Administration**

Source: <https://hazmatonline.phmsa.dot.gov/IncidentReportsSearch/IncrSearch.aspx>

## Indicator 28 – Number of Storm Events

**Description:** The number of storm events in a port county is storms from 1950 to 2016 that have a recorded property damage of more than 1 million U.S. dollars. Records on the number of storms are useful to identify areas that are most vulnerable, based on their historical past.

**Units:** Number of storms

**Example values:** Port of Boston, MA (Suffolk County): 11 Events  
Searsport, ME (Waldo County): 4 Events

**Data source: NOAA Storm Events Database**

Source: <https://www.ncdc.noaa.gov/stormevents/>

## Indicator 29 – Overhead Limits

**Description:** Indicates that bridge and overhead power cables exist.

**Units:** Y=1, N=0

**Example values:** Port of NY/NJ: 1 (Yes)  
Norfolk, VA: 0 (No)

**Data source: The National Geospatial-Intelligence Agency (NGA)**

Source:

[http://msi.nga.mil/NGAPortal/MSI.portal?\\_nfpb=true&\\_pageLabel=msi\\_portal\\_page\\_62&pubCode=0015](http://msi.nga.mil/NGAPortal/MSI.portal?_nfpb=true&_pageLabel=msi_portal_page_62&pubCode=0015)

## Indicator 30 – Percentage of Bridges Deficient County

**Description:** Percentage of bridges in the port county that are structurally deficient or functionally obsolete.

*Structurally deficient* means that the condition of the bridge includes a significant defect, which often means that speed or weight limits must be put on the bridge to ensure safety; a structural evaluation of 4 or lower qualifies a bridge as structurally deficient. The designation can also apply if the approaches flood regularly. *Functionally obsolete* means that the design of a bridge is not suitable for its current use, such as lack of safety shoulders or the inability to handle current traffic volume, speed, size, or weight.

**Units:** Percentage

**Example values:** Philadelphia, PA (Philadelphia County): 22.50%  
Baltimore, MD (Baltimore-City County): 3.46%

**Data source:** U.S. DOT Federal Highway Administration,  
National Bridge Inventory

Source: <https://www.fhwa.dot.gov/bridge/nbi/no10/county.cfm>

## Indicator 31 – Pier Depth

**Description:** The greatest depth at chart datum alongside the respective wharf/pier. If there is more than one wharf/pier, then the one that has greatest usable depth:

**Units:** A (over 76 ft) to Q (0 – 5 ft) in 5 ft increments

**Example values:** Baltimore, MD: G (46 - 51 ft)  
Paulsboro, NJ: K (31 - 35 ft)

**Data source:** The National Geospatial-Intelligence Agency  
(NGA)

Source:

[http://msi.nga.mil/NGAPortal/MSI.portal?\\_nfpb=true&\\_pageLabel=msi\\_portal\\_page\\_62&pubCode](http://msi.nga.mil/NGAPortal/MSI.portal?_nfpb=true&_pageLabel=msi_portal_page_62&pubCode)

See indicator 5 – Channel depth



## Indicator 32 – Population Change County

**Description:** Rate of population change for a port county, expressed as percent change for a period (2000-2010).

**Units:** Percentage

**Example values:**

Baltimore, MD (Baltimore-City County): -4.64% decrease  
Gloucester, NJ (Gloucester County): +13.20% increase

**Data source: NOAA Office for Coastal Management**

Source: <https://coast.noaa.gov/digitalcoast/tools/qrt.html>

## Indicator 33 – Population inside Floodplain

**Description:** Percentage of the port county population living inside the FEMA floodplain.

The more homes and people located in a floodplain, the greater the potential for harm from flooding. Impacts are likely to be even greater when additional risk factors (age, income, capabilities) are involved, since people at greatest flood risk may have difficulty evacuating or taking action to reduce potential damage.

**Units:** Percentage

**Example values:** Wilmington, DE (New Castle County): 8%  
Norfolk, VA (Norfolk County): 18%

**Data source: NOAA Office for Coastal Management**

Source: <http://www.census.gov/programs-surveys/acs/data/summary-file.2013.html>

## Indicator 34 – Population over 65 Years Old

**Description:** Percentage of population over age 65 in the port county. Present results are based on 2009-2013 American Community Survey 5-year file summary data.

The more homes and people located in a floodplain, the greater the potential for harm from flooding. Impacts are likely to be even greater when additional risk factors (age, income, capabilities) are involved, since

people at greatest flood risk may have difficulty evacuating or taking action to reduce potential damage.

**Units:** Percentage

**Example Values:** Baltimore, MD (Baltimore-City County): 4% in 2010  
Portsmouth, ME (Portsmouth County): 14% in 2010

**Data source:** NOAA Office for Coastal Management

Source: <http://www.census.gov/programs-surveys/acs/data/summary-file.2013.html>

### Indicator 35 – Population Poverty County

**Description:** Percentage of population in the port county living below poverty thresholds. Also based on 2009-2013 American Community Survey 5-year file summary data.

**Units:** Percentage

**Example Values:** Hampton Roads, VA: 13% in 2010  
Philadelphia, PA: 1% in 2010

**Data source:** NOAA Office for Coastal Management

Source: <http://www.census.gov/programs-surveys/acs/data/summary-file.2013.html>

### Indicator 36 – Sea Level Trend

**Description:** Relative sea level trends reflect changes in local sea level over time and are typically the most critical sea level trend for many coastal applications, including coastal mapping, marine boundary delineation, coastal zone management, coastal engineering, sustainable habitat restoration design, and the general public enjoying their favorite beach.

**Units:** Millimeters per year (mm/yr)

**Example Values:** Norfolk, VA: 4.6 mm/yr  
Portland, ME: 1.9 mm/yr

**Data source:** NOAA Tides and Current – Sea Level Trend

Source: <https://tidesandcurrents.noaa.gov/sltrends/sltrends.html>

## Indicator 37 – Shelter Afforded

**Description:** The shelter afforded from wind, sea, and swell refers to the area where normal port operations are conducted, usually the wharf area. Shelter afforded the anchorage area is given for ports where lighters handle the cargo.

**Units:** Excellent (5), good (4), fair (3), poor (2), none (1)

**Example Values:** New Haven, CT: Good (4)  
Boston, MA: Excellent (5)

**Data source: The National Geospatial-Intelligence Agency (NGA)**

Source:

[http://msi.nga.mil/NGAPortal/MSI.portal?\\_nfpb=true&\\_pageLabel=msi\\_portal\\_page\\_62&pubCode=0015](http://msi.nga.mil/NGAPortal/MSI.portal?_nfpb=true&_pageLabel=msi_portal_page_62&pubCode=0015)

## Indicator 38 – SoVI Social Vulnerability Score

**Description:** Port County Social Vulnerability (SoVI) Score

**Units:** The SoVI is classified using standard deviations. Social vulnerability scores that are greater than 2 standard deviations above the mean are considered the most socially vulnerable, and scores below 2 standard deviations less than the mean are the least vulnerable.

**Example Values:**

Philadelphia, PA (Philadelphia County): 3.418284 (High)  
Norfolk, VA (Norfolk County): -0.207217 (Medium)

**Data source: University of South Carolina Hazards and Vulnerability Research Institute**

Source: <http://artsandsciences.sc.edu/geog/hvri/sovi-data>

Also available at CDC: <https://svi.cdc.gov/>

And connected to: <https://toolkit.climate.gov/tool/social-vulnerability-index>

### Social Vulnerability

The hazards-of-place model (Cutter 1996a) combines the biophysical vulnerability (physical characteristics of hazards and environment) and social vulnerability to determine an overall place vulnerability. *Social*

*vulnerability* is the social, economic, demographic, and housing characteristics that influence a community's ability to respond to, cope with, recover from, and adapt to environmental hazards.

### Indicator 39 – Tanker Calls

**Description:** Number of tanker calls at the port. Numbers are based on annual data from 2001 – 2015.

**Units:** Number of tanker calls × vessel DWT

**Example values:** Albany, NY: 21,437,035 in 2015  
Fall River, MA: 0 in 2015

**Data source:** U.S. DOT Maritime Administration

Source: <https://www.marad.dot.gov/resources/data-statistics/>

### Indicator 40 – Tanker Capacity

**Description:** Annual tanker capacity at the port. Tankers – CO<sub>2</sub>, chemical, chemical/oil, wine, vegetable oil, edible oil, beer, latex, crude oil, oil products, bitumen, coal/oil, water, fruit juice, molasses, glue, alcohol, and caprolactam.

**Units:** Number of tanker calls × vessel DWT

**Example values:** Philadelphia, PA: 59,323,793 calls × DWT 2012  
Albany, NY: 147,445 calls × DWT 2012

**Data source:** U.S. DOT Maritime Administration

Source: <https://www.marad.dot.gov/resources/data-statistics/>

### Indicator 41 – Tide Range

**Description:** The mean tidal range at the port. The mean tide range in meters is normally given for all U.S. ports and ports under the U.S. jurisdiction; the mean rise is substituted if range data are not available. The distinction between range and rise can be disregarded without affecting the general utility of this publication.

**Units:** Feet

**Example Values:** Baltimore, MD: 1 ft  
Paulsboro, NJ: 6 ft

**Data source: The National Geospatial-Intelligence Agency  
(NGA)**

Source:

[http://msi.nga.mil/NGAPortal/MSI.portal?\\_nfpb=true&\\_pageLabel=msi\\_portal\\_page\\_62&pubCode=0015](http://msi.nga.mil/NGAPortal/MSI.portal?_nfpb=true&_pageLabel=msi_portal_page_62&pubCode=0015)

**Indicator 42 – Tonnage (Cargo)**

**Description:** The tonnage is measured by the total annual throughput at the port.

The Principal Port file contains USACE port codes, geographic locations (longitude, latitude), names, and commodity tonnage summaries (total tons, domestic, foreign, imports and exports) for principal USACE ports.

**Units:** Short tons

**Example values:** Port of NY/NJ: 126,690,317 tons in 2015  
Providence, RI: 8,043,051 tons in 2015

**Data source: USACE Navigation Data Center - Principal Ports of the United States**

Source: <http://www.navigationdatacenter.us/data/datappor.htm>

**Indicator 43 – Imports**

**Description:** Foreign imports measured by total annual throughput at the port. Names, and commodity tonnage annual throughput (total tons, domestic, foreign exports for principal USACE ports.

**Units:** Short tons

**Example values:** Bridgeport, CT: 82,673 short tons in 2013  
Philadelphia, PA: 36,280,824 short tons in 2013

**Data source: USACE Navigation Data Center - Principal Ports of the United States**

Source: <http://www.navigationdatacenter.us/data/datappor.htm>

## Indicator 44 – Exports

**Description:** Foreign exports measured by total annual throughput at the port.

**Units:** Short tons

**Example values:** Boston, MA: 888,169 short tons in 2013  
Hampton Roads, VA: 61,673,749 short tons in 2013

**Data source: USACE Navigation Data Center - Principal Ports of the United States**

Source: <http://www.navigationdatacenter.us/data/datappor.htm>

## Indicator 45 – Domestic

**Description:** Summary of the domestic total annual throughput at the port.

**Units:** Short tons

**Example values:** Portland, ME: 930,185 short tons in 2013  
Port of NY/NJ: 46, 716,414 short tons in 2013

**Data source: USACE Navigation Data Center - Principal Ports of the United States**

Source: <http://www.navigationdatacenter.us/data/datappor.htm>

## Indicator 46 – Foreign

**Description:** Foreign throughput is the total annual throughput of each commodity at the port.

**Units:** Short tons

**Example values:** Wilmington, DE: 4,553,381 short tons in 2013  
Norfolk, VA: 42,339,524 short tons in 2013

**Data source: USACE Navigation Data Center - Principal Ports of the United States**

Source: <http://www.navigationdatacenter.us/data/datappor.htm>

## Indicator 47 – Vessel Calls

**Description:** Annual vessel calls at the port. Data are available from 2002-2016. Vessel call calculation contains calls for privately-owned, oceangoing merchant vessels of all flags of registries over 1,000 gross tons (GT) calling at ports and selected ports/terminals within the contiguous United States, Hawaii, Alaska, Guam and Puerto Rico.

**Units:** Number of calls

**Example values:** Albany, NY: 223,943,760 in 2015  
Fall River, MA: 14,707,900 in 2015

**Data source:** U.S. DOT Maritime Administration

Source: <https://www.marad.dot.gov/resources/data-statistics/>

## Indicator 48 – Vessel Capacity

**Description:** Annual vessel calls at the port times the vessel's DWT.

**Units:** Number of vessel calls × vessel DWT

**Example values:** Port of NY/NJ: 198,869,452 calls × DWT in 2012  
Providence, RI: 6,488, 451 calls × DWT in 2012

**Data source:** U.S. DOT Maritime Administration

Source: <https://www.marad.dot.gov/resources/data-statistics/>

---

## **Appendix H: Climate and Extreme Weather Vulnerability Indicators Identified by Web and Literature Search**



**Table H-1. Initial list of 108 potential vulnerability indicators sorted by categories and subcategories. Coded on the right columns in function of the data availability to compare the 22 seaports in the study: (I) Sufficient Data: included in *Mind map*, (J) Selected via *Mind map*: included in VAS survey, and (K) Selected via VAS survey: included in Analytic hierarchy process (AHP) (see [URI - Digital Commons](#)).**

Category	Sub-Category	Sub-Sub-Category	No.	Description	Indicator	Units	Data Source	Sufficient Data: Included in Mind Map	Selected via Mind Map: Included in VAS Survey	Selected via VAS Survey: Included in AHP
Exposure	Storm Hazard	Storm Frequency	1	Number of storm events in port county w/ property damage > \$1M	NumberStormEvents	events	<a href="#">NOAA Storm Events Database</a>	yes	yes	yes
		Storm Damage	2	Cost of property damage from the most costly storm event in the port county since 1950	MaxCostStormEvents	\$	<a href="#">NOAA Storm Events Database</a>	yes	no	no
		Wind Hazard	3	Non-convective high winds	NA	hrs	<a href="#">NOAA Storm Events Database</a>	no	no	no
			4	1% annual exceedance wind speed	NA	hrs	NA	no	no	no
			5	Max historical storm surge	NA	meters	<a href="#">SurgeDAT</a>	no	no	no
		Storm Surge Hazard	6	Highest historical water level	NA	m above MHHW	<a href="#">Top Ten Highest Water Levels for long-term stations</a>	no	no	no
			7	1% annual exceedance probability high water level which corresponds to the level that would be exceeded on average once every 100 years at the nearest NOAA tide station to the port	HundredYearHighWater	m above MHHW	<a href="#">NOAA Tides and Currents: Extreme Water Levels</a>	yes	yes	yes
			8	Number of cyclones that have passed within 100 nm of the port since 1842	NumberCyclones	Number of cyclones	<a href="#">NOAA Historical Hurricane Tracks</a>	yes	yes	yes
		Tropical Cyclone Frequency	9	Tropical cyclone return period	NA	years	<a href="#">NOAA Historical Hurricane Tracks</a>	yes	yes	yes
		Empirical SLR	10	Local Mean Sea Level Trend	NA	mm / yr	<a href="#">National Hurricane Center</a>	no	no	no
		Projected SLR	11	Local SLR Projections	NA	mm / yr	<a href="#">NOAA Tides and Currents: Sea Level Trends</a>	yes	yes	yes
		Rate of vertical land motion due to Glacial Isostatic Adjustment (GIA)	12	annual uplift/subsidence rate	NA	mm / yr	<a href="#">Global Sea Level Rise Scenarios for the United States: National Climate Assessment</a>	no	no	no
		Sea Temperature Anomaly	13	Average Annual Sea Surface Temp Anomaly	NA	mm / yr	<a href="#">Permanent Service for Mean Sea Level (PSMSL) Pelier GFA data sets</a>	no	no	no
		Projected Temperature	14	The percent change from observed baseline of the average number of days per year above baseline temperature projected for the end-of-century downscaled to 12km resolution for the port location	OMP_DaysAboveBaselineExtremelyHotTemperature	%	<a href="#">US DOT OHP Climate Data Processing Tool</a>	yes	yes	no
Sensitivity	Temperature Hazard	Projected Precipitation	15	The percent change from observed baseline of the average number of "Extremely Heavy" Precipitation Events projected for the end-of-century downscaled to 12km resolution for the port location	OMP_NumberOfExtremelyHeavyPrecipEvents	%	<a href="#">US DOT OHP Climate Data Processing Tool</a>	yes	yes	yes
		Disaster Frequency	16	Number of Presidential Disaster Declarations for the port county since 1953	NumberDisastersCounty	Disaster Type	<a href="#">FEMA Historical Disaster Declarations</a>	yes	yes	yes
		Disaster Intensity	17	The total disaster housing assistance of Presidential Disaster Declarations for the port county since 1953	DisasterHousingAssistanceCounty	Declarations	<a href="#">FEMA Historical Disaster Declarations</a>	yes	yes	no
		Surrounding Environment	18	Nearby Federally/State Managed Water	NA	Acres	<a href="#">NOAA National Estuarine Research Reserve System</a>	no	no	no
			19	Number of Threatened or Endangered Species County	NumberEndangeredSpeciesCounty	Species	<a href="#">U.S. Fish &amp; Wildlife Services</a>	yes	yes	no
			20	Nearby Wetlands	NA	Acres	<a href="#">U.S. Fish &amp; Wildlife Services</a>	no	no	no
			21	Number of Critical Habitat Areas within 50 miles of the port	NumberCriticalHabitat	Acres	<a href="#">U.S. Fish &amp; Wildlife Services: Critical Habitat Portal</a>	yes	yes	yes
			22	Proximity to nearest MPA with a Protection level including "No Take," "No Impact," or "No Access"	MilesToMPA	Miles	<a href="#">NOAA National MPA Center</a>	yes	no	no
	Environmental Sensitivity	Air Quality	23	Environmental Sensitivity Index (ESI) shoreline sensitivity to an oil spill for the most sensitive shoreline within the port	ESI	<a href="#">ESI Rank (1.00 - 10.33)</a>	<a href="#">NOAA Office of Response and Restoration: Shoreline Risk Index</a>	yes	yes	yes
			24	Number of Days in Air Quality index value greater than 100 in port city	AirPollutionDays	Days	<a href="#">EPA Air Quality Report</a>	yes	yes	no
			25	Water Consumption	NA	Gallons	NA	no	no	no
			26	Water Consumption	NA	Gallons	NA	no	no	no
		Hazard	27	Solid Waste Production	NA	tons	NA	no	no	no
			28	EPA Brownfields near port	NA	Number of sites	<a href="#">EPA Cleanups in My Community</a>	no	no	no
			29	Number of Hazardous Materials Incidents in port city since 2007	NumberHazardousMaterialsIncidents	Number of incidents	<a href="#">U.S. DOT Pipeline and Hazardous Materials Safety Administration</a>	yes	yes	no
			30	Average cost per incident of total damage from the 10 most costly Hazardous Materials Incidents in the port city since 2007	AvgCostHazardousIncidents	\$	<a href="#">U.S. DOT Pipeline and Hazardous Materials Safety Administration: Incident Statistics</a>	yes	yes	no

Category	Sub-Category	Sub-Sub-Category	No.	Description	Indicator	Units	Data Source	Sufficient Data: Included in Inland Map	Selected via Mind Map: Included in VA S Survey	Selected via VA S Survey: Included in Atg
Sensitivity	Built-Asset Sensitivity	Land-Side Built-Asset Sensitivity	31	Average age of gantry cranes	NA	years	NA	no	no	no
			32	Average age of buildings	NA	years	NA	no	no	no
			33	Average age of berthing infrastructure	NA	years	NA	no	no	no
			34	Average cost of property damage from storm events in the port county since 1950 with property damage > \$1 million	AvgCostStormEvents	\$	NOAA Storm Events Database	yes	yes	yes
			35	Percent of bridges in the port county that are structurally deficient or functionally obsolete	PercentDeficientBridgesCounty	%	US DOT FHWA National Bridge Inventory, Deficient Bridges by County	yes	yes	no
		Water-Side Built-Asset Sensitivity	36	Shelter Afforded	Shelter	Excellent (5), Good (4), Fair (3), Poor (2), None (1)	World Port Index (Pub 150)	yes	yes	no
			37	Presence or absence of entrance restrictions	EntranceRestrictions	Yes, No, Not for, Other	World Port Index (Pub 150)	yes	yes	no
			38	Presence or absence of overhead limitations	OverheadLimits	Y/N	World Port Index (Pub 150)	yes	yes	no
			39	The controlling depth of the principal or deepest channel at draft datum	ChannelDepth	A (over 76 ft) to Q (0 - 5 ft) in 5-foot increments	World Port Index (Pub 150)	yes	yes	no
			40	The greatest depth at chart datum alongside the respective pier that is not less than one wharf pier, then the one which has greatest usable depth is shown.	PierDepth	A (over 76 ft) to Q (0 - 5 ft) in 5-foot increments	World Port Index (Pub 150)	yes	yes	no
	Economic Sensitivity	Regional Economic Sensitivity	41	Mean tide range at the port	TideRange	feet	World Port Index (Pub 150)	yes	yes	no
			42	1% annual exceedance probability low water level for the nearest NOAA tide station to the port, which corresponds to the level that would be exceeded one time per century	HundredYearLowWater	m below MLLW	NOAA Extreme Water Levels	yes	yes	no
			43	Type of Harbor	HarborType	Coastal Natural, Coastal Breakwater, Coastal Tide Gate, River Natural, River Basin, None, River Tide Gate, Lake or Canal, Other, Railroad, Tugboat Harbor	World Port Index (Pub 150)	yes	no	no
			44	Time since last dredged	NA	months	NA	no	no	no
			45	Number of Marine Transportation Jobs in the port county	MTJobsCounty	number of jobs	NOAA Office for Coastal Management, Economic, National, Ocean Watch (ENOW)	yes	yes	no
		Port Economic Sensitivity	46	Average Marine Transportation Wage per employee in port county	MTWagesCounty	\$	NOAA Office for Coastal Management, Economic, National, Ocean Watch (ENOW)	yes	no	no
			47	County Marine Transportation GDP	MTGDPCounty	\$	NOAA Office for Coastal Management, Economic, National, Ocean Watch (ENOW)	yes	yes	no
			48	Port Indirect Regional Employment	NA	number of jobs	NA	no	no	no
			49	Port Direct Employment	NA	number of jobs	NA	no	no	no
			50	Port Market Share	NA	%	NA	no	no	no
	Social Sensitivity	Surrounding Population's Sensitivity	51	Port Insurance Actuarial Rate	NA	\$	NA	no	no	no
			52	Rate of population change (from 2000-2010) in the port county, expressed as a percent change	PopulationChangeCounty	%	NOAA Office for Coastal Management, Quick Report Tool for Socioeconomic Data	yes	yes	yes
			53	Percent of the port county population over age 65	PopulationOver65	%	NOAA Coastal County Snapshots	yes	no	no
			54	Percent of the port county population living below poverty thresholds	PopulationPovertyCounty	%	NOAA Coastal County Snapshots	yes	no	no
			55	Percent of the port county population living inside the FEMA Floodplain	PopulationInsideFloodplain	%	NOAA Coastal County Snapshots	yes	yes	yes
		Surrounding Structures / Asset Sensitivity	56	Port County Social Vulnerability (SoVI) Score	SoVI	score number	SoVI Social Vulnerability Index, FEMA National Flood Insurance Program Community Rating System Score	yes	yes	yes
			57	National Flood Insurance Program Community Rating System Score	NA	score number	FEMA National Flood Insurance Program Community Rating System, Communities and Their Causes	no	no	no

Category	Sub-Category	Sub-Sub-Category	No.	Description	Indicator	Units	Data Source	Sufficient Data Included in Mind Map	Selected via Mind Map Included in VA S Survey	Selected via VA S Survey Included in A/R
Adaptive Capacity	Operational Efficiency	Port/Operational Efficiency	58	Vessel turnaround time	NA	hours	NA	no	no	no
			59	Wharf productivity	NA	TEU/Foot of Berth moves/hour	NA	no	no	no
			60	Port Container Productivity	NA	moves/hour	NA	no	no	no
			61	average container lifts per hour	NA	TEU	NA	no	no	no
			62	annual Crane Capacity	NA	TEU	NA	no	no	no
			63	annual TEU/Crane	NA	TEU	NA	no	no	no
		Operational Efficiency	64	Avg annual TEU/CY Slot (turns)	NA	TEU/CY slot	NA	no	no	no
			65	average drayage wait times	NA	minutes	NA	no	no	no
			66	Berth occupancy rate (Berth Utilization - Vessel Call Basis)	NA	%	NA	no	no	no
			67	annual Truck Congestion Cost	NA	\$ millions	<a href="#">Texas A&amp;M University IRIS Transportation Institute Urban Mobility Information Congestion Data for Your City</a>	no	no	no
	Efficiency of Transport Connections	Efficiency of Transport Connections	68	Roadway Congestion Index	NA	unitless	<a href="#">Texas A&amp;M University IRIS Transportation Institute Urban Mobility Information Congestion Data for Your City</a>	no	no	no
			69	Travel Time Index	NA	unitless	<a href="#">Texas A&amp;M University IRIS Transportation Institute Urban Mobility Information Congestion Data for Your City</a>	no	no	no
			70	Number of Annual Vessel Calls (vessels > 1k DWT) at the port	Vessel Calls	ship calls	<a href="#">U.S. DOT Maritime Administration Vessel Calls at U.S. Ports by Vessel Type</a>	yes	no	no
			71	Harbor Size	Harbor Size	Large, Medium, Small, Very-Small	<a href="#">World Port Index (Pub 100)</a>	yes	yes	no
			72	Vessel Capacity (vessels > 10k DWT)	Vessel Capacity	calls x DWT	<a href="#">U.S. DOT Maritime Administration Vessel Calls at U.S. Ports by Vessel Type</a>	yes	yes	no
			73	Tanker Calls	Tanker Calls	ship calls	<a href="#">U.S. DOT Maritime Administration Vessel Calls at U.S. Ports by Vessel Type</a>	yes	no	no
		Vessels	74	Tanker Capacity	Tanker Capacity	calls x DWT	<a href="#">U.S. DOT Maritime Administration Vessel Calls at U.S. Ports by Vessel Type</a>	yes	yes	no
			75	Gas Carrier Calls	Gas Calls	ship calls	<a href="#">U.S. DOT Maritime Administration Vessel Calls at U.S. Ports by Vessel Type</a>	yes	no	no
			76	Gas Carrier Capacity	Gas Capacity	calls x DWT	<a href="#">U.S. DOT Maritime Administration Vessel Calls at U.S. Ports by Vessel Type</a>	yes	yes	no
			77	Container Vessel Calls	Container Calls	ship calls	<a href="#">U.S. DOT Maritime Administration Vessel Calls at U.S. Ports by Vessel Type</a>	yes	no	no
	Water-Side Capacity	Water-Side Capacity	78	Container Vessel Capacity	Container Capacity	calls x DWT	<a href="#">U.S. DOT Maritime Administration Vessel Calls at U.S. Ports by Vessel Type</a>	yes	yes	no
			79	Cruise-Ship Calls	NA	ship calls	<a href="#">North American Cruise Lines 2015</a>	no	no	no
			80	Cruise-Ship Passengers	NA	passengers	<a href="#">North American Cruise Lines 2015</a>	no	no	no
			81	Total Throughput	Tonnage	Tons	<a href="#">USACE Navigation Data Center Vessel Traffic Statistics 2015</a>	yes	yes	no
			82	Containerized Throughput	NA	TEU	<a href="#">Vessel Traffic Statistics 2015</a>	no	no	no
			83	Domestic Throughput	Domestic	Tons	<a href="#">USACE Navigation Data Center Vessel Traffic Statistics 2015</a>	yes	no	no
		Cargo	84	Foreign Throughput	Foreign	Tons	<a href="#">USACE Navigation Data Center Vessel Traffic Statistics 2015</a>	yes	no	no
			85	Foreign Imports	Imports	Tons	<a href="#">USACE Navigation Data Center Vessel Traffic Statistics 2015</a>	yes	no	no
			86	Foreign Exports	Exports	Tons	<a href="#">USACE Navigation Data Center Vessel Traffic Statistics 2015</a>	yes	no	no
			87	Top Foreign Import By Value	NA	6 digit HS code	<a href="#">USA Trade Online HS Reference Data</a>	no	no	no
	Adaptive Capacity	Adaptive Capacity	88	Top Foreign Import By Weight	NA	6 digit HS code	<a href="#">USA Trade Online HS Reference Data</a>	no	no	no
			89	Top Foreign Export By Value	NA	6 digit HS code	<a href="#">USA Trade Online HS Reference Data</a>	no	no	no
			90	Top Foreign Export By Weight	NA	6 digit HS code	<a href="#">USA Trade Online HS Reference Data</a>	no	no	no

Category	Sub-Category	Sub-Sub-Category	No.	Description	Indicator	Units	Data Source	Sufficient Data: Included in Mind Map	Selected via Mind Map: Included in VAS Survey	Selected via VAS Survey: Included in AHP
Adaptive Capacity	Land-Side Capacity	Flexibility	91	Ability to Shift Operations	NA	Likert scale	NA	no	no	no
			92	Gross Acres	NA	acres	NA	no	no	no
			93	Container Yard Acres	NA	acres	NA	no	no	no
			94	Container Yard / Gross Ratio	NA	%	NA	no	no	no
			95	Avg CY Slots / Acre - Density	NA	slots per acre	NA	no	no	no
			96	Yard area per berth	NA	area	NA	no	no	no
			97	Number of Berths	NA	Number of berths	NA	no	no	no
			98	Total Berth Feet	NA	feet	NA	no	no	no
			99	Number of Gantry Cranes	NA	Number of cranes	NA	no	no	no
			100	Gantry crane max height	NA	feet	NA	no	no	no
		Port Planning	101	Gantry crane max outreach	NA	feet	NA	no	no	no
			102	Gantry crane max tonnage capacity	NA	Tons	NA	no	no	no
			103	Presence of direct Rail Connections	NA	yes / no	NA	no	no	no
			104	Do port Master Plans consider resilience?	NA	yes / no	NA	no	no	no
		Port Growth	105	Do State and Local Adaptations Plans consider resilience?	NA	yes / no	NA	no	no	no
			106	Does the port have sustainability plan?	NA	yes / no	NA	no	no	no
	Port Growth		107	annual % change in throughput	NA	%	<a href="#">USACE Navigation Data Center</a>	no	no	no
			108	annual % change in Port Market Share	NA	%	<a href="#">Principal Ports of the U.S.</a>	no	no	no

## Appendix I: Visual Analogue Scale Selection Online Survey Instrument

Adapted from online version hosted via [www.surveymoz.com](http://www.surveymoz.com), internally tested December 2016 and January 2017, and open to invited experts from 25 January to 23 February 2017.

Indicating Seaport Vulnerabilities to Climate and Extreme Weather Impacts

---

### Informed Consent

Electronic Consent: Please select a choice below. Clicking on the "Agree" button indicates that

You have read the above information

You voluntarily agree to participate

\*

☐ Agree - Enter Survey

☐ Disagree - Exit

---

### Affiliation

Please select the category that best describes your professional affiliation:

☐ Consultant

☐ Academic

☐ (Port / Marine Transportation System) Practitioner

☐ Federal Government

☐ State Government

☐ Non-governmental Organization

☐ Other - Please Specify:

---

### Instructions

Please consider whether this candidate indicator, (Measurable, observable quantity that serves as a proxy for an aspect of a system that cannot itself be directly, adequately measured [page("title")]), could be correlated (The condition of being interdependent; a mutual relation of two or more things such that a change in the value of one is associated with a change in the value or the expectation of the others) with one or more of the three components of climate vulnerability (The degree to which a system is susceptible to, and unable to cope with, adverse effects of climate change, including climate variability and extremes. Vulnerability is a function of the character, magnitude, and rate of

climate change and variation to which a system is exposed, its *sensitivity*, and its adaptive capacity):

*Exposure*: The presence of people, livelihoods, species or ecosystems, environmental functions, services, and resources, infrastructure, or economic, social, or cultural assets in places and settings that could be adversely affected

Example: a port on the U.S. East coast has a *higher exposure* to hurricanes than a port on the U.S. West Coast; independent of the ports' *sensitivity* to damage

*Sensitivity*: The degree to which a system is affected, either adversely or beneficially, by climate-related stimuli

Example: a port with a storm surge barrier may be *less sensitive* to storm driven flooding impacts than a similar port without a storm surge barrier; independent of the ports' *exposure*

and/or the

*Adaptive Capacity*: The ability of systems, institutions, humans and other organisms to adjust to potential damage, to take advantage of opportunities, or to respond to consequences

Example: a port with a robust master plan that considers climate resilience and has a high degree of operational flexibility may have a *higher adaptive capacity* than a port with minimal planning and low redundancy; independent of the ports' *exposure* and *sensitivity* of a port, including the port's surrounding socioeconomic and environmental systems.

For each component of vulnerability: If you feel no correlation exists with [page ("title")], click the slider, leaving it in the center (0) position.

If you feel the component may be correlated with [page ("title")], then drag each slider-To the Right if the correlation is Positive (i.e., an increase in one correlates to an increase in the other)

-To the Left if the correlation is Negative (i.e., an increase in one correlates to a decrease in the other)

-In the Center if you feel there is No Correlation to indicate your opinion of the magnitude and direction of the correlation  
Positive Correlation: An increase in one correlates to an increase in the other

Negative Correlation: an increase in one correlates to a *decrease* in the other

---

Study Area

---

Harbor Size

Shortname / Alias: Harbor Size

1)

<b>Indicator</b>	<b>Harbor Size</b>
<b>Units</b>	Large, Medium, Small, Very Small
<b>Description</b>	The classification of harbor size is based on several applicable factors, including: area, facilities, and wharf space. It is not based on area alone or on any other single factor.
<b>Data Source</b>	The National Geospatial-Intelligence Agency (NGA) <a href="#">World Port Index (Pub 150)</a> contains the location and physical characteristics of, and the facilities and services offered by major ports and terminals world-wide (approximately 3700 entries).
<b>Example Values</b>	<b>Port of NY/NJ:</b> Large <b>Port of Providence, RI:</b> Medium

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

---

Number of Storm Events

Shortname / Alias: Number of Storm Events

2)

<b>Indicator</b>	<b>Number of Storm Events</b>
<b>Units</b>	Number of Events

<b>Description</b>	Number of storm events in the port county since 1950 that resulted in property damage > \$1 Million
<b>Data Source</b>	<p>The <a href="#">NOAA Storm Events Database</a> is an official publication of the National Oceanic and Atmospheric Administration (NOAA) which documents the occurrence of storms and other significant weather phenomena having sufficient intensity to cause loss of life, injuries, significant property damage, and/or disruption to commerce. National Centers for Environmental Information (NCEI) Storm Events Database contains the records used to create the official NOAA <a href="#">Storm Data publication</a>, documenting:</p> <ul style="list-style-type: none"> <li>a. The occurrence of storms and other significant weather phenomena having sufficient intensity to cause loss of life, injuries, significant property damage, and/or disruption to commerce;</li> <li>b. Rare, unusual, weather phenomena that generate media attention, such as snow flurries in South Florida or the San Diego coastal area; and</li> <li>c. Other significant meteorological events, such as record maximum or minimum temperatures or precipitation that occur in connection with another event.</li> </ul> <p>NCEI receives Storm Data from the National Weather Service.</p>
<b>Example Values</b>	<b>Port of Boston, MA</b> (Suffolk County): 11 Events <b>Searsport, ME</b> (Waldo County): 4 Events

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

Average Cost of Storm Events

Shortname / Alias: Average Cost of Storm Events



3)

<b>Indicator</b>	<b>Average Cost of Storm Events</b>
<b>Units</b>	\$ Millions USD
<b>Description</b>	Average cost of property damage from storm events in the port county since 1950 with property damage > \$1 Million
<b>Data Source</b>	<p>The <a href="#">NOAA Storm Events Database</a> is an official publication of the National Oceanic and Atmospheric Administration (NOAA) which documents the occurrence of storms and other significant weather phenomena having sufficient intensity to cause loss of life, injuries, significant property damage, and/or disruption to commerce. National Centers for Environmental Information (NCEI) Storm Events Database contains the records used to create the official NOAA <a href="#">Storm Data publication</a>, documenting:</p> <ul style="list-style-type: none"> <li>a. The occurrence of storms and other significant weather phenomena having sufficient intensity to cause loss of life, injuries, significant property damage, and/or disruption to commerce;</li> <li>b. Rare, unusual, weather phenomena that generate media attention, such as snow flurries in South Florida or the San Diego coastal area; and</li> <li>c. Other significant meteorological events, such as record maximum or minimum temperatures or precipitation that occur in connection with another event.</li> </ul> <p>NCEI receives Storm Data from the National Weather Service.</p>
<b>Example Values</b>	<b>Port of Boston, MA</b> (Suffolk County): \$5.92 Million <b>Searsport, ME</b> (Waldo County): \$7.05 Million

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

Hundred Year High Water

Shortname / Alias: Hundred Year High Water

4)

<b>Indicator</b>	<b>Hundred Year High Water</b>
<b>Units</b>	Meters above mean higher high water (MHHW)
<b>Description</b>	1% annual exceedance probability high water level which corresponds to the level that would be exceeded one time per century, for the nearest NOAA tide station to the port
<b>Data Source</b>	<a href="#">NOAA Extreme Water Levels</a> Extremely high or low water levels at coastal locations are an important public concern and a factor in coastal hazard assessment, navigational safety, and ecosystem management. Exceedance probability, the likelihood that water levels will exceed a given elevation, is based on a statistical analysis of historic values.  The <a href="#">Extreme Water Levels product</a> provides web-based access to Exceedance Probability Statistics at approximately 110 NOAA Center for Operational Oceanographic Products and Services (CO-OPS) water level stations with at least 30 years of water level observations.
<b>Example Values</b>	<b>Port of Boston, MA:</b> 1.40 meters above MHHW <b>Providence, RI:</b> 2.73 meters above MHHW

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

Hundred Year Low Water

Shortname / Alias: Hundred Year Low Water

5)

<b>Indicator</b>	<b>Hundred Year Low Water</b>
<b>Units</b>	Meters below Mean Lower Low Water (MLLW)
<b>Description</b>	1% annual exceedance probability low water level for the nearest NOAA tide station to the port, which corresponds to the level that would be exceeded one time per century.
<b>Data Source</b>	<p><a href="#">NOAA Extreme Water Levels</a></p> <p>Extremely high or low water levels at coastal locations are an important public concern and a factor in coastal hazard assessment, navigational safety, and ecosystem management. Exceedance probability, the likelihood that water levels will exceed a given elevation, is based on a statistical analysis of historic values.</p> <p>The <a href="#">Extreme Water Levels product</a> provides web-based access to Exceedance Probability Statistics at approximately 110 NOAA Center for Operational Oceanographic Products and Services (CO-OPS) water level stations with at least 30 years of water level observations.</p>
<b>Example Values</b>	<p><b>Fall River, MA:</b> 0.77 meters below MLLW</p> <p><b>Penn Manor, PA:</b> 1.72 meters below MLLW</p>

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

Number of Cyclones

Shortname / Alias: Number of Cyclones

6)

<b>Indicator</b>	<b>Number of Cyclones</b>
<b>Units</b>	Number of cyclones

<b>Description</b>	Number of cyclones that have passed within 100 (nm) of the port since 1842.
<b>Data Source</b>	<a href="#">NOAA Historical Hurricane Tracks Tool</a> Storm track information is available from 1842 through the previous year's storms. The storm track data are from the NOAA National Climatic Data Center's International Best Track Archive for Climate Stewardship (IBTrACS) data set and the NOAA National Weather Service HURDAT2 data set.
<b>Example Values</b>	<b>Norfolk, VA:</b> 116 cyclones <b>Albany, NY:</b> 28 cyclones

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

Sea Level Trend

Shortname / Alias: Sea Level Trend

7)

<b>Indicator</b>	<b>Sea Level Trend</b>
<b>Units</b>	millimeters per year (mm/yr)
<b>Description</b>	Local Mean Sea Level Trend
<b>Data Source</b>	<a href="#">NOAA Tides and Currents- Sea Level Trends</a> The Center for Operational Oceanographic Products and Services has been measuring sea level for over 150 years, with tide stations of the <a href="#">National Water Level Observation Network</a> operating on all U.S. coasts. Changes in Mean Sea Level (MSL), either a sea level rise or sea level fall, have been computed at 142 long-term water level stations using a minimum span of 30 years of observations at each location. These measurements have been averaged by month to remove the effect of higher frequency phenomena in order to compute an accurate linear sea level trend.

	<p>Tide stations measure <b>Local Sea Level</b>, which refers to the height of the water as measured along the coast relative to a specific point on land. Water level measurements at tide stations are referenced to stable vertical points (or bench marks) on the land and a known relationship is established. However, <b>the measurements at any given tide station include both global sea level rise and vertical land motion</b>, such as subsidence, glacial rebound, or large-scale tectonic motion. Because the heights of both the land and the water are changing, the land-water interface can vary spatially and temporally and must be defined over time. Depending on the rates of vertical land motion relative to changes in sea level, observed local sea level trends may differ greatly from the average rate of global sea level rise, and vary widely from one location to the next.</p> <p>Relative Sea Level Trends reflect changes in local sea level over time and are typically the most critical sea level trend for many coastal applications, including coastal mapping, marine boundary delineation, coastal zone management, coastal engineering, sustainable habitat restoration design, and the general public enjoying their favorite beach. This website focuses on relative sea level trends, computed from monthly averages of hourly water levels observed at specific tide stations, called monthly mean sea level.</p>
<b>Example Values</b>	<p><b>Norfolk, VA:</b> 4.6 mm/yr</p> <p><b>Portland, ME:</b> 1.9 mm/yr</p>

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

---

Number of Disasters

Shortname / Alias: Number of Disasters

8)

<b>Indicator</b>	<b>Number of Disasters</b>
<b>Units</b>	Number of Disaster Declarations
<b>Description</b>	Number of Presidential Disaster Declarations for the port county since 1953
<b>Data Source</b>	<a href="#">FEMA Historical Disaster Declarations</a> FEMA Disaster Declarations Summary is a summarized dataset describing all federally declared disasters. This information begins with the first disaster declaration in 1953 and features all three disaster declaration types: major disaster, emergency and fire management assistance.
<b>Example Values</b>	<b>Providence, RI</b> (Providence County): 18 disaster declarations <b>Portland, ME</b> (Cumberland County): 33 disaster declarations

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

Disaster Housing Assistance

Shortname / Alias: Disaster Housing Assistance

9)

<b>Indicator</b>	<b>Disaster Housing Assistance</b>
<b>Units</b>	\$ Millions of USD
<b>Description</b>	The total disaster housing assistance of Presidential Disaster Declarations in the port county since 1953
<b>Data Source</b>	<a href="#">FEMA Historical Disaster Declarations</a> FEMA Disaster Declarations Summary is a summarized dataset describing all federally declared disasters. This information

	<p>begins with the first disaster declaration in 1953 and features all three disaster declaration types: major disaster, emergency and fire management assistance.</p> <p>Disaster housing assistance funds are available through FEMA's Individual and Household Program.</p>
<b>Example Values</b>	<p><b>Providence, RI</b> (Providence County): \$9.98 Million</p> <p><b>Portland, ME</b> (Cumberland County): \$0.0</p>

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

Projected Change in Days Above Baseline Extremely Hot Temperature

Shortname / Alias: Projected Change in Days Above Baseline Extremely Hot Temperature

10)

<b>Indicator</b>	<b>Projected Change in Days Above Baseline Extremely Hot Temperature</b>
<b>Units</b>	%
<b>Description</b>	<p>The <b>percent change</b> from observed baseline of the <b>average number of days per year above baseline “Extremely Hot” temperature</b> projected for the end-of-century, downscaled to 12km resolution for the port location.</p> <p>“<b>Extremely Hot</b>” Day Temperature defined as 99th Percentile Temp</p>
<b>Data Source</b>	<p><a href="#">US DOT CMIP Climate Data Processing Tool</a></p> <p>The purpose of the U.S. DOT CMIP Climate Data Processing Tool is to process readily available downscaled climate data at the local level into relevant statistics for transportation planners.</p>

	<p>This tool works with data from the U.S. Bureau of Reclamation's Downscaled CMIP3 and CMIP5 Climate and Hydrology Projections (DCHP) website, available at <a href="http://gdo-dcp.ucllnl.org/downscaled_cmip_projections">http://gdo-dcp.ucllnl.org/downscaled_cmip_projections</a>. This website houses climate model data from phase 3 (CMIP3) and phase 5 (CMIP5) of the World Climate Research Programme's (WCRP) Coupled Model Intercomparison Project (CMIP).</p> <p>The Coupled Model Intercomparison Project (CMIP) Climate Data Processing Tool, developed by the U.S. Department of Transportation, will process raw climate model outputs from the World Climate Research Programme's CMIP3 and CMIP5 into relevant statistics for transportation planners. These statistics include changes in the frequency of very hot days and extreme precipitation events and other climate characteristics that may affect transportation infrastructure and services by the middle and end of the century.</p>
<b>Example Values</b>	<p><b>Providence, RI:</b> 440 % increase</p> <p><b>Portland, ME:</b> 220 % increase</p>

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

---

### Projected Change in Number of Extremely Heavy Precipitation Events

Shortname / Alias: Projected Change in Number of Extremely Heavy Precipitation Events

11)

<b>Indicator</b>	<b>Projected Change in Number of Extremely Heavy Precipitation Events</b>
<b>Units</b>	%



<b>Description</b>	<p>The <b>percent change</b> from observed baseline of the <b>average number of “Extremely Heavy” Precipitation Events</b> projected for the end-of-century, downscaled to 12km resolution for the port location.</p> <p><b>"Extremely Heavy" Precipitation Events</b> &gt;= (1.5 inches in 24 hrs)</p>
<b>Data Source</b>	<p><a href="#">US DOT CMIP Climate Data Processing Tool</a></p> <p>The purpose of the U.S. DOT CMIP Climate Data Processing Tool is to process readily available downscaled climate data at the local level into relevant statistics for transportation planners.</p> <p>This tool works with data from the U.S. Bureau of Reclamation’s Downscaled CMIP3 and CMIP5 Climate and Hydrology Projections (DCHP) website, available at <a href="http://gdo-dcp.ucllnl.org/downscaled_cmip_projections">http://gdo-dcp.ucllnl.org/downscaled_cmip_projections</a>. This website houses climate model data from phase 3 (CMIP3) and phase 5 (CMIP5) of the World Climate Research Programme’s (WCRP) Coupled Model Intercomparison Project (CMIP).</p> <p>The Coupled Model Intercomparison Project (CMIP) Climate Data Processing Tool, developed by the U.S. Department of Transportation, will process raw climate model outputs from the World Climate Research Programme's CMIP3 and CMIP5 into relevant statistics for transportation planners. These statistics include changes in the frequency of very hot days and extreme precipitation events and other climate characteristics that may affect transportation infrastructure and services by the middle and end of the century.</p>
<b>Example Values</b>	<p><b>Providence, RI:</b> 122 % increase</p> <p><b>Portland, ME:</b> 77 % increase</p>

<i>Exposure</i>	-100 _____ [ <input type="checkbox"/> ] _____ 100
<i>Sensitivity</i>	-100 _____ [ <input type="checkbox"/> ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ <input type="checkbox"/> ] _____ 100

Comments (Please also explain any extreme views):

---

Number of Endangered Species

Shortname / Alias: Number of Endangered Species

12)

<b>Indicator</b>	<b>Number of Endangered Species</b>
<b>Units</b>	Number of Species
<b>Description</b>	Number of Threatened or Endangered Species found in port county
<b>Data Source</b>	<a href="#">U.S. Fish &amp; Wildlife Service, Endangered Species</a> An endangered species is an animal or plant species in danger of extinction throughout all or a significant portion of its range.  A threatened species is an animal or plant species likely to become endangered within the foreseeable future throughout all or a significant portion of its range.
<b>Example Values</b>	<b>Providence, RI</b> (Providence County): 8 species <b>Portland, ME</b> (Cumberland County): 11 species

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

---

Number of Critical Habitat Areas

Shortname / Alias: Number of Critical Habitat Areas

13)

<b>Indicator</b>	<b>Number Critical Habitat Areas</b>
<b>Units</b>	Number of Areas

<b>Description</b>	Number of Critical Habitat Areas within 50 miles of the port
<b>Data Source</b>	<a href="#">U.S. Fish &amp; Wildlife Service, Critical Habitat Portal</a> Critical Habitat for Threatened & Endangered Species: A specific geographic area(s) that contains features essential for the conservation of a threatened or endangered species and that may require special management and protection and that have been formally designated by rule published in the Federal Register. <a href="#">Critical Habitat Online Mapper</a>
<b>Example Values</b>	<b>New Castle, DE:</b> 0 areas <b>Boston, MA:</b> 22 areas

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

Environmental *Sensitivity* Index (ESI)

Shortname / Alias: Environmental *Sensitivity* Index (ESI)

14)

<b>Indicator</b>	<b>ESI</b>
<b>Units</b>	ESI Rank (1.00 - 10.83; the higher the number, the <i>more sensitive</i> the shoreline is to an oil spill)
<b>Description</b>	Environmental <i>Sensitivity</i> Index (ESI) shoreline <i>sensitivity</i> to an oil spill. Using the ranking for the most sensitive shoreline within the port
<b>Data Source</b>	NOAA Office of Response and Restoration: <a href="#">ESI Shoreline Rankings</a> Environmental <i>Sensitivity</i> Index (ESI) maps use shoreline rankings to rate how sensitive an area of shoreline would be to an oil spill. The ranking scale goes from 1 to 10.  A rank of 1 represents shorelines with the <i>least susceptibility to damage</i> by oiling. Examples include steep, exposed rocky cliffs

	<p>and banks. The oil cannot penetrate into the rock and will be washed off quickly by the waves and tides.</p> <p>A rank of 10 represents shorelines <i>most likely to be damaged</i> by oiling. Examples include protected, vegetated wetlands, such as mangrove swamps and saltwater marshes. Oil in these areas will remain for a long period of time, penetrate deeply into the substrate, and inflict damage to many kinds of plants and animals.</p>
<b>Example Values</b>	<b>Philadelphia, PA: 1.25</b> <b>Albany, NY: 9.25</b>

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

---

Air Pollution Days

Shortname / Alias: Air Pollution Days

15)

<b>Indicator</b>	<b>Air Pollution Days</b>
<b>Units</b>	Number of days per year
<b>Description</b>	Number of days per year with Air Quality Index value greater than 100 for the port city, averaged over the past five years
<b>Data Source</b>	<p><a href="#">EPA Air Quality Index Report</a></p> <p>The Air Quality Index (AQI) provides information on pollutant concentrations of ground-level ozone, particulate matter, carbon monoxide, sulfur dioxide, and nitrogen dioxide. The AQI is based on pollutant concentration data measured by the State and Local Air Monitoring Stations network and by other special purpose monitors.</p> <p>For most pollutants in the index, the concentration is converted into index values between 0 and 500, “normalized” so that an</p>

	<p>index value of 100 represents the short-term, health-based standard for that pollutant as established by EPA (U.S. EPA, 1999).</p> <p><b>The higher the index value, the greater the level of air pollution and health risk.</b> An index value of 500 reflects a risk of imminent and substantial endangerment of public health. The level of the pollutant with the highest index value is reported as the AQI level for that day.</p> <p><b>An AQI value greater than 100 means that at least one criteria pollutant has reached levels at which people in sensitive groups may experience health effects.</b></p>
<b>Example Values</b>	<p><b>Philadelphia, PA:</b> 32 days per year</p> <p><b>Albany, NY:</b> 4 days per year</p>

Comments (Please also explain any extreme views):

Number of Hazmat Incidents

Shortname / Alias: Number of Hazmat Incidents

16)

<b>Indicator</b>	<b>Number of Hazmat Incidents</b>
<b>Units</b>	Number of Incidents
<b>Description</b>	Number of Hazardous Materials Incidents in port city since 2007
<b>Data Source</b>	<p><a href="#">U.S. DOT Pipeline and Hazardous Materials Safety Administration: Incident Statistics</a></p> <p>Hazardous material means a substance or material that the Secretary of Transportation has determined is capable of posing an unreasonable risk to health, safety, and property when transported in commerce, and has designated as hazardous under section 5103 of Federal hazardous materials transportation law (49 U.S.C. 5103).</p> <p>Each person in physical possession of a hazardous material at the time that any of the following incidents occurs during transportation (including loading, unloading, and temporary storage) must submit a Hazardous Materials Incident Report on DOT Form F 5800.1 (01/2004) within 30 days of discovery of the incident:</p>

	<p>An <a href="#">unintentional release</a> of a <a href="#">hazardous material</a> or the discharge of any quantity of hazardous waste;</p> <p>A specification <a href="#">cargo tank</a> with a capacity of 1,000 gallons or greater containing any <a href="#">hazardous material</a> suffers structural damage to the lading retention system or damage that requires repair to a system intended to protect the lading retention system, even if there is no release of <a href="#">hazardous material</a>;</p> <p>An <a href="#">undeclared hazardous material</a> is discovered; or</p> <p>A fire, violent rupture, explosion or dangerous evolution of heat (<i>i.e.</i>, an amount of heat sufficient to be dangerous to <a href="#">packaging</a> or personal safety to include charring of packaging, melting of packaging, scorching of packaging, or other evidence) occurs as a direct result of a battery or battery-powered device.</p> <p>Hazardous materials in various forms can cause death, serious injury, long-lasting health effects and damage to buildings, homes and other property. Many products containing hazardous chemicals are used and stored in homes routinely. These products are also shipped daily on the nation's highways, railroads, waterways and pipelines.</p>
<b>Example Values</b>	<p><b>Philadelphia, PA:</b> 1,981 incidents</p> <p><b>Camden, NJ:</b> 154 incidents</p>

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

Average Cost of Hazmat Incidents

Shortname / Alias: Average Cost of Hazmat Incidents

17)

Indicator	Average Cost of Hazmat Incidents
-----------	----------------------------------

<b>Units</b>	\$ USD
<b>Description</b>	Average cost per incident of total damage from the 10 most costly Hazardous Materials Incidents in the port city since 2007
<b>Data Source</b>	<p><a href="#">U.S. DOT Pipeline and Hazardous Materials Safety Administration: Incident Statistics</a></p> <p><b>Total Amount of Damages.</b> This figure includes the cost of the material lost, carrier damage, property damage, response costs, and remediation clean-up costs.</p> <p>Hazardous material means a substance or material that the Secretary of Transportation has determined is capable of posing an unreasonable risk to health, safety, and property when transported in commerce, and has designated as hazardous under section 5103 of Federal hazardous materials transportation law (49 U.S.C. 5103).</p> <p>Each person in physical possession of a hazardous material at the time that any of the following incidents occurs during transportation (including loading, unloading, and temporary storage) must submit a Hazardous Materials Incident Report on DOT Form F 5800.1 (01/2004) within 30 days of discovery of the incident:</p> <p>An <a href="#">unintentional release</a> of a <a href="#">hazardous material</a> or the discharge of any quantity of hazardous waste;</p> <p>A specification <a href="#">cargo tank</a> with a capacity of 1,000 gallons or greater containing any <a href="#">hazardous material</a> suffers structural damage to the lading retention system or damage that requires repair to a system intended to protect the lading retention system, even if there is no release of <a href="#">hazardous material</a>;</p> <p>An <a href="#">undeclared hazardous material</a> is discovered; or</p> <p>A fire, violent rupture, explosion or dangerous evolution of heat (<i>i.e.</i>, an amount of heat sufficient to be dangerous to <a href="#">packaging</a> or personal safety to include charring of packaging, melting of packaging, scorching of packaging, or other evidence) occurs as a direct result of a battery or battery-powered device.</p> <p>Hazardous materials in various forms can cause death, serious injury, long-lasting health effects and damage to buildings, homes and other property. Many products containing hazardous chemicals are used and stored in homes routinely. These products are also shipped daily on the nation's highways, railroads, waterways and pipelines.</p>

<b>Example Values</b>	<b>Port of NY/NJ: \$2,877,763 per incident</b> <b>Baltimore, MD: \$5,099,343 per incident</b>
-----------------------	--

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

Percent of Bridges Deficient

Shortname / Alias: Percent of Bridges Deficient

18)

<b>Indicator</b>	<b>Percent of Bridges that are Deficient</b>
<b>Units</b>	%
<b>Description</b>	Percent of bridges in the port county that are structurally deficient or functionally obsolete
<b>Data Source</b>	<p>U.S. DOT Federal Highway Administration: <a href="#">National Bridge Inventory: Deficient Bridges by County</a></p> <p>"Structurally deficient" means that the condition of the bridge includes a significant defect, which often means that speed or weight limits must be put on the bridge to ensure safety; a structural evaluation of 4 or lower qualifies a bridge as "structurally deficient". The designation can also apply if the approaches flood regularly.</p> <p>"Functionally obsolete" means that the design of a bridge is not suitable for its current use, such as lack of safety shoulders or the inability to handle current traffic volume, speed, size, or weight.</p>



<b>Example Values</b>	<b>Philadelphia, PA</b> (Philadelphia County): 22.50 % <b>Baltimore, MD</b> (Baltimore-City County): 3.46 %
-----------------------	--

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

Shelter Afforded

Shortname / Alias: Shelter Afforded

19)

<b>Indicator</b>	<b>Shelter</b>
<b>Units</b>	Excellent (5), Good (4), Fair (3), Poor (2), None (1)
<b>Description</b>	Shelter afforded from wind, sea, and swell
<b>Data Source</b>	<p>The National Geospatial-Intelligence Agency (NGA) <a href="#">World Port Index (Pub 150)</a> contains the location and physical characteristics of, and the facilities and services offered by major ports and terminals world-wide (approximately 3700 entries).</p> <p>The <b>shelter afforded</b> from wind, sea, and swell, refers to the area where normal port operations are conducted, usually the wharf area. Shelter afforded the anchorage area is given for ports where cargo is handled by lighters.</p>
<b>Example Values</b>	<b>New Haven, CT:</b> Good (4) <b>Boston, MA:</b> Excellent (5)

<i>Exposure</i>	-100 _____ [ ] _____ 100
-----------------	--------------------------

<i>Sensitivity</i>	-100 _____ [ ] _____	100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____	100

Comments (Please also explain any extreme views):

---

Entrance Restrictions

Shortname / Alias: Entrance Restrictions

20)

<b>Indicator</b>	<b>Number of Entrance Restrictions</b>
<b>Units</b>	Number of entrance restrictions (Tide, Swell, Ice, Other, or None)
<b>Description</b>	Entrance Restrictions are natural factors restricting the entrance of vessels, such as ice, heavy swell, etc.
<b>Data Source</b>	The National Geospatial-Intelligence Agency (NGA) <a href="#">World Port Index (Pub 150)</a> contains the location and physical characteristics of, and the facilities and services offered by major ports and terminals world-wide (approximately 3700 entries).  <b>Entrance Restrictions</b> are natural factors restricting the entrance of vessels, such as ice, heavy swell, etc.
<b>Example Values</b>	<b>Port of NY/NJ:</b> 1 (Tide) <b>Boston, MA:</b> 0 (None)

<i>Exposure</i>	-100 _____ [ ] _____	100
<i>Sensitivity</i>	-100 _____ [ ] _____	100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____	100

Comments (Please also explain any extreme views):

---

20 Candidate Indicators Evaluated, Thank You!

21) You have evaluated 20 candidate indicators so far, thank you!

Though 14 additional candidate indicators remain to be evaluated, we understand your time is valuable.

If you prefer to skip ahead to the final section of this survey you may do so by selecting the appropriate choice below:

☐ Yes, I can evaluate the remaining 14 candidate indicators.

☐ No, I wish to skip ahead to the final section of this survey.

### Overhead Limits

Shortname / Alias: Overhead Limits

22)

<b>Indicator</b>	<b>Overhead Limits</b>
<b>Units</b>	Yes=1, No=0
<b>Description</b>	Overhead Limitations: indicates that bridge and overhead power cables exist.
<b>Data Source</b>	<p>The National Geospatial-Intelligence Agency (NGA) <a href="#">World Port Index (Pub 150)</a> contains the location and physical characteristics of, and the facilities and services offered by major ports and terminals world-wide (approximately 3700 entries).</p> <p>This entry is shown only to indicate that bridge and overhead power cables exist. It is advisable to refer to the chart for particulars.</p>
<b>Example Values</b>	<p><b>Port of NY/NJ:</b> 1 (Yes)</p> <p><b>Norfolk, VA:</b> 0 (No)</p>

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

### Channel Depth

Shortname / Alias: Channel Depth

23)

<b>Indicator</b>	<b>Channel Depth</b>
<b>Units</b>	A (over 76 ft) to Q (0 – 5 ft) in 5-foot increments
<b>Description</b>	The controlling depth of the principal or deepest channel at chart datum
<b>Data Source</b>	<p>The National Geospatial-Intelligence Agency (NGA) <a href="#">World Port Index (Pub 150)</a> contains the location and physical characteristics of, and the facilities and services offered by major ports and terminals world-wide (approximately 3700 entries).</p> <p>Depth information is generalized into 5-foot units, with the equivalents in meters, for the main channel, the main anchorage, and the principal cargo pier and/or oil terminal.</p> <p>Depths refer to chart datum. Depths are given in increments of 5 feet (1.5 meters) in order to lessen the number of changes when a small change in depth occurs.</p> <p>A depth of 31 feet (9.5 meters) would use letter “K,” a depth of 36 feet (11.0 meters) would use “J,” etc. The letter “K” means a least depth of 31 feet (9.5 meters) or greater, but not as great as 36 feet (11.0 meters).</p> <p><b>CHANNEL (controlling)</b>—The controlling depth of the principal or deepest channel at chart datum is given. The channel selected should lead up to the anchorage if within the harbor or to the wharf/pier. If the channel depth decreases from the anchorage to the wharf/pier and cargo can be worked at the anchorage, then the depth leading to the anchorage is taken.</p> <p>Large ports may have sub-ports (smaller) which have their own number and entry in the World Port Index. The controlling depth</p>

	<p>of the channel should refer to a smaller channel (if present) leading from the main channel into the sub-port facilities and anchorages.</p> <p>Note.—The depth of small shoals is not a controlling depth unless it limits the passage of vessels. For example, if a channel is charted as having a depth of 39 feet (11.9 meters), but there are small shoals noted or charted with depths of 30 feet (9.1 meters), then the controlling depth is still 39 feet (11.9 meters) unless a ship with a draft of 39 feet (12 meters) cannot pass around the shoals and navigate the channel safely.</p>
<b>Example Values</b>	<p><b>Wilmington, DE:</b> M (21 - 25 feet)</p> <p><b>Norfolk, VA:</b> H (41 - 45 feet)</p>

<i>Exposure</i>	-100 _____ [ <input type="checkbox"/> ] _____ 100
<i>Sensitivity</i>	-100 _____ [ <input type="checkbox"/> ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ <input type="checkbox"/> ] _____ 100

Comments (Please also explain any extreme views):

---

Pier Depth

Shortname / Alias: Pier Depth

24)

<b>Indicator</b>	<b>Pier Depth</b>
<b>Units</b>	A (over 76 ft) to Q (0 – 5 ft) in 5-foot increments
<b>Description</b>	The greatest depth at chart datum alongside the respective wharf/pier. If there is more than one wharf/pier, then the one which has greatest usable depth is shown.

<b>Data Source</b>	<p>The National Geospatial-Intelligence Agency (NGA) <a href="#">World Port Index (Pub 150)</a> contains the location and physical characteristics of, and the facilities and services offered by major ports and terminals world-wide (approximately 3700 entries).</p> <p>Depth information is generalized into 5-foot units, with the equivalents in meters, for the main channel, the main anchorage, and the principal cargo pier and/or oil terminal.</p> <p>Depths refer to chart datum. Depths are given in increments of 5 feet (1.5 meters) in order to lessen the number of changes when a small change in depth occurs.</p> <p>A depth of 31 feet (9.5 meters) would use letter “K,” a depth of 36 feet (11.0 meters) would use “J,” etc. The letter “K” means a least depth of 31 feet (9.5 meters) or greater, but not as great as 36 feet (11.0 meters).</p> <p><b>CARGO PIER/WHARF</b>—The greatest depth at chart datum alongside the respective wharf/pier is given. If there is more than one wharf/pier, then the one which has greatest usable depth is shown. For example, if there are three cargo/container piers with depths of 23 feet (7.0 meters), 33 feet (10.1 meters), and 43 feet (13.1 meters), then Code H, representing the deepest depth of 43 feet (13.1 meters), would be entered into the World Port Index.</p>
<b>Example Values</b>	<p><b>Baltimore, MD:</b> G (46 -51 feet)</p> <p><b>Paulsboro, NJ:</b> K (31 - 35 feet)</p>

<i>Exposure</i>	-100 _____ [ ] _____	100
<i>Sensitivity</i>	-100 _____ [ ] _____	100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____	100

Comments (Please also explain any extreme views):

Tide Range

Shortname / Alias: Tide Range

25)

<b>Indicator</b>	<b>Tide Range</b>
<b>Units</b>	Feet
<b>Description</b>	The mean tidal range at the port
<b>Data Source</b>	<p>The National Geospatial-Intelligence Agency (NGA) <a href="#">World Port Index (Pub 150)</a> contains the location and physical characteristics of, and the facilities and services offered by major ports and terminals world-wide (approximately 3700 entries).</p> <p><b>TIDES</b> —The mean range in meters is normally given for all ports outside of United States (U.S.) jurisdiction, but the mean rise is substituted if range data are not available. The distinction between range and rise can be disregarded without affecting the general utility of this publication.</p> <p>Note —The mean range is given in feet for all US ports and ports under U.S. jurisdiction (Trust Territories, etc.).</p>
<b>Example Values</b>	<p>Baltimore, MD: 1 foot</p> <p>Paulsboro, NJ: 6 feet</p>

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

### Marine Transportation Jobs

Shortname / Alias: Marine Transportation Jobs

26)

<b>Indicator</b>	<b>Marine Transportation Jobs</b>
<b>Units</b>	Number of jobs
<b>Description</b>	Number of Marine Transportation Jobs in the port county
<b>Data Source</b>	<p>The NOAA Office for Coastal Management: Economics: National Ocean Watch (<a href="#">ENOW</a>) <a href="#">ENOW Explorer</a> contains annual time-series data for over 400 coastal counties, 30 coastal states, 8 regions, and the nation, derived from the Bureau of Labor Statistics and the Bureau of Economic Analysis. It describes six economic sectors that depend on the oceans and Great Lakes and measures four economic indicators: Establishments, Employment, Wages, and Gross Domestic Product (GDP).</p> <p><b>Marine Transportation</b> includes deep sea freight, marine passenger transportation, pipeline transportation, marine transportation services, search and navigation equipment, and warehousing.</p>
<b>Example Values</b>	<p><b>Providence, RI</b> (Providence County): 979 jobs in 2013</p> <p><b>Searsport, ME</b> (Waldo County): 54 jobs in 2013</p>

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100



Comments (Please also explain any extreme views):

Marine Transportation Gross Domestic Product (GDP)

Shortname / Alias: Marine Transportation GDP

27)

<b>Indicator</b>	<b>Marine Transportation GDP</b>
<b>Units</b>	\$ Millions USD
<b>Description</b>	Gross Domestic Product of Marine Transportation in the port county
<b>Data Source</b>	<p>The NOAA Office for Coastal Management: Economics: National Ocean Watch (<a href="#">ENOW</a>) <a href="#">ENOW Explorer</a> contains annual time-series data for over 400 coastal counties, 30 coastal states, 8 regions, and the nation, derived from the Bureau of Labor Statistics and the Bureau of Economic Analysis. It describes six economic sectors that depend on the oceans and Great Lakes and measures four economic indicators: Establishments, Employment, Wages, and Gross Domestic Product (GDP).</p> <p><b>MARINE TRANSPORTATION</b></p> <p>Includes deep sea freight, marine passenger transportation, pipeline transportation, marine transportation services, search and navigation equipment, and warehousing.</p> <p><b>Gross Domestic Product (GDP)</b> represents the monetary value of all goods and services produced within a county's geographic borders over a specified period of time.</p>
<b>Example Values</b>	<p><b>Providence, RI</b> (Providence County): \$59.8 Million in 2013</p> <p><b>Searsport, ME</b> (Waldo County): \$4.5 Million in 2013</p>

Exposure -100 \_\_\_\_\_ [ ] \_\_\_\_\_ 100

<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

### Population Change

Shortname / Alias: Population Change

28)

<b>Indicator</b>	<b>Population Change</b>
<b>Units</b>	%
<b>Description</b>	Rate of population change (from 2000-2010) in the port county, expressed as a percent change
<b>Data Source</b>	<p>The NOAA Office for Coastal Management: <a href="#">Quick Report Tool for Socioeconomic Data</a> provides easy access to economic and demographic data for multiple coastal jurisdictions.</p> <p>Information is derived from several key socioeconomic sources, including the U.S. Census Bureau, Bureau of Economic Analysis, Bureau of Labor Statistics, and Federal Emergency Management Agency's Hazus database.</p> <p>In 2010, 123.3 million people, or 39 percent of the nation's population lived in Coastal Shoreline Counties. Population growth in these counties occurred at a lower rate than the nation as a whole from 1970 to 2010. The population in Coastal Shoreline Counties increased by 34.8 million people, a 39 percent increase, while the nation's entire population increased by 52 percent over the same time period.</p> <p>Within the limited space of the nation's coast, population density far exceeds the nation as a whole, and this trend will continue into the future. This situation presents coastal managers with the challenge of protecting both coastal ecosystems from a growing population and protecting a growing population from coastal hazards.</p> <p>The concentration of people impacts the integrity of coastal ecosystems, and at the same time, the lives and livelihoods of some of these residents and visitors can be at risk from natural</p>

	processes at the coast – such as hurricanes, erosion, and sea level rise.
<b>Example Values</b>	<b>Baltimore, MD</b> (Baltimore-City County): -4.64 % <i>decrease</i> <b>Gloucester, NJ</b> (Gloucester County): +13.20 % <i>increase</i>

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

Population Inside Floodplain

Shortname / Alias: Population Inside Floodplain

29)

<b>Indicator</b>	<b>Population Inside Floodplain</b>
<b>Units</b>	%
<b>Description</b>	Percent of the port county population living inside the FEMA Floodplain
<b>Data Source</b>	<p>NOAA Office for Coastal Management: <a href="#">Coastal County Snapshots</a>; based on <a href="#">2009-2013 American Community Survey 5-year Summary File data</a></p> <p><b>People + Floodplains = Not Good</b> The more homes and people located in a floodplain, the greater the potential for harm from flooding. Impacts are likely to be even greater when additional risk factors (age, income, capabilities) are involved, since people at greatest flood risk may have difficulty evacuating or taking action to reduce potential damage.</p> <p><b>Floodplain = 100 Year Flood Elevation = Base Flood Elevation (BFE):</b> The elevation shown on the <a href="#">Flood Insurance Rate Map</a> (FIRM) that indicates the water surface elevation</p>

	resulting from a flood that has a 1% chance of equaling or exceeding that level in any given year.
<b>Example Values</b>	<b>Wilmington, DE</b> (New Castle County): 8 % <b>Norfolk, VA</b> (Norfolk County): 18 %

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

SoVI® Social Vulnerability Score

Shortname / Alias: SoVI Social Vulnerability Score

30)

Indicator	SoVI® Score
<b>Units</b>	The SoVI® Social Vulnerability score is classified using standard deviations. Social vulnerability scores that are greater than 2 standard deviations above the mean are considered the most socially vulnerable, and scores below 2 standard deviations less than the mean are the least vulnerable.
<b>Description</b>	The SoVI® Social Vulnerability score of the port county
<b>Data Source</b>	University of South Carolina Hazards and Vulnerability Research Institute <a href="#">Social Vulnerability Index Data</a>  <b>Social Vulnerability</b> The hazards-of-place model ( <a href="#">Cutter 1996a</a> ) combines the biophysical vulnerability (physical characteristics of hazards and environment) and social vulnerability to determine an overall place vulnerability. Social vulnerability is represented as the social, economic, demographic, and housing characteristics that influence a community's ability to respond to, cope with, recover from, and adapt to environmental hazards.  <b>The Social Vulnerability Index (SoVI®)</b>

	<p>County-level socioeconomic and demographic data were used to construct an index of social vulnerability to environmental hazards, called the Social Vulnerability Index (SoVI®) for the United States <b>based on data collected from 2005 to 2009</b>.</p> <p>The majority of the sources used by the Hazards Research Lab are obtained from the five-year American Community Survey estimates compiled by the U.S. Census Bureau.</p> <p>After obtaining the relevant data, a principle components analysis is used to reduce the data into set of components. Slight adjustments are made to the components to ensure that the sign of the component loadings coincide with each individual population characteristic's influence on vulnerability. All components are added together to determine a numerical value that represents the social vulnerability for each county.</p>
<b>Example Values</b>	<p><b>Philadelphia, PA</b> (Philadelphia County): 3.418284 (High)</p> <p><b>Norfolk, VA</b> (Norfolk County): -0.207217 (Medium)</p>

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____ 100

Comments (Please also explain any extreme views):

Vessel Capacity

Shortname / Alias: Vessel Capacity

31)

<b>Indicator</b>	<b>Vessel Capacity</b>
<b>Units</b>	(Number of Vessel Calls) x (Vessel DWT)
<b>Description</b>	Annual vessel capacity at the port
<b>Data Source</b>	The U.S. DOT Maritime Administration: <a href="#">Vessel Calls in U.S. Ports, Selected Terminals and Lightering Areas</a> is a report containing a calculation of vessel calls for privately-owned,

	<p>oceangoing merchant vessels of all flags of registries over 1,000 gross tons (GT) calling at ports and selected ports/terminals within the contiguous United States, Hawaii, Alaska, Guam and Puerto Rico.</p> <p>Vessel Types: MARAD uses six vessel categories in this report: (1) Containerships, (2) Tanker, (3) Dry Bulk, (4) General Cargo, (5) Roll On – Roll Off (Ro-Ro), and (6) Gas.</p> <p><b>Calls</b> are calculated by how many times a vessel arrived at a port, facility or terminal. This number may include berth shifts, movement to and from an anchorage while awaiting cargo and may also include other activities related to vessel, port or terminal operations. Calls do not include vessels arriving at a designated anchorage area. In addition, vessels calling on a port may not necessary be engaged in onloading/offloading of cargoes.</p> <p><b>Capacity</b> is calculated as the sum of vessel calls weighted by vessel deadweight (DWT). DWT is defined as the total weight (metric tons) of cargo, fuel, fresh water, stores and crew which a ship can carry when immersed to its load line.</p>
<b>Example Values</b>	<p><b>Albany, NY:</b> 223,943,760 in 2015</p> <p><b>Fall River, MA:</b> 14,707,900 in 2015</p>

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

---

Tanker Capacity

Shortname / Alias: Tanker Capacity

32)

<b>Indicator</b>	<b>Tanker Capacity</b>
<b>Units</b>	(Number of Tanker Calls) x (Vessel DWT)

<b>Description</b>	Annual tanker capacity at the port <b>Tankers</b> – CO2, Chemical, Chemical/Oil, Wine, Vegetable Oil, Edible Oil, Beer, Latex, Crude Oil, Oil Products, Bitumen, Coal/Oil, Water, Fruit Juice, Molasses, Glue, Alcohol, and Caprolacatam.
<b>Data Source</b>	<p>The U.S. DOT Maritime Administration: <a href="#">Vessel Calls in U.S. Ports, Selected Terminals and Lightering Areas</a> is a report containing a calculation of vessel calls for privately-owned, oceangoing merchant vessels of all flags of registries over 1,000 gross tons (GT) calling at ports and selected ports/terminals within the contiguous United States, Hawaii, Alaska, Guam and Puerto Rico.</p> <p>Vessel Types: MARAD uses six vessel categories in this report: (1) Containerships, (2) Tanker, (3) Dry Bulk, (4) General Cargo, (5) Roll On – Roll Off (Ro-Ro), and (6) Gas.</p> <p><b>Calls</b> are calculated by how many times a vessel arrived at a port, facility or terminal. This number may include berth shifts, movement to and from an anchorage while awaiting cargo and may also include other activities related to vessel, port or terminal operations. Calls do not include vessels arriving at a designated anchorage area. In addition, vessels calling on a port may not necessary be engaged in onloading/offloading of cargoes.</p> <p><b>Capacity</b> is calculated as the sum of vessel calls weighted by vessel deadweight (DWT). DWT is defined as the total weight (metric tons) of cargo, fuel, fresh water, stores and crew which a ship can carry when immersed to its load line.</p>
<b>Example Values</b>	<p><b>Albany, NY:</b> 21,437,035 in 2015</p> <p><b>Fall River, MA:</b> 0 in 2015</p>

<i>Exposure</i>	-100	<input type="text"/>	100
<i>Sensitivity</i>	-100	<input type="text"/>	100
<i>Adaptive Capacity</i>	-100	<input type="text"/>	100

Comments (Please also explain any extreme views):

## Gas Carrier Capacity

Shortname / Alias: Gas Carrier Capacity

33)

<b>Indicator</b>	<b>Gas Capacity</b>
<b>Units</b>	(Number of Gas Carrier Calls) x (Vessel DWT)
<b>Description</b>	Annual gas carrier capacity at the port <b>Gas</b> – Liquefied Petroleum and Liquefied Natural Gas Carriers
<b>Data Source</b>	<p>The U.S. DOT Maritime Administration: <a href="#">Vessel Calls in U.S. Ports, Selected Terminals and Lightering Areas</a> is a report containing a calculation of vessel calls for privately-owned, oceangoing merchant vessels of all flags of registries over 1,000 gross tons (GT) calling at ports and selected ports/terminals within the contiguous United States, Hawaii, Alaska, Guam and Puerto Rico.</p> <p>Vessel Types: MARAD uses six vessel categories in this report: (1) Containerships, (2) Tanker, (3) Dry Bulk, (4) General Cargo, (5) Roll On – Roll Off (Ro-Ro), and (6) Gas.</p> <p><b>Calls</b> are calculated by how many times a vessel arrived at a port, facility or terminal. This number may include berth shifts, movement to and from an anchorage while awaiting cargo and may also include other activities related to vessel, port or terminal operations. Calls do not include vessels arriving at a designated anchorage area. In addition, vessels calling on a port may not necessary be engaged in onloading/offloading of cargoes.</p> <p><b>Capacity</b> is calculated as the sum of vessel calls weighted by vessel deadweight (DWT). DWT is defined as the total weight (metric tons) of cargo, fuel, fresh water, stores and crew which a ship can carry when immersed to its load line.</p>
<b>Example Values</b>	<p><b>Boston, MA:</b> 284,802 in 2015</p> <p><b>Port of NY/NJ:</b> 6,424 in 2015</p>

<i>Exposure</i>	-100 _____ [ ] _____ 100
<i>Sensitivity</i>	-100 _____ [ ] _____ 100



Adaptive Capacity -100 \_\_\_\_\_ [ ] \_\_\_\_\_ 100

Comments (Please also explain any extreme views):

### Containership Capacity

Shortname / Alias: Containership Capacity

34)

<b>Indicator</b>	<b>Containership Capacity</b>
<b>Units</b>	(Number of Containership Calls) x (Vessel DWT)
<b>Description</b>	Annual containership capacity at the port <b>Containership</b> – Container Ship and Passenger/Container Ships
<b>Data Source</b>	<p>The U.S. DOT Maritime Administration: <a href="#">Vessel Calls in U.S. Ports, Selected Terminals and Lightering Areas</a> is a report containing a calculation of vessel calls for privately-owned, oceangoing merchant vessels of all flags of registries over 1,000 gross tons (GT) calling at ports and selected ports/terminals within the contiguous United States, Hawaii, Alaska, Guam and Puerto Rico.</p> <p>Vessel Types: MARAD uses six vessel categories in this report: (1) Containerships, (2) Tanker, (3) Dry Bulk, (4) General Cargo, (5) Roll On – Roll Off (Ro-Ro), and (6) Gas.</p> <p><b>Calls</b> are calculated by how many times a vessel arrived at a port, facility or terminal. This number may include berth shifts, movement to and from an anchorage while awaiting cargo and may also include other activities related to vessel, port or terminal operations. Calls do not include vessels arriving at a designated anchorage area. In addition, vessels calling on a port may not necessary be engaged in onloading/offloading of cargoes.</p> <p><b>Capacity</b> is calculated as the sum of vessel calls weighted by vessel deadweight (DWT). DWT is defined as the total weight (metric tons) of cargo, fuel, fresh water, stores and crew which a ship can carry when immersed to its load line.</p>
<b>Example Values</b>	<b>Hampton Roads, VA:</b> 104,862,259,278 in 2015 <b>Providence, RI:</b> 0 in 2015

<i>Exposure</i>	-100 _____ [ ] _____	100
<i>Sensitivity</i>	-100 _____ [ ] _____	100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____	100

Comments (Please also explain any extreme views):

Tonnage

Shortname / Alias: Tonnage

35)

<b>Indicator</b>	<b>Tonnage</b>
<b>Units</b>	Short Tons
<b>Description</b>	Total Annual Throughput at the port
<b>Data Source</b>	<p>USACE Navigation Data Center: <a href="#">Principal Ports of the United States</a></p> <p>The Principal Port file contains USACE port codes, geographic locations (longitude, latitude), names, and commodity tonnage summaries (total tons, domestic, foreign, imports and exports) for Principal USACE Ports.</p> <p>The ports are politically defined by port limits or Corps projects, excluding non-Corps projects not authorized for publication. The determination for the published Principal Ports is based upon the total tonnage for the port for the particular year; therefore, the top 150 list can vary from year to year.</p>
<b>Example Values</b>	<p><b>Port of NY/NJ:</b> 126,690,317 tons in 2015</p> <p><b>Providence, RI:</b> 8,043,051 tons in 2015</p>

<i>Exposure</i>	-100 _____ [ ] _____	100
<i>Sensitivity</i>	-100 _____ [ ] _____	100
<i>Adaptive Capacity</i>	-100 _____ [ ] _____	100

Comments (Please also explain any extreme views):

---

#### Most Vulnerable Ports

Shortname / Alias: Most Vulnerable Ports

Where are the highest levels of climate vulnerability? The degree to which a system is susceptible to, and unable to cope with, adverse effects of climate change, including climate variability and extremes. Vulnerability is a function of the character, magnitude, and rate of climate change and variation to which a system is exposed, its *sensitivity*, and its *adaptive capacity* among the principal ports of the USACE United States Army Corps of Engineers North Atlantic Division?

## Appendix J: Expert Elicitation Results; Indicator Evaluation

Figure J-1. Federal expert-perceived correlations with the components of vulnerability.

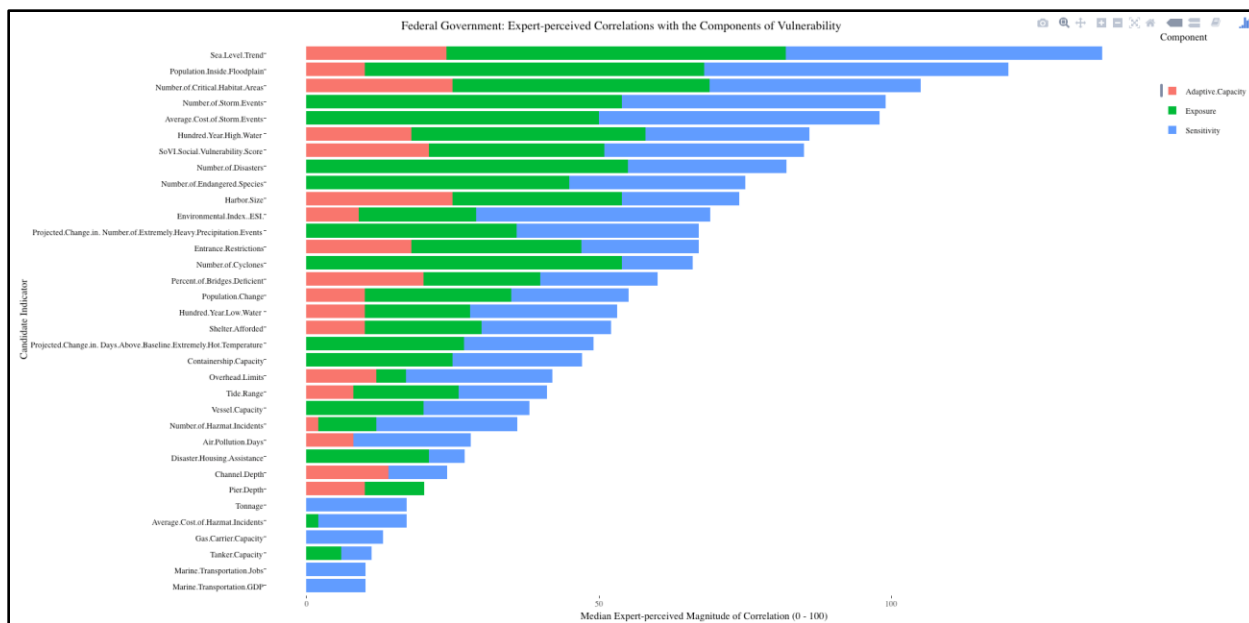


Figure J-2. Academics expert-perceived correlations with the components of vulnerability.

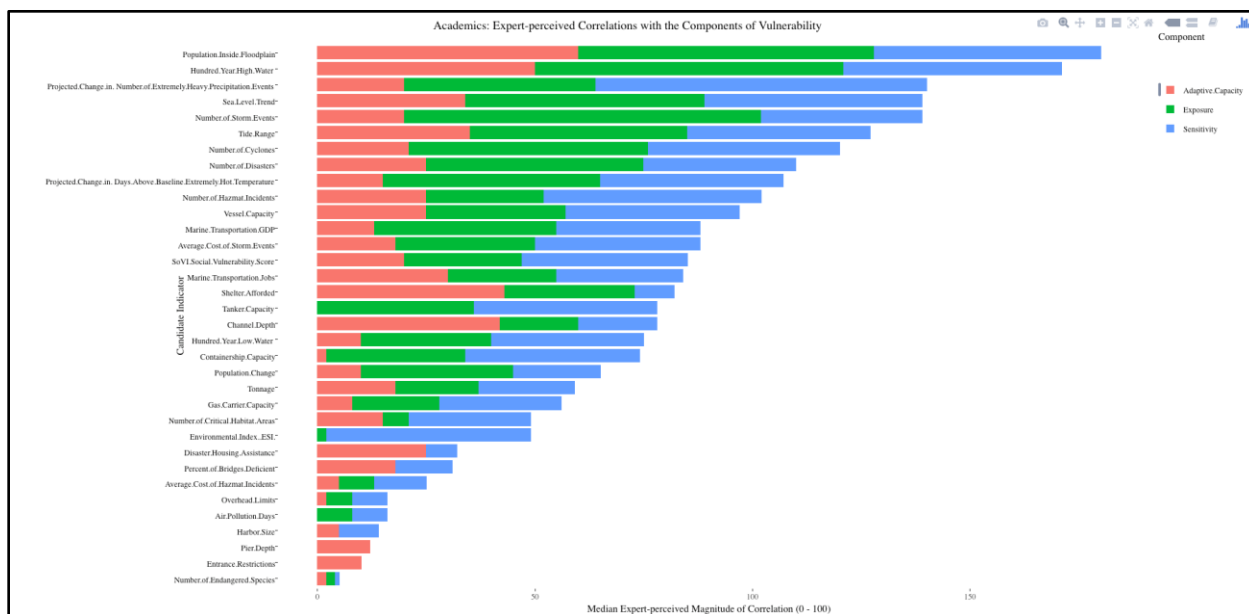


Figure J-3. Consultants expert-perceived correlations with the components of vulnerability.

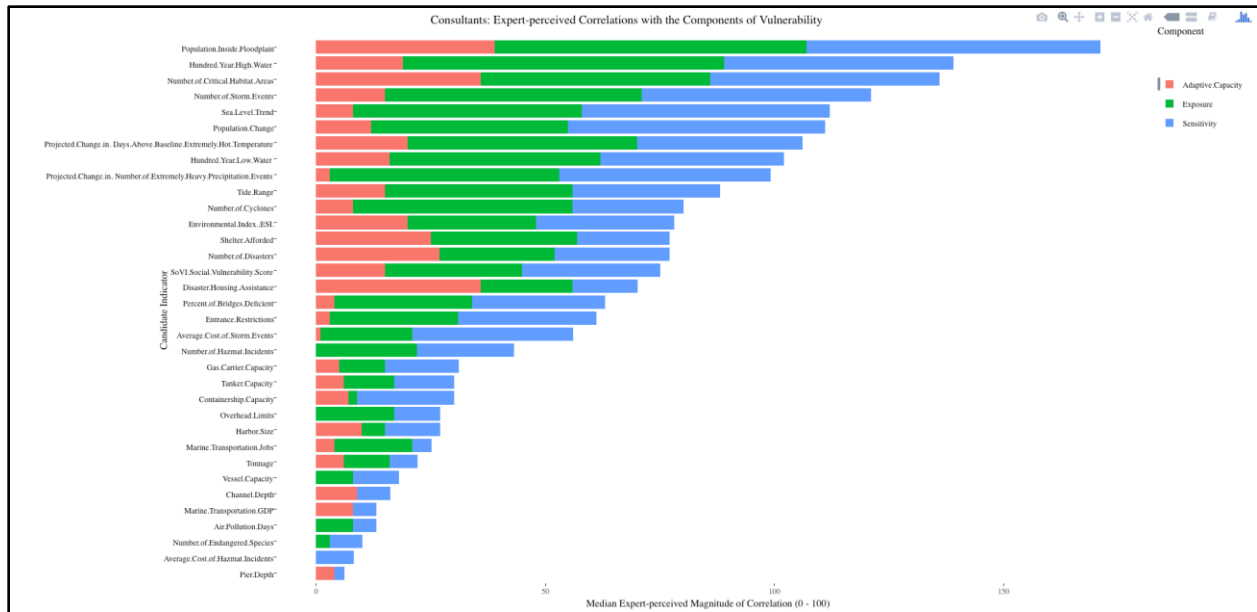


Figure J-4. Practitioners expert-perceived correlations with the components of vulnerability.


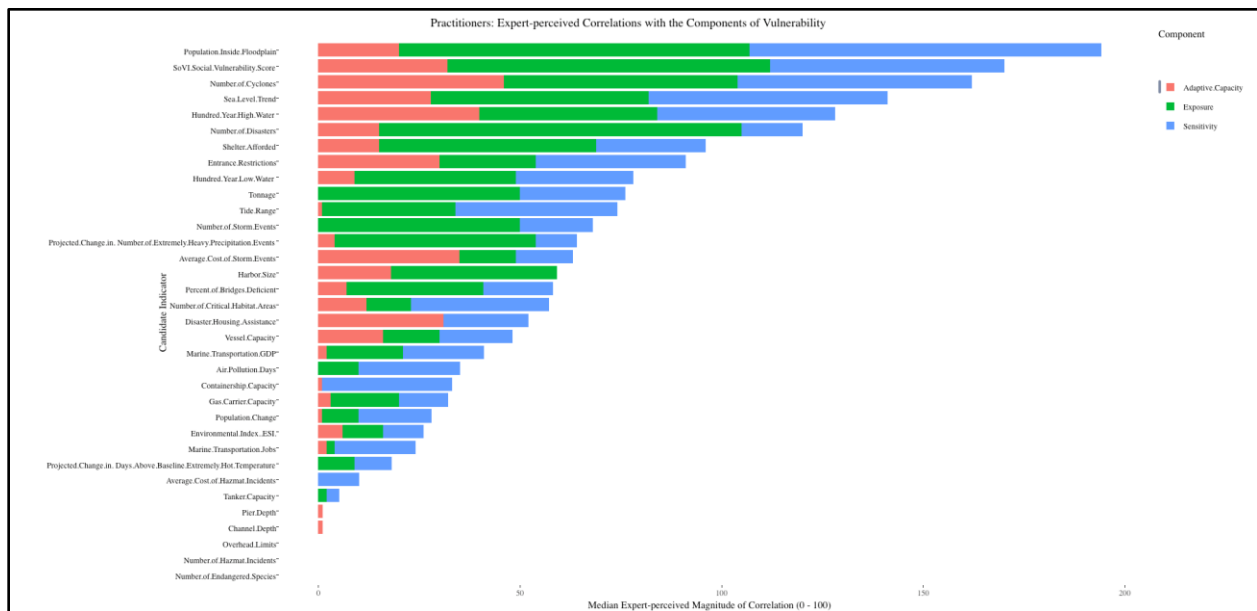


Figure J-5. Others expert-perceived correlations with the components of vulnerability.

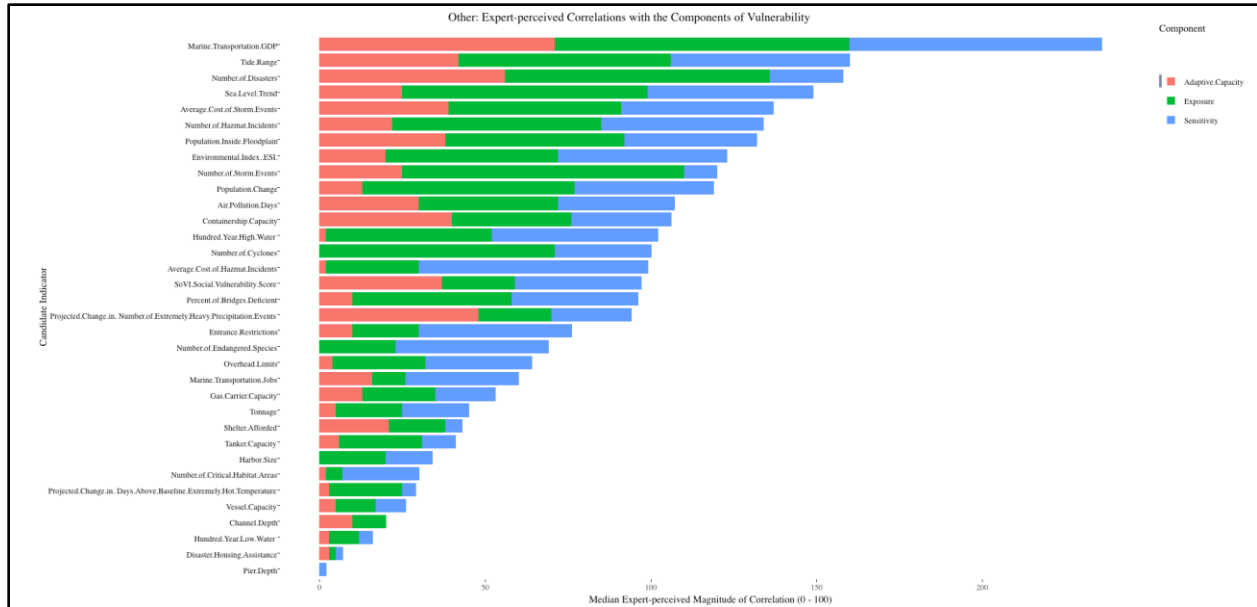

## Appendix K: Webinar Slides for the Visual Analogue Scale (VAS) Selection

### Weighting Indicators of Seaport Vulnerabilities to Climate & Extreme Weather Impacts

Webinar, May 2017

R. Duncan McIntosh, PhD  
Austin Becker, PhD  
Elizabeth Mclean, PhD



THE  
UNIVERSITY  
OF RHODE ISLAND  
DEPARTMENT OF  
MARINE AFFAIRS



### Required Materials:

1. **Data Dictionary:**  
link in webinar chat:  
<https://goo.gl/cMe467>
2. Your **four digit code:**  
from your invitation email



## Study Area:

- Ports of the USACE North Atlantic Division (map)
- Vulnerabilities include ports' surrounding socioeconomic and environmental systems



## Invitation Link:

Click the **invitation link**  
in the webinar chat

4



## Logging In:

1. **Do not** “Log In” or “Register” (upper right)
2. Enter your **four digit code** in the box labeled “Your Name:”
3. Click “check input” then click “Go”

## Weighting the Components of Seaport Climate Vulnerability

1. Click the red **AHP** box next to “Seaport Climate Vulnerability”
- **Vulnerability:** The degree to which a system is susceptible to, and unable to cope with, adverse effects of climate change, including climate variability and extremes. Vulnerability is a function of the character, magnitude, and rate of climate change and variation to which a system is **exposed**, its **sensitivity**, and its **adaptive capacity**.

## Pairwise Comparisons:

With respect to *Seaport Climate Vulnerability*, which criterion is more important, and how much more on a scale 1 to 9?

1. Refer to Data Dictionary (p. 5) for definitions
2. For each pair, indicate which is more important
3. Then, indicate how much more (1 – 9)
4. Click “**Check Consistency**,” & adjust your responses if necessary
5. Click “**Submit\_Priorities**”

A - wrt Seaport Climate Vulnerability - or B?	Equal	How much more?
1 <input checked="" type="radio"/> Adaptive Capacity or <input type="radio"/> Exposure	<input checked="" type="radio"/> 1	<input type="radio"/> 2 <input type="radio"/> 3 <input type="radio"/> 4 <input type="radio"/> 5 <input type="radio"/> 6 <input type="radio"/> 7 <input type="radio"/> 8 <input type="radio"/> 9
2 <input checked="" type="radio"/> Adaptive Capacity or <input type="radio"/> Sensitivity	<input checked="" type="radio"/> 1	<input type="radio"/> 2 <input type="radio"/> 3 <input type="radio"/> 4 <input type="radio"/> 5 <input type="radio"/> 6 <input type="radio"/> 7 <input type="radio"/> 8 <input type="radio"/> 9
3 <input type="radio"/> Exposure or <input type="radio"/> Sensitivity	<input checked="" type="radio"/> 1	<input type="radio"/> 2 <input type="radio"/> 3 <input type="radio"/> 4 <input type="radio"/> 5 <input type="radio"/> 6 <input type="radio"/> 7 <input type="radio"/> 8 <input type="radio"/> 9

CR = 0% Please start pairwise comparison

☒ AHP ☐ Balanced scale

7

## Check Consistency:

The most *inconsistent* responses are highlighted **red**, **orange**, **yellow**;  
More consistent response choices highlighted in **green**.

**To improve consistency:**

1. Slightly adjust highlighted judgments by plus or minus one or two points in the scale; then “**Check Consistency**” again
2. Repeat these adjustments as necessary (or until CR < 10%)

With respect to *Seaport Climate Vulnerability*, which criterion is more important, and how much more on a scale 1 to 9?

A - wrt Seaport Climate Vulnerability - or B?	Equal	How much more?
1 <input type="radio"/> Adaptive Capacity or <input checked="" type="radio"/> Exposure	<input checked="" type="radio"/> 1	<input type="radio"/> 2 <input type="radio"/> 3 <input type="radio"/> 4 <input type="radio"/> 5 <input type="radio"/> 6 <input type="radio"/> 7 <input type="radio"/> 8 <input type="radio"/> 9
2 <input checked="" type="radio"/> Adaptive Capacity or <input type="radio"/> Sensitivity	<input checked="" type="radio"/> 1	<input type="radio"/> 2 <input type="radio"/> 3 <input type="radio"/> 4 <input type="radio"/> 5 <input type="radio"/> 6 <input type="radio"/> 7 <input type="radio"/> 8 <input type="radio"/> 9
3 <input type="radio"/> Exposure or <input type="radio"/> Sensitivity	<input checked="" type="radio"/> 1	<input type="radio"/> 2 <input type="radio"/> 3 <input type="radio"/> 4 <input type="radio"/> 5 <input type="radio"/> 6 <input type="radio"/> 7 <input type="radio"/> 8 <input type="radio"/> 9

CR = 333.9% Adjust highlighted judgments to improve consistency

☒ AHP ☐ Balanced scale

## Weighting the Indicators of Seaport Climate Exposure

1. Click the red **AHP** box next to “Exposure”

Seaport Climate Vulnerability [AHP]

Adaptive Capacity 0.3333

Exposure 0.3333 [AHP]

Sensitivity 0.3333 [AHP]

Number of Disasters 0.1667

Number of Cyclones 0.1667

Number of Storm Events 0.1667

Hundred Year High Water 0.1667

Projected Change in Extreme Precip 0.1667

Population inside Floodplain 0.1667

Average Cost of Storm Events 0.1667

Number Critical Habitat Areas 0.1667

Soil Social Vulnerability Score 0.1667

Population Change 0.1667

Environmental Sensitivity Index ESI 0.1667

## Pairwise Comparisons:

With respect to *Seaport Climate Exposure*, which criterion is more important, and how much more on a scale 1 to 9?

1. Refer to Data Dictionary for descriptions of indicators
2. For each pair, indicate which is more important
3. Then, indicate how much more (1 – 9)
4. Click “**Check Consistency**,” & adjust your responses if necessary
5. Click “**Submit\_Priorities**”

	A – sea Exposure – or B?	Equal	How much more?
1	* Sea Level Trend or * Number of Disasters	* 1	2 3 4 5 6 7 8 9
2	* Sea Level Trend or * Number of Cyclones	* 1	2 3 4 5 6 7 8 9
3	* Sea Level Trend or * Number of Storm Events	* 1	2 3 4 5 6 7 8 9
4	* Sea Level Trend or * Hundred Year High Water	* 1	2 3 4 5 6 7 8 9
5	* Sea Level Trend or * Projected Change in Extreme Precip	* 1	2 3 4 5 6 7 8 9
6	* Number of Disasters or * Number of Cyclones	* 1	2 3 4 5 6 7 8 9
7	* Number of Disasters or * Number of Storm Events	* 1	2 3 4 5 6 7 8 9
8	* Number of Disasters or * Hundred Year High Water	* 1	2 3 4 5 6 7 8 9
9	* Number of Disasters or * Projected Change in Extreme Precip	* 1	2 3 4 5 6 7 8 9
10	* Number of Cyclones or * Number of Storm Events	* 1	2 3 4 5 6 7 8 9
11	* Number of Cyclones or * Hundred Year High Water	* 1	2 3 4 5 6 7 8 9
12	* Number of Cyclones or * Projected Change in Extreme Precip	* 1	2 3 4 5 6 7 8 9
13	* Number of Storm Events or * Hundred Year High Water	* 1	2 3 4 5 6 7 8 9
14	* Number of Storm Events or * Projected Change in Extreme Precip	* 1	2 3 4 5 6 7 8 9
15	* Hundred Year High Water or * Projected Change in Extreme Precip	* 1	2 3 4 5 6 7 8 9

CR = 0% Please start pairwise comparison

☒ AHP ☐ Balanced scale



## Pairwise Comparisons:

With respect to *Seaport Climate Sensitivity*, which criterion is more important, and how much more on a scale 1 to 9?

1. Refer to Data Dictionary for descriptions of indicators
2. For each pair, indicate which is more important
3. Then, indicate how much more (1 – 9)
4. Click “Check Consistency,” & adjust your responses if necessary
5. Click “Submit\_Priorities”

A – vs Sensitivity – or B?		Equal	How much more?
1	* Population Inside Floodplain or * Average Cost of Storm Events	* 1	2 3 4 5 6 7 8 9
2	* Population Inside Floodplain or * Number Critical Habitat Areas	* 1	2 3 4 5 6 7 8 9
3	* Population Inside Floodplain or * Soil Social Vulnerability Score	* 1	2 3 4 5 6 7 8 9
4	* Population Inside Floodplain or * Population Change	* 1	2 3 4 5 6 7 8 9
5	* Population Inside Floodplain or * Environmental Sensitivity Index ESI	* 1	2 3 4 5 6 7 8 9
6	* Average Cost of Storm Events or * Number Critical Habitat Areas	* 1	2 3 4 5 6 7 8 9
7	* Average Cost of Storm Events or * Soil Social Vulnerability Score	* 1	2 3 4 5 6 7 8 9
8	* Average Cost of Storm Events or * Population Change	* 1	2 3 4 5 6 7 8 9
9	* Average Cost of Storm Events or * Environmental Sensitivity Index ESI	* 1	2 3 4 5 6 7 8 9
10	* Number Critical Habitat Areas or * Soil Social Vulnerability Score	* 1	2 3 4 5 6 7 8 9
11	* Number Critical Habitat Areas or * Population Change	* 1	2 3 4 5 6 7 8 9
12	* Number Critical Habitat Areas or * Environmental Sensitivity Index ESI	* 1	2 3 4 5 6 7 8 9
13	* Soil Social Vulnerability Score or * Population Change	* 1	2 3 4 5 6 7 8 9
14	* Soil Social Vulnerability Score or * Environmental Sensitivity Index ESI	* 1	2 3 4 5 6 7 8 9
15	* Population Change or * Environmental Sensitivity Index ESI	* 1	2 3 4 5 6 7 8 9

CE = 06 Please start pairwise comparison

\* App \* Balanced scale

## Pairwise Comparisons:

With respect to *Seaport Climate Sensitivity*, which criterion is more important, and how much more on a scale 1 to 9?

1. Refer to Data Dictionary for descriptions of indicators
2. For each pair, indicate which is more important
3. Then, indicate how much more (1 – 9)
4. Click “Check Consistency,” & adjust your responses if necessary
5. Click “Submit\_Priorities”

**Sensitivity:** The degree to which a system is affected, either adversely or beneficially, by climate and extreme weather impacts

**Example:** a port with a storm surge barrier may be *less sensitive* to storm driven flooding impacts than a similar port without a storm surge barrier.

## Submit Answers:

1. Click “**Submit for group eval**”
2. [Optional] “**View group result**”
3. Click “**Done**”

# Thank You!

You are helping make seaports  
more resilient!

15

## Definitions: (from Data Dictionary)

- **Vulnerability:** The degree to which a system is susceptible to, and unable to cope with, adverse effects of climate change, including climate variability and extremes. Vulnerability is a function of the character, magnitude, and rate of climate change and variation to which a system is *exposed*, its *sensitivity*, and its *adaptive capacity*.

16

## Definitions: (from Data Dictionary)

- **Exposure:** The presence of people, livelihoods, species or ecosystems, environmental functions, services, and resources, infrastructure, or economic, social, or cultural assets in places and settings that could be adversely affected
- **Sensitivity:** The degree to which a system is affected, either adversely or beneficially, by climate-related stimuli
- **Adaptive Capacity:** The ability of systems, institutions, humans and other organisms to adjust to potential damage, to take advantage of opportunities, or to respond to consequences

17

How the Three Components of Climate Vulnerability Relate to Seaports:

**Exposure** is a measure of the extent to which a port is located in the path of climate and extreme weather impacts, regardless of whether the port is susceptible to damage or not.

Example: a port on the US East Coast has a **higher exposure** to hurricanes than a port on the US West Coast.

**Sensitivity** is a measure of the extent to which a port is affected negatively (or positively) by climate and extreme weather impacts.

Example: a port with a storm surge barrier may be **less sensitive** to storm driven flooding impacts than a similar port without a storm surge barrier.

**Adaptive Capacity** is a measure of a port's ability to adjust, take advantage of, or respond to climate and extreme weather impacts.

Example: a port with a robust master plan that considers climate resilience and has a high degree of operational flexibility may have a **higher adaptive capacity** than a port with minimal planning and low redundancy

## Appendix L: Radar Plots for the 22 Ports Studied

The composite-indices generated for the studied ports retain the ability to explore the disaggregated substructure behind the composite scores for each of the indicators. Users are able to ask “*Why* does a particular vulnerability indicator score ‘high’ or ‘low’ according to this index?”

Figure L-1. The disaggregated substructure of the composite-index vulnerability scores for the Port of Albany, NY. Indicators of *exposure* are on the left half of the plot, and indicators of *sensitivity* are on the right half. Comparing individual indicators reveals differences underlying the port’s vulnerability. Indicators for the “Hundred Year High Water” scored higher than any other indicator, the second highest indicator being the “Environmental Index.”

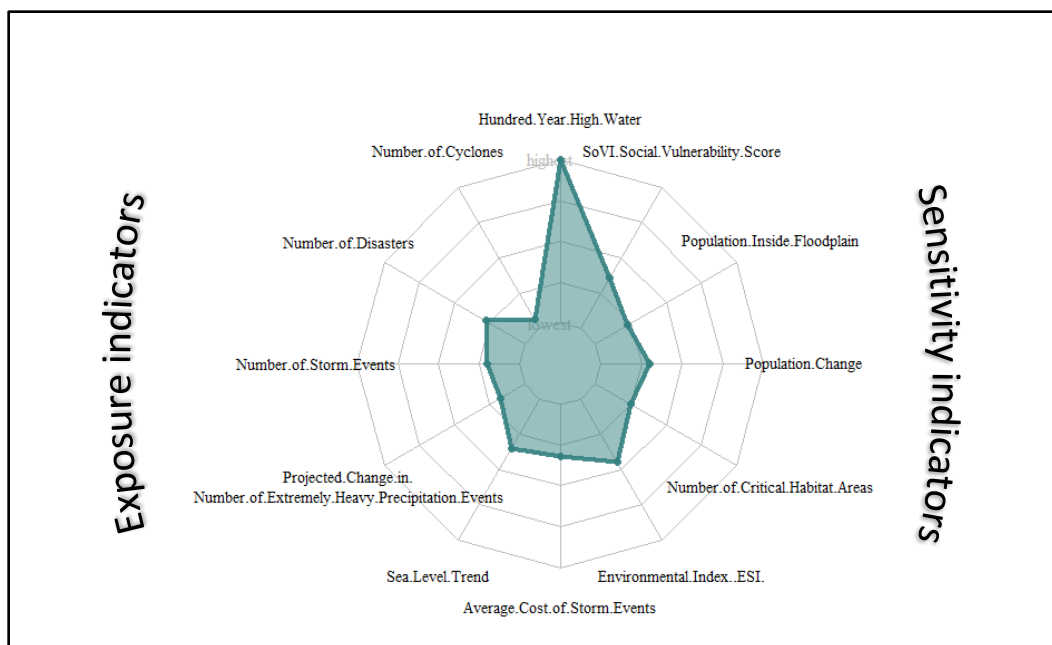




Figure L-2. The disaggregated substructure of the composite-index vulnerability scores for the Port of Baltimore, MD. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for the "Average Cost of Storm Events" and the "Social Vulnerability Score" scored higher than any other indicator.

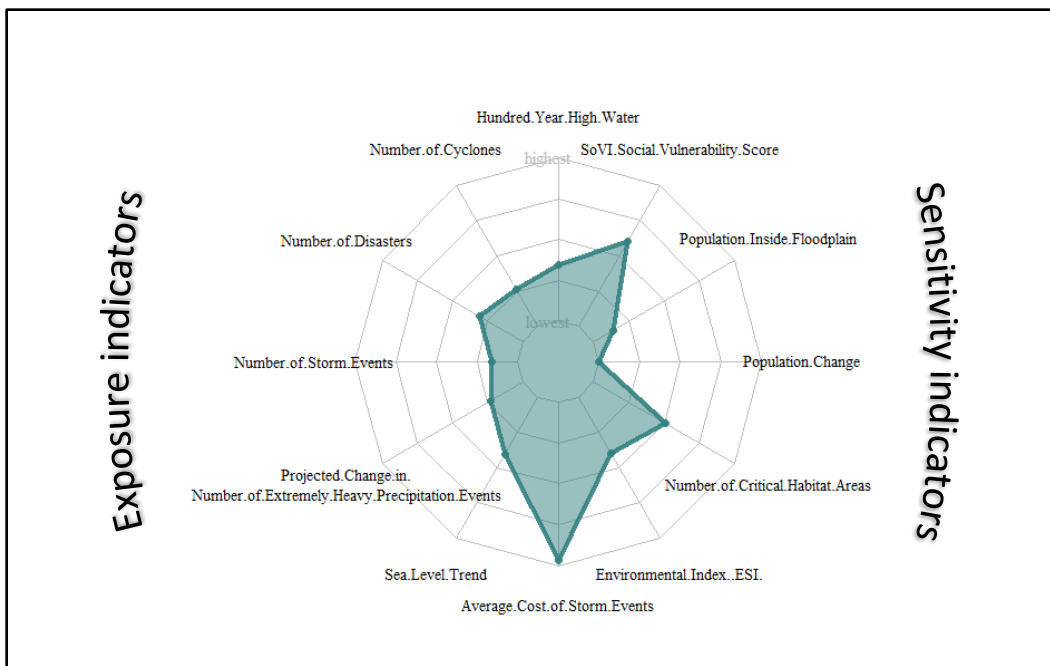


Figure L-3. The disaggregated substructure of the composite-index vulnerability scores for the Port of Boston, MA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Number of Cyclones" and "Population inside Floodplain" scored higher than the indicator for "Number of Disasters."

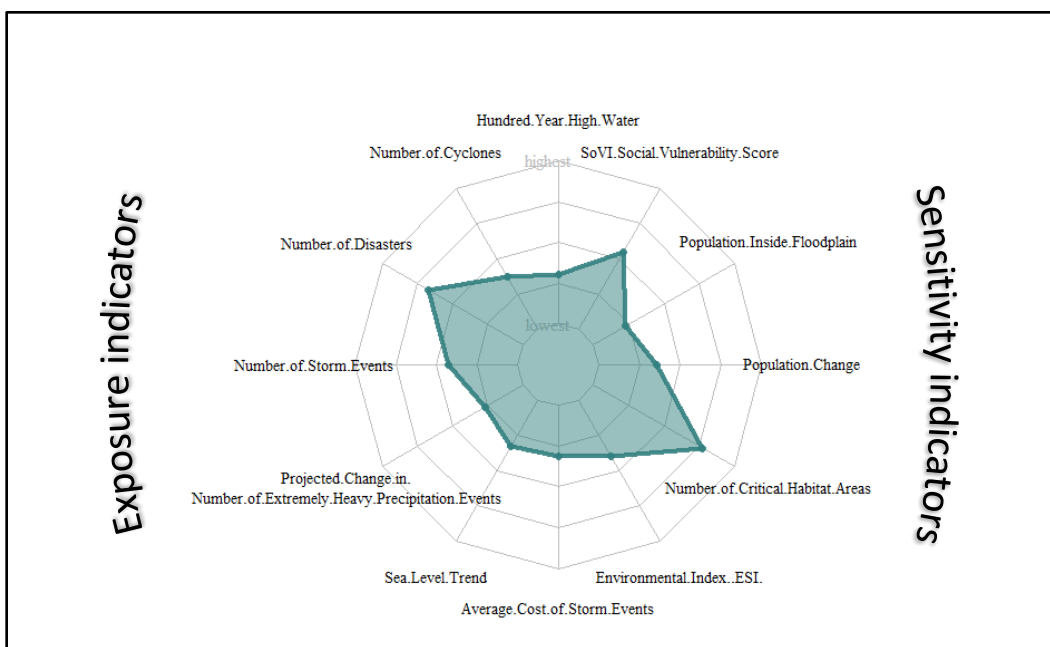


Figure L-4. The disaggregated substructure of the composite-index vulnerability scores for the Port of Bridgeport, CT. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals very small differences underlying the port's vulnerability. Indicators for "Population Inside Floodplain," "Environmental Index," "Number of Storm Events" and "Number of Disasters."

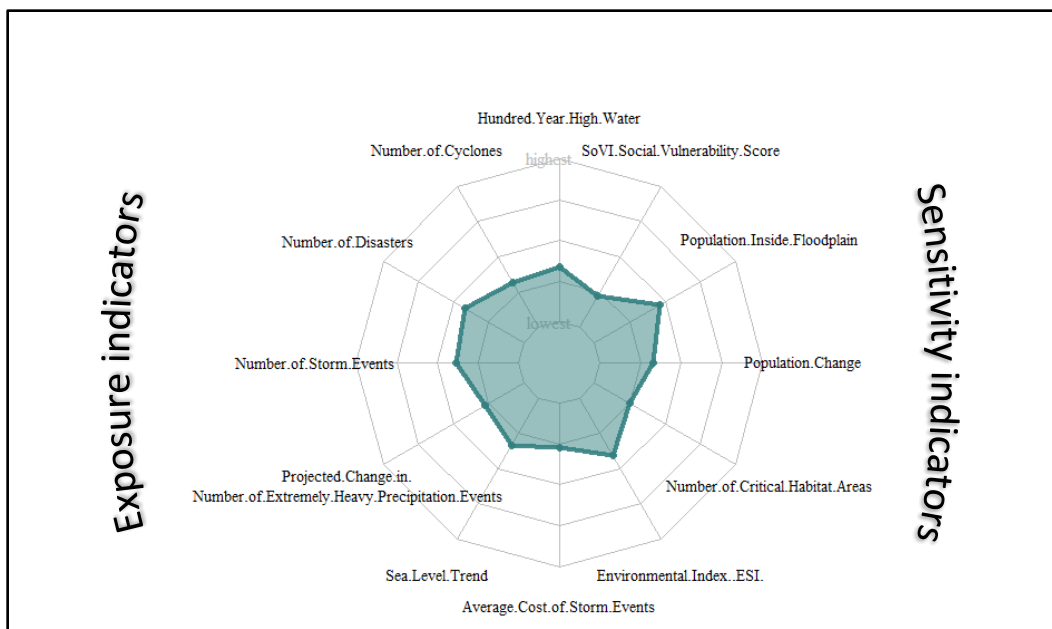


Figure L-5. The disaggregated substructure of the composite-index vulnerability scores for the Port of Camden-Gloucester, NJ. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population Change" and "Number of Storm Events" scored higher than the indicators for "Number of Cyclones" and "Hundred Year High Water."

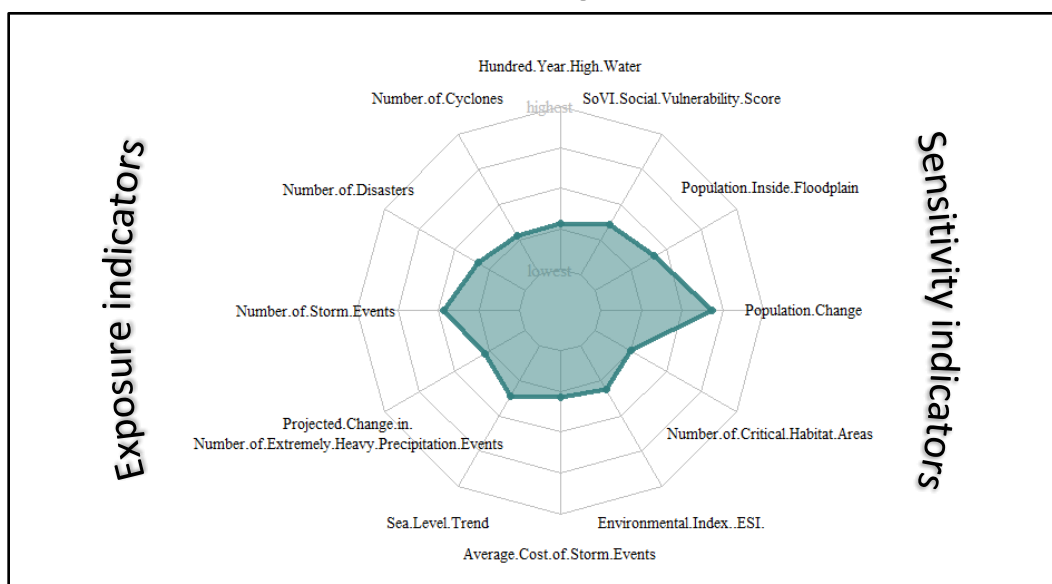


Figure L-6. The disaggregated substructure of the composite-index vulnerability scores for the Port of Chester, PA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Number of Storms" and "Sea Level Trend" scored higher than other indicators.

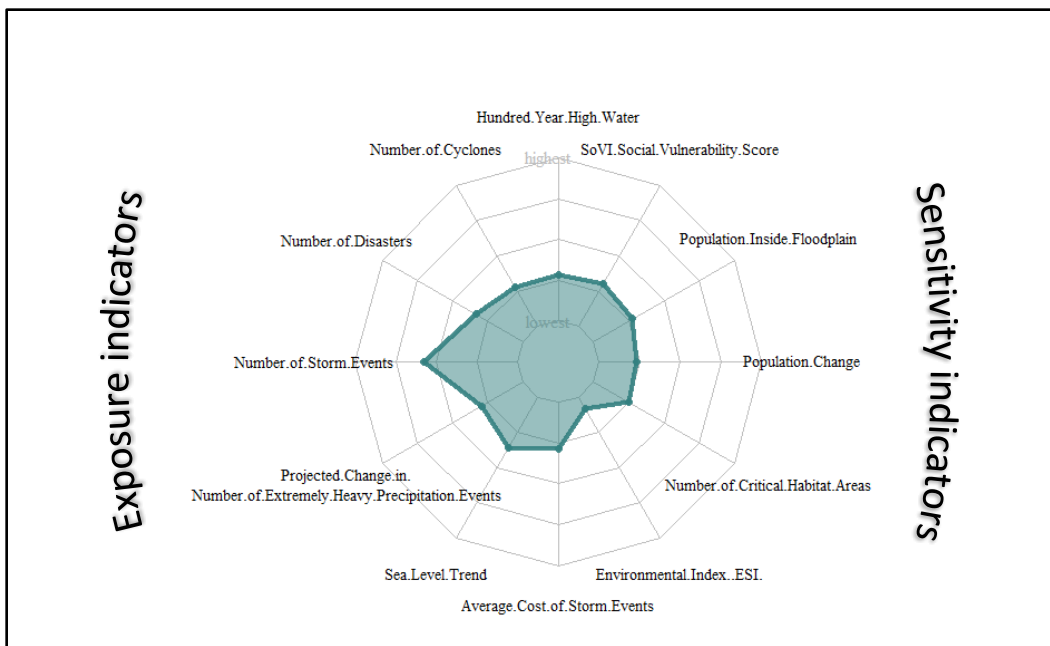


Figure L-7. The disaggregated substructure of the composite-index vulnerability scores for the Port of Fall River, MA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population Inside Flood Plain" and "Number of Critical Habitat Areas" scored higher than "Sea Level Trends."

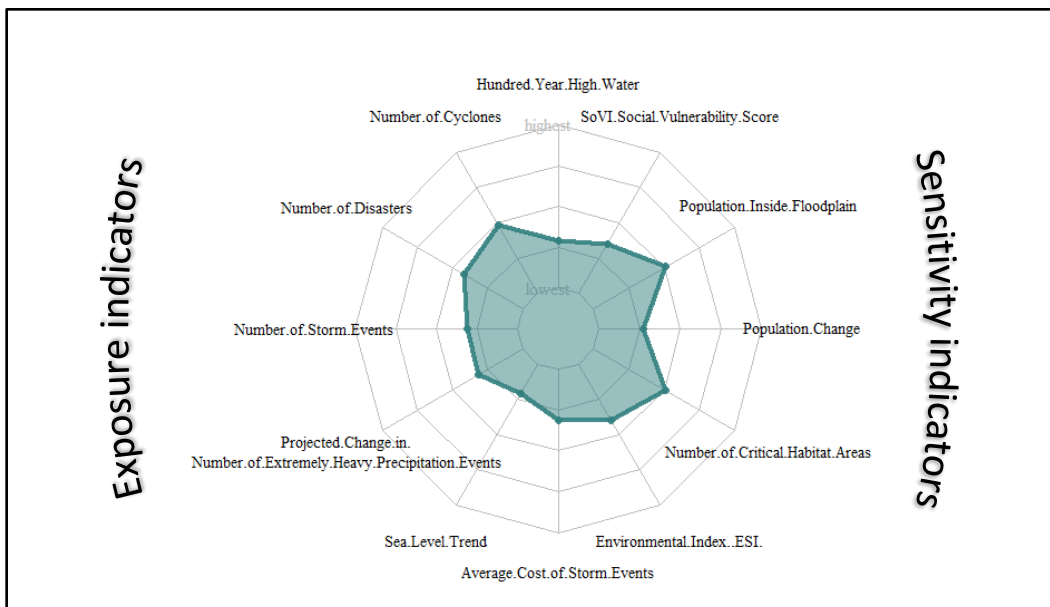


Figure L-8. The disaggregated substructure of the composite-index vulnerability scores for the Port of Hempstead, NY. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population inside Flood Plain," "Environmental Index - ESI" and "Hundred Year High Water" scored higher than the "Social Vulnerability Score."

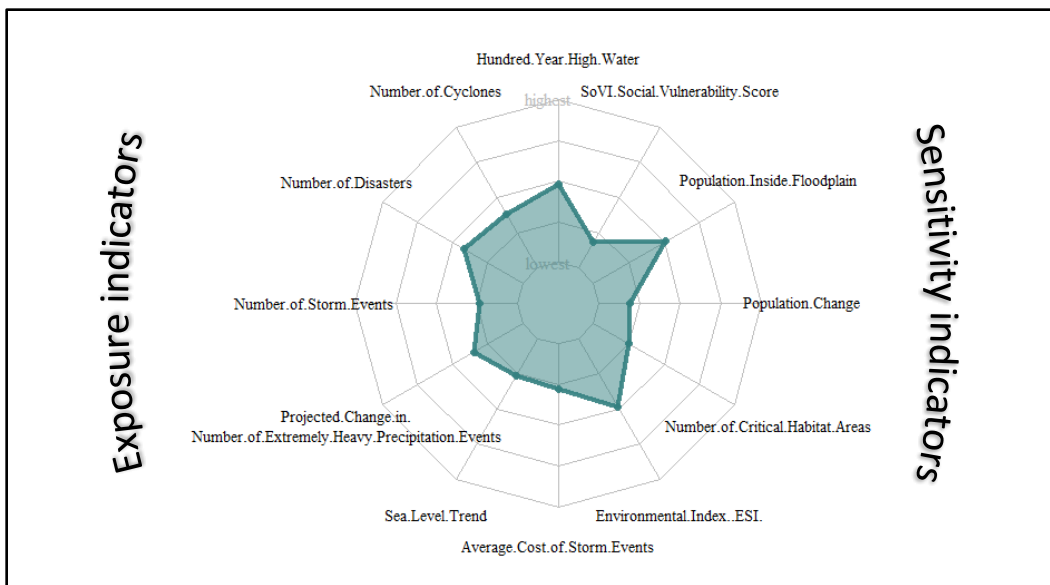


Figure L-9. The disaggregated substructure of the composite-index vulnerability scores for the Port of Hopewell, VA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Projected Change in Number of Extremely Heavy Precipitation Events" and "Sea Level Trend" scored higher than "Number of Storm Events" or "Number of Disasters."

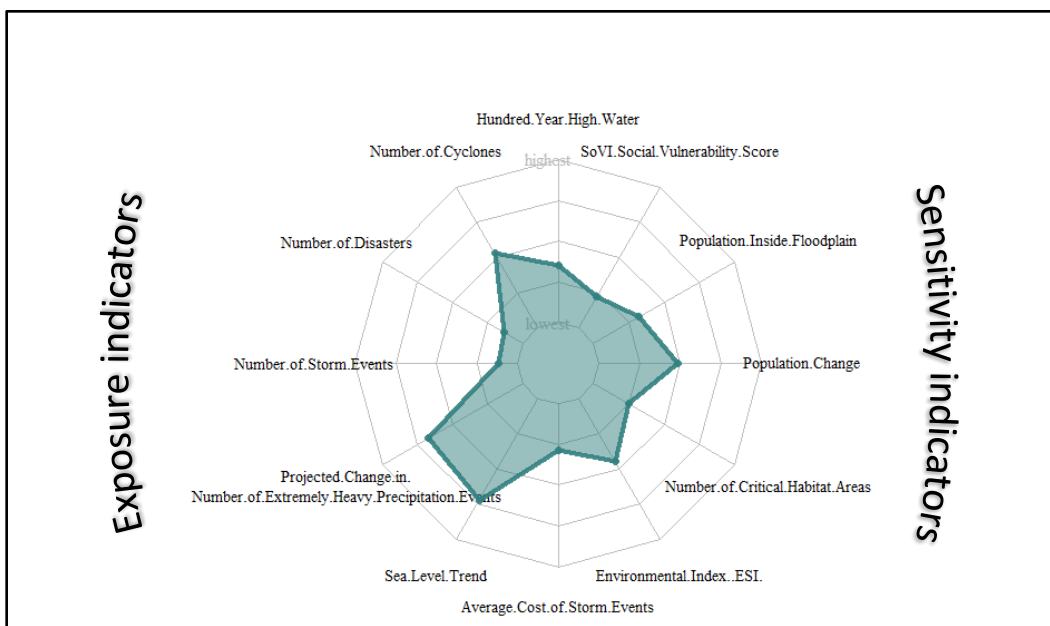


Figure L-10. The disaggregated substructure of the composite-index vulnerability scores for the Port of Marcus Hook, PA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Number of Storm Events" scored higher than most of other indicators and the "Environmental Index - ESI" scored the lowest.

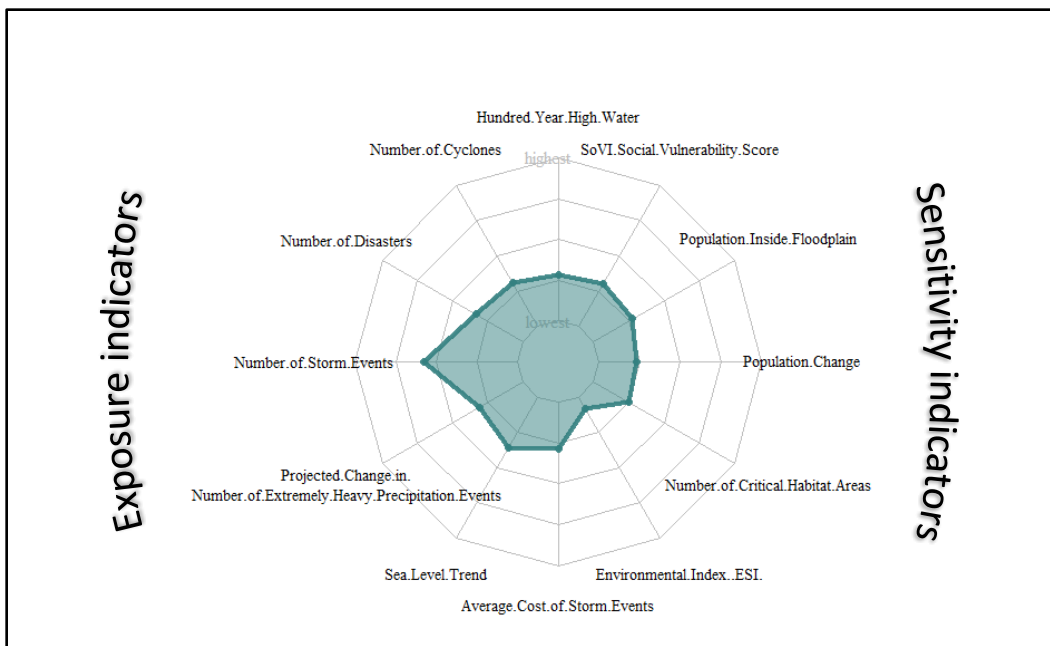


Figure L-11. The disaggregated substructure of the composite-index vulnerability scores for the Port of New Haven, CT. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Average Cost of Storm Events" scored higher than most of all the indicators, the second highest one being "Number of Disasters."

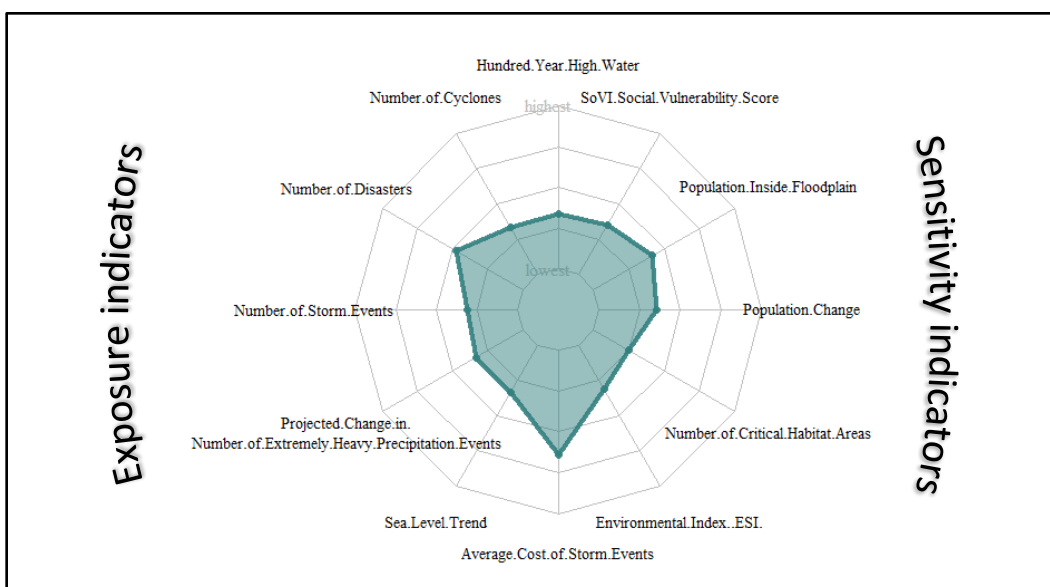


Figure L-12. The disaggregated substructure of the composite-index vulnerability scores for the Port of New York and New Jersey, NY and NJ. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicator for the "Social Vulnerability" scored higher than the indicator for "Number of Storm Events."

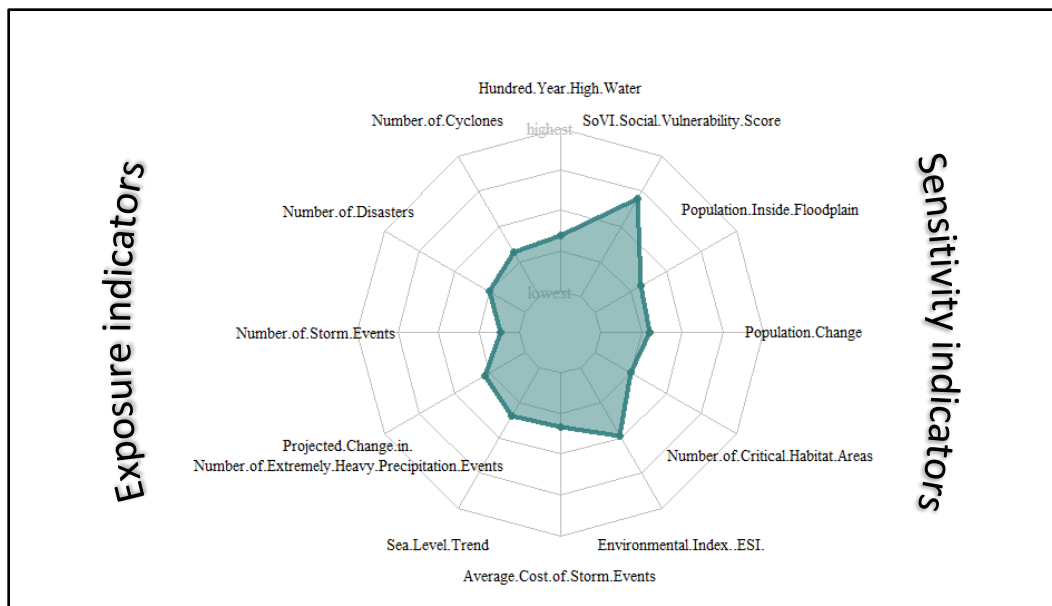


Figure L-13. The disaggregated substructure of the composite-index vulnerability scores for the Port of Paulsboro, PA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population Change" scored high, while the "Social Vulnerability Score", the "Number of Critical Habitat Areas" and the "Projected Change in Number of Extremely Heavy Precipitation Events" scored the lowest.

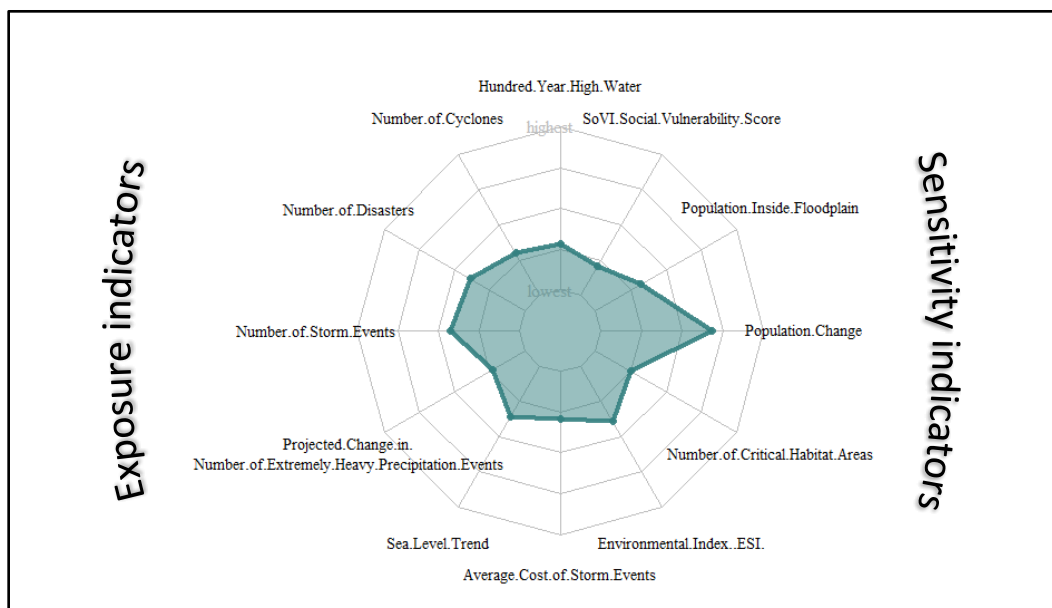


Figure L-14. The disaggregated substructure of the composite-index vulnerability scores for the Port of Penn Manor, PA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Most indicators scored low with the "Social Vulnerability Score" and the "Environmental Index - ESI" indicators scoring the lowest.

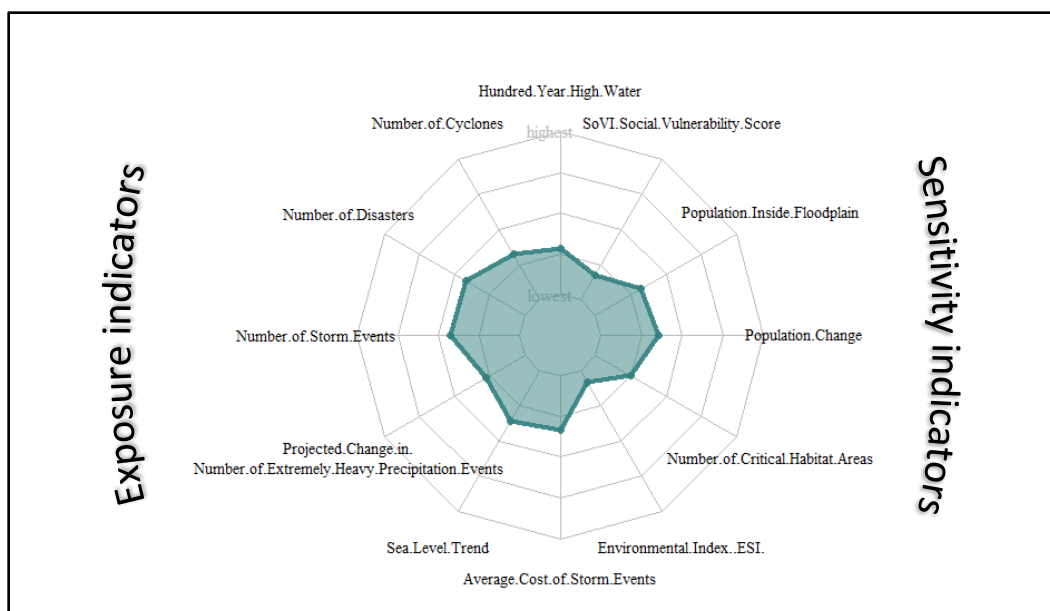


Figure L-15. The disaggregated substructure of the composite-index vulnerability scores for the Port of Philadelphia, PA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Projected Change in Number of Extremely Heavy Precipitation Events" and the "Social Vulnerability" scored higher than the indicators for "Environmental Index" and "Population Inside Floodplain."

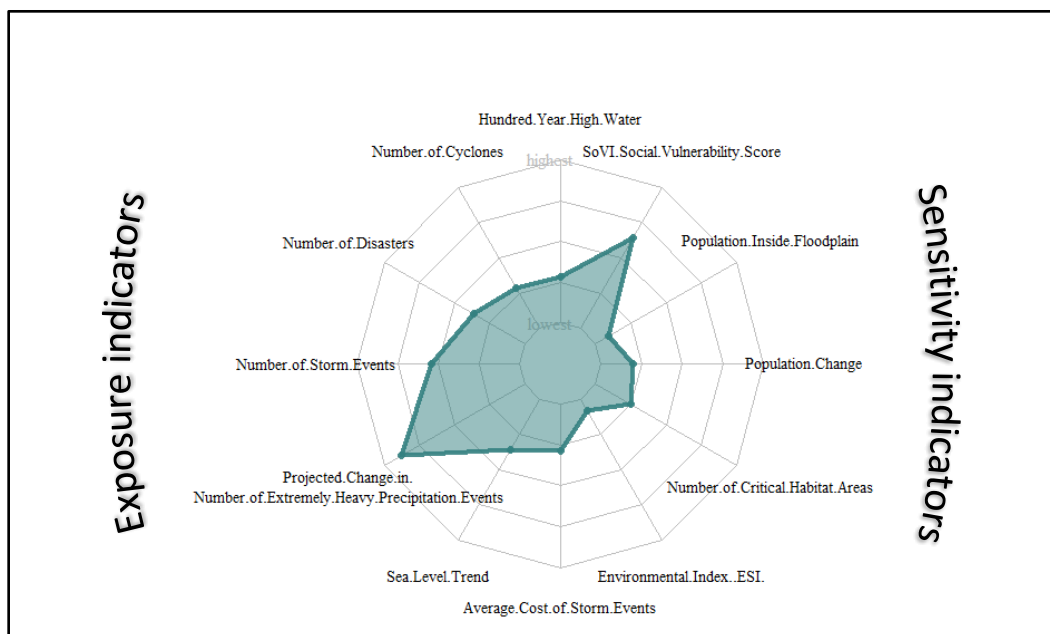


Figure L-16. The disaggregated substructure of the composite-index vulnerability scores for the Port of Portland, ME. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Number of Disasters" and "Projected Change in Number of Extremely Heavy Precipitation Events" scored higher than the indicator for "Sea Level Trend."

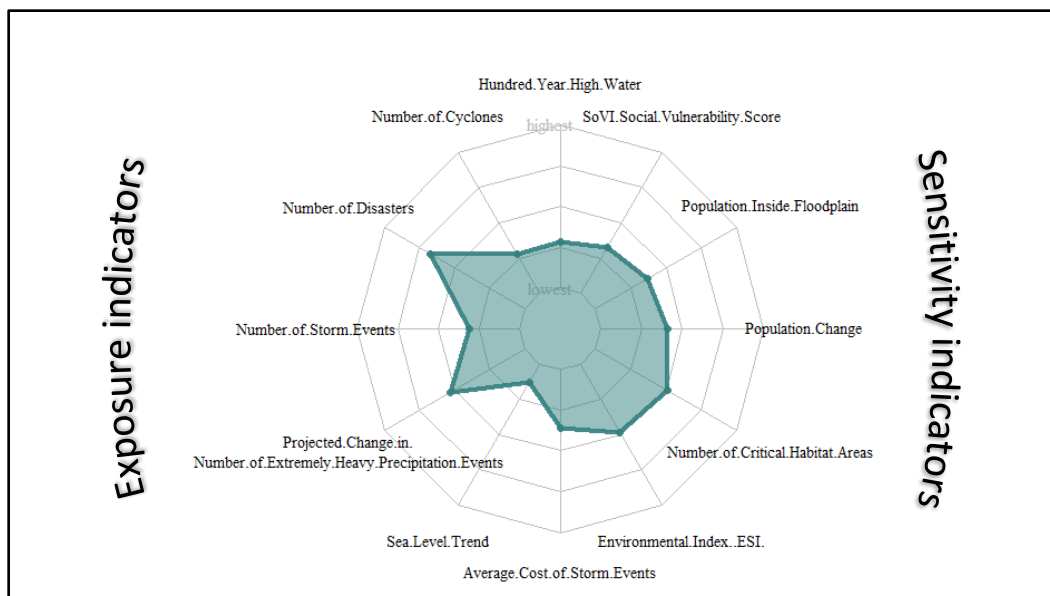


Figure L-17. The disaggregated substructure of the composite-index vulnerability scores for the port of Port Jefferson, NY. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. The indicator for "Number of Storm Events" scored higher than the indicators for "Social Vulnerability Score" and "Population inside Floodplain."

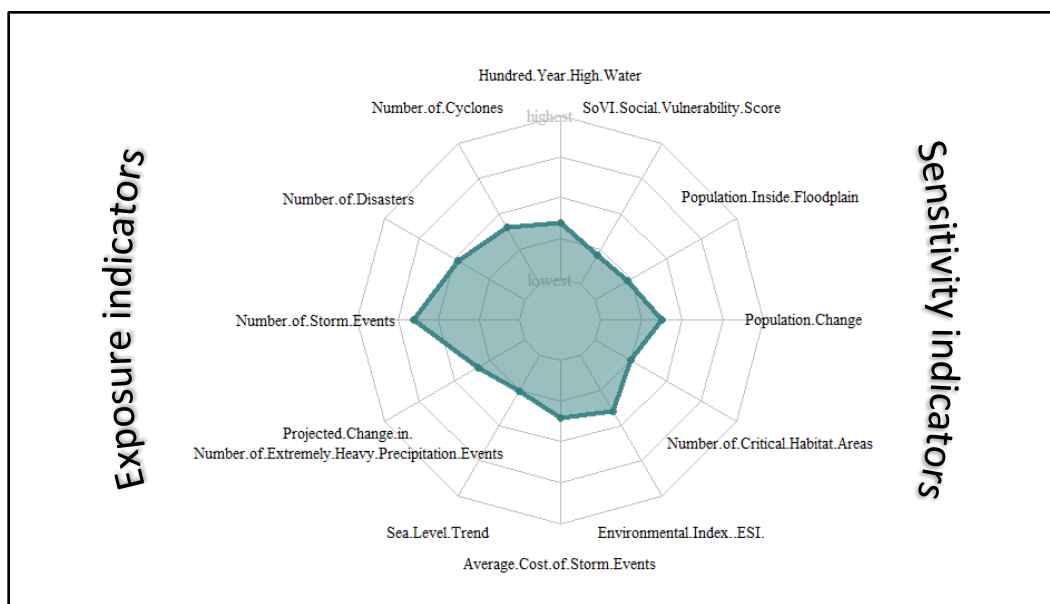




Figure L-18. The disaggregated substructure of the composite-index vulnerability scores for the Port of Portsmouth, NH. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population Inside Floodplain" and the "Environmental Index - ESI" scored higher than the indicators for "Sea level Trend" and the "Social Vulnerability Score."

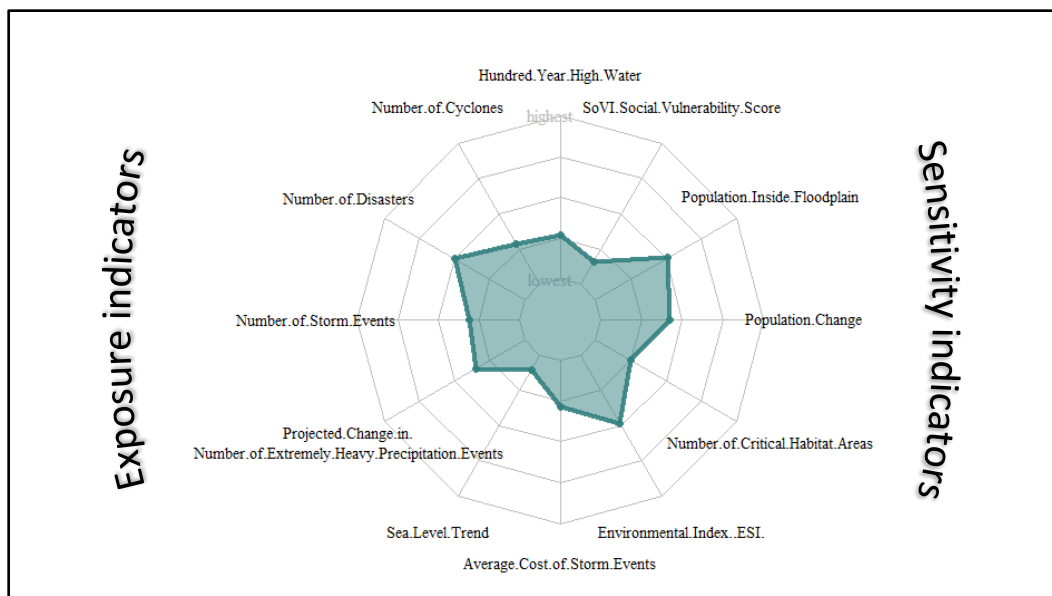


Figure L-19. The disaggregated substructure of the composite-index vulnerability scores for the Port of Providence Port, RI. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals only slight differences underlying the port's vulnerability. Indicator for "Number of Critical Habitat Areas" scored higher than the indicator for the "Number of Storm Events."

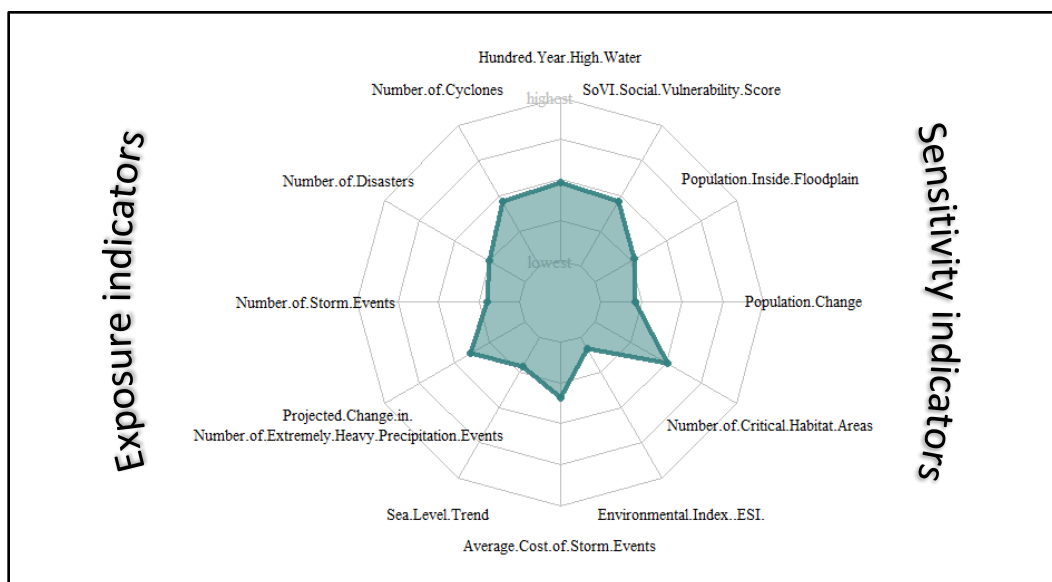


Figure L-20. The disaggregated substructure of the composite-index vulnerability scores for the Port of Searsport, ME. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Population Change," "Number of Critical Habitat Areas and the "Environmental Index – ESI" scored higher than the indicator for the "Number of Storm Events."

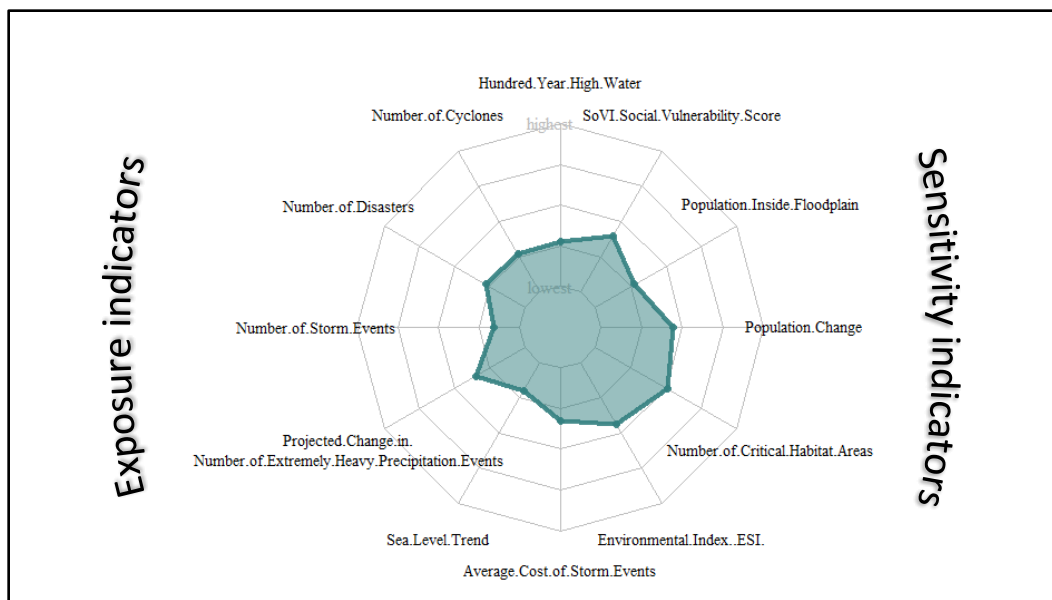


Figure L-21. The disaggregated substructure of the composite-index vulnerability scores for the Port of Virginia, VA. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals only slight differences underlying the port's vulnerability. Indicators for "Number of Cyclones" and "Population Inside Floodplain" scored higher than the indicators for the "Number of Disasters."


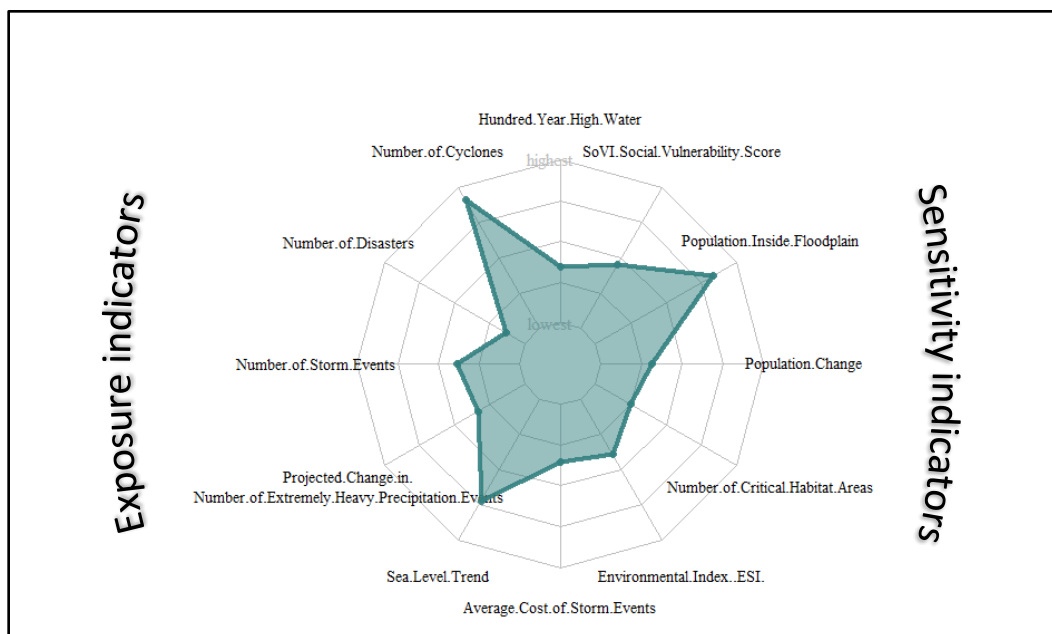


Figure L-22. The disaggregated substructure of the composite-index vulnerability scores for the Port of Wilmington, DE. Indicators of exposure are on the left half of the plot, and indicators of sensitivity are on the right half. Comparing individual indicators reveals differences underlying the port's vulnerability. Indicators for "Projected Change in Number of Extremely Heavy Precipitation Events" and "Number of Storm Events" scored higher than the indicator for the "Number of Disasters."

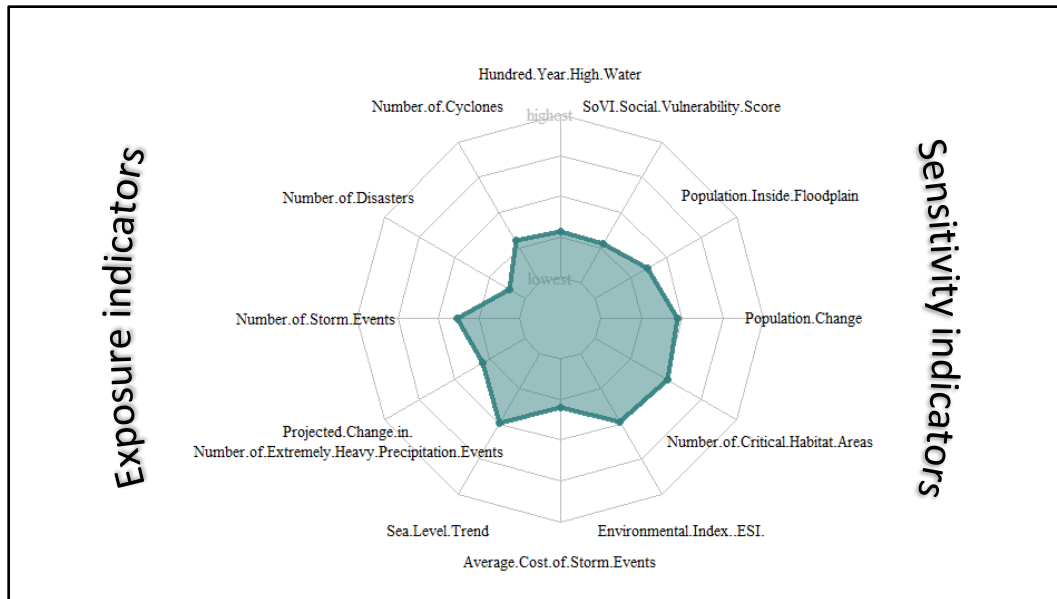

## Appendix M: Abbreviations and Acronyms

AHP	Analytic Hierarchy Process
CENAD	Corps of Engineers North Atlantic Division
CCVA	Climate Change Vulnerability Assessment
ERDC	U.S. Army Engineer Research and Development Center
GIS	Geographic Information System
IBVA	Indicator-Based Vulnerability Assessment
IPCC	Intergovernmental Panel for Climate Change
KRNL	Knowledge Resource Nomination Worksheet
MTS	Marine Transportation System
RIAT	Resilience Integrated Action Team
URI	University of Rhode Island
USACE	United States Army Corps of Engineers (U.S. government)
VAS	Visual Analogue Scale
WSM	Weighted Sum Model

## Unit Conversion Factors

Multiply	By	To Obtain
acres	4,046.873	Square meters
feet	0.3048	Meters
gallons (U.S. liquid)	3.785412 E-03	cubic meters
gross tons (2,240pounds)	1.2023	Metric tons
Inches	0.0254	Meters
horsepower (550 foot-pounds force per second)	745.6999	watts
knots	0.5144444	meters per second
miles (nautical)	1,852	meters
miles (U.S. statute)	1,609.347	Meters
mils	0.0254	Millimeters
quarts (U.S. liquid)	9.463529 E-04	cubic meters
tons (long) per cubic yard	1,328.939	kilograms per cubic meter
tons (2,000 pounds, mass) or short tons	907.1847	Kilograms
tons (2,000 pounds, mass) per square foot	9,764.856	kilograms per square meter
tons (2,000 pounds, mass)	1.2023	Metric tons
yards	0.9144	meters

REPORT DOCUMENTATION PAGE					Form Approved OMB No. 0704-0188	
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p><b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b></p>						
1. REPORT DATE November 2019		2. REPORT TYPE Report 1 of 2		3. DATES COVERED (From - To)		
4. TITLE AND SUBTITLE Measuring Climate and Extreme Weather Vulnerability to Inform Resilience,  Report 1: A Pilot Study for North Atlantic Medium- and High-Use Maritime Freight Nodes				5a. CONTRACT NUMBER		
				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)  R. Duncan McIntosh, Elizabeth L. Mclean, and Austin Becker				5d. PROJECT NUMBER W912HZ-16-C-0019		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER 33143		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of Rhode Island Department of Marine Affairs 1 Greenhouse Road – Suite 205 Kingston, RI 02881				8. PERFORMING ORGANIZATION REPORT NUMBER  ERDC/CHL CR-19-2		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Engineer Research and Development Center Coastal and Hydraulics Laboratory, Navigation Systems Research Program Vicksburg, MS 39180-6199				10. SPONSOR/MONITOR'S ACRONYM(S) ERDC		
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.						
13. SUPPLEMENTARY NOTES						
14. ABSTRACT This research identified vulnerability indicators from open-data sources that represent the three components of vulnerability, as outlined by the Intergovernmental Panel on Climate Change: exposure, sensitivity, and adaptive capacity. With input from experts knowledgeable in port operations, planning, policy, and data, researchers refined a set of high-level vulnerability indicators to answer the following key questions: (1) how sufficient is the current state of U.S. seaport sector data for developing expert-supported vulnerability indicators for a regional sample of ports and (2) how can indicators be used to measure the relative vulnerability (i.e., exposure, sensitivity, and adaptive capacity) of multiple ports? Using open-data sources, this study developed an Indicator-Based Vulnerability Assessment methodology that integrates multiple vulnerability indicators for ports in the North Atlantic region. The Analytic Hierarchy Process, a technique for organizing and analyzing complex decisions using pairwise comparisons, was used to develop a ranking that matched 3 of the top-4 most vulnerable ports that were subjectively identified by port experts. This demonstrates strong promise for this methodological approach to measure seaport vulnerability to climate and extreme weather events. Indices of seaport relative vulnerability to climate and extreme weather can advance goals for a resilient Marine Transportation System by informing efforts and plans to prioritize and allocate limited resources.						
15. SUBJECT TERMS Climatic changes—Risk assessment, Harbors, Inland navigation, Navigable waters, Navigation, Waterways						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT  SAR	18. NUMBER OF PAGES  206	19a. NAME OF RESPONSIBLE PERSON Katherine Chambers	
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code) 202-761-7582	